



Simplify Your Work.™

HVAC/R PRODUCT CATALOG

ISSUE 27



EQUIPMENT MOUNTING 1



CONDENSATE MANAGEMENT 21



DEVCO 41
ELECTRICAL 71



TOOLS 97




COMPONENTS AND CONSUMABLES 149



INDOOR AIR QUALITY 202



EQUIPMENT MOUNTING

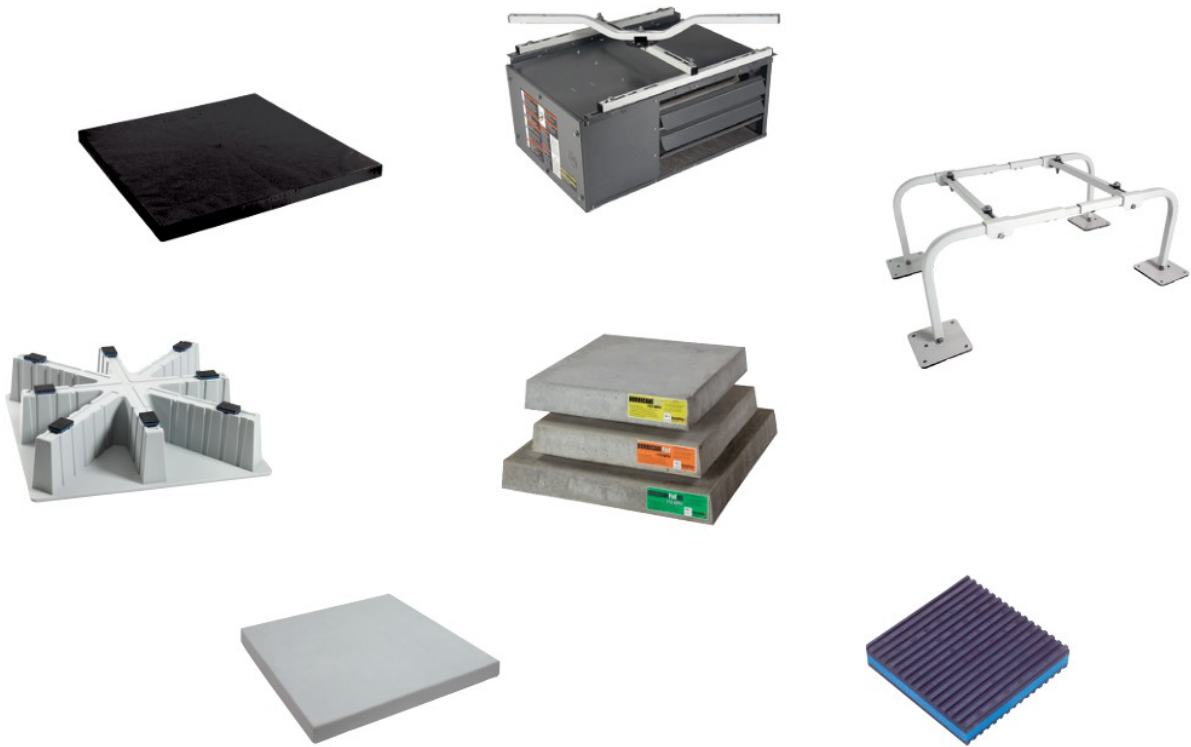

PADS

Standard Plastic Pads	2
The Heat Pump Pad	3
Standard Concrete Pads	3-5
Hurricane Pads	5-6

EQUIPMENT STANDS

Ductless Mini-Split Stands	6-8
VRF Stands	8
Air Handler Stands	9
Boiler and Water Heater Stands	9
Stand Accessories	10

WALL BRACKETS

Condenser Wall Brackets	11
Ductless Mini-Split Brackets	11

MOUNTING BLOCKS, FEET AND RISERS

Air Handler - Furnace Blocks	12
Condenser Blocks and Feet	12
Heat Pump Riser	13

HANGING BRACKETS

Unit Heater Swivel Brackets	13
Air Handler Hanging Bracket	14

MOUNTING ACCESSORIES

Anti-Vibration Pads	14
Tie Down Clips	15
Vibration Isolation Strips	15
Rain and Snow Shields	15
Strut Clips and Clamps	16-20

EQUIPMENT MOUNTING | PADS

STANDARD PLASTIC PADS

E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with a size label and a symbol representing content of recycled material.



2" E Lite® Pads

The 2" thick E Lite® pad is the choice for plastic pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EL2424-2	24 X 24	6	44	310	EA	44
EL2430-2	24 X 30	9	22	203	EA	22
EL2436-2	24 X 36	10	22	270	EA	22
EL2626-2	26 X 26	9	22	201	EA	22
EL3030-2	30 X 30	9	22	209	EA	22
EL3036-2	30 X 36	13	22	290	EA	22
EL3040-2	30 X 40	14	22	307	EA	22
EL3232-2	32 X 32	10	22	231	EA	22
EL3434-2	34 X 34	14	22	306	EA	22
EL3636-2	36 X 36	12	22	291	EA	22
EL3640-2	36 X 40	18	22	380	EA	22
EL3648-2	36 X 48	25	22	384	EA	22
EL3842-2	38 X 42	17	22	446	EA	22

An injection molded equipment pad created from 100% recycled materials to minimize environmental impact. It does not require any additional equipment for moving and handling. EcoPad™ is resistant to impact, ultra-violet degradation and weathering (virtually impervious to climatic variations), and will not crack, flake, or warp. Drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to easily secure to the pad.



EP3636-2

EcoPad™ – 2"

The 2" thick EcoPad™ is the choice for plastic pads, Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EP2424-2	24 X 24 X 2	6	24	166	EA	24
EP2436-2	24 X 36 X 2	10	24	227	EA	24
EP2626-2	26 X 26 X 2	9	24	226	EA	24
EP3030-2	30 X 30 X 2	9	24	224	EA	24
EP3036-2	30 X 36 X 2	13	24	294	EA	24
EP3232-2	32 X 32 X 2	10	24	260	EA	24
EP3434-2	34 X 34 X 2	14	24	339	EA	24
EP3636-2	36 X 36 X 2	12	24	299	EA	24
EP3648-2	36 X 48 X 2	19	24	476	EA	24
EP3842-2	38 X 42 X 2	17	24	430	EA	24

Pad Feet

Pad-Disc is a circular insert pad foot that provides additional surface area and support under the pad, preventing pads from excess settling in loose soil conditions. These inserts are designed to fit only specific sizes of E Lite® and EcoPad™ that have the circular grid pattern footprint.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	UOM	ORDER MUL.
PAD-DISC	6	1	CS	1



PAD-DISC

3" E Lite® Pads

Codes have moved toward requiring 3" pads, check local codes for your requirements.



EL5658-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EL1838-3	18 X 38	9	32	320	EA	32
EL2424-3	24 X 24	9	16	157	EA	16
EL2436-3	24 X 36	12	16	230	EA	16
EL2448-3	24 X 48	14	32	629	EA	32
EL3030-3	30 X 30	12	16	209	EA	16
EL3232-3	32 X 32	13	16	251	EA	16
EL3244-3	32 X 44	21	16	354	EA	16
EL3636-3	36 X 36	16	16	291	EA	16
EL3640-3	36 X 40	23	16	360	EA	16
EL3648-3	36 X 48	25	16	402	EA	16
EL3842-3	38 X 42	18	16	308	EA	16
EL3870-3	38 X 70	36	16	557	EA	16
EL4040-3	40 X 40	26	16	412	EA	16
EL4558-3	45 X 58	43	16	674	EA	16
EL4848-3	48 X 48	36	16	604	EA	16
EL5042-3	50 X 42	28	16	555	EA	16
EL5060-3	50 X 60	40	16	712	EA	16
EL5070-3	50 X 70	47	16	805	EA	16
EL5252-3	52 X 52	40	16	648	EA	16
EL5658-3	56 X 58	55	16	884	EA	16

EcoPad™ – 3"

Used where codes have moved toward requiring 3" pads, check local codes for your requirements.



EP3636-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EP1838-3	18 X 38 X 3	9	32	292	EA	32
EP2424-3	24 X 24 X 3	9	16	150	EA	16
EP2436-3	24 X 36 X 3	12	16	210	EA	16
EP2448-3	24 X 48 X 3	14	32	645	EA	32
EP3030-3	30 X 30 X 3	12	16	212	EA	16
EP3232-3	32 X 32 X 3	13	16	220	EA	16
EP3434-3	34 X 34 X 3	21	16	291	EA	16
EP3636-3	36 X 36 X 3	16	16	271	EA	16
EP3640-3	36 X 40 X 3	23	16	360	EA	16
EP3648-3	36 X 48 X 3	25	16	433	EA	16
EP3842-3	38 X 42 X 3	18	16	311	EA	16
EP3870-3	38 X 70 X 3	36	16	545	EA	16
EP4040-3	40 X 40 X 3	26	16	406	EA	16
EP4558-3	45 X 58 X 3	43	16	725	EA	16
EP4848-3	48 X 48 X 3	36	16	591	EA	16
EP5042-3	50 X 42 X 3	28	16	511	EA	16
EP5060-3	50 X 60 X 3	40	16	705	EA	16
EP5070-3	50 X 70 X 3	47	16	808	EA	16
EP5252-3	52 X 52 X 3	40	16	633	EA	16
EP5658-3	56 X 58 X 3	55	16	884	EA	16

PADS | EQUIPMENT MOUNTING

THE HEAT PUMP PAD™

The Heat Pump Pad™

Provides an effective base for heat pump equipment installed in snowy climates. Rather than a combination of a typical 2" (or 3") equipment pad and 6" heat pump risers, the Heat Pump Pad™ provides a full 8" of elevation in a simple square footprint. The star pattern of the integral risers allows for installation of equipment with different size footprints up to 36" x 36". Also included are eight anti-vibration pads uniquely designed to fit into the guide slots on the top of the integral risers. The base is sloped outward to allow for easy drainage of condensate or defrost cycle condensate when the outdoor coil is operating in heat pump mode. Nestable for efficient shipping, transportation, and warehousing. Injection molded from concrete gray, recycled polypropylene material, the Heat Pump Pad™ is environmentally friendly and designed to last longer than the equipment it supports. US Patent Number 7,891,635, and other patent(s) pending.



HP3636-8




Nestable!

CATALOG NO.	SIZE	UOM	ORDER MUL.
HP3232-8	32" x 32" x 8"	EA	16
HP3636-8	36" x 36" x 8"	EA	16

STANDARD CONCRETE PADS

3" UltraLite® Pads

A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite® is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered expanded polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions.



UC2424-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
UC1636-3	16 X 36	18	30	565	EA	30
UC1838-3	18 X 38	20	30	625	EA	30
UC2424-3	24 X 24	18	15	295	EA	15
UC2430-3	24 X 30	22	15	332	EA	15
UC2436-3	24 X 36	26	15	415	EA	15
UC2442-3	24 X 42	28	15	445	EA	15
UC2448-3	24 X 48	30	15	475	EA	15
UC2626-3	26 X 26	17	15	280	EA	15
UC3030-3	30 X 30	23	15	370	EA	15
UC3036-3	30 X 36	25	15	400	EA	15
UC3040-3	30 X 40	33	15	520	EA	15
UC3232-3	32 X 32	26	15	415	EA	15
UC3237-3	32 X 37	29	15	460	EA	15
U3353-3	33 X 53	68	15	1,045	EA	15
UC3434-3	34 X 34	27	15	430	EA	15
UC3445-3	34 X 45	39	15	610	EA	15
UC3636-3	36 X 36	30	15	475	EA	15
UC3642-3	36 X 42	32	15	505	EA	15
UC3648-3	36 X 48	37	15	580	EA	15

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
U3650-3	36 X 50	62	15	955	EA	15
U3654-3	36 X 54	71	15	1,090	EA	15
U3660-3	36 X 60	49	15	760	EA	15
UC3842-3	38 X 42	35	15	550	EA	15
U3865-3	38 X 65	85	15	1,300	EA	15
U3870-3	38 X 70	113	15	1,720	EA	15
UC4040-3	40 X 40	34	15	535	EA	15
UC4042-3	40 X 42	36	15	565	EA	15
U4054-3	40 X 54	81	15	1,240	EA	15
U4550-3	45 X 50	82	15	1,255	EA	15
U4558-3	45 X 58	93	15	1,420	EA	15
U4848-3	48 X 48	85	15	1,300	EA	15
U4854-3	48 X 54	91	15	1,390	EA	15
U4866-3	48 X 66	108	15	1,645	EA	15
U5053-3	50 X 53	92	15	1,405	EA	15
U5056-3	50 X 56	97	15	1,480	EA	15
U5252-3	52 X 52	94	15	1,435	EA	15
U5557-3	55 X 57	109	15	1,660	EA	15

3" UltraLite® Wedge Pads

The UltraLite® Wedge Pad is designed for Lennox condensing units.



UC3132-3L

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
UC3132-3L	31 X 32	23.33	15	350	EA	15
UC3539-3L	35 X 39	33.46	15	502	EA	15
UC4044-3L	40 X 44	37.53	15	563	EA	15

EQUIPMENT MOUNTING | PADS

STANDARD CONCRETE PADS CONT'D

UltraLite® Earthquake Code Compliant Pads

Required nearly exclusively in Southern California, the UltraLite® pad is available for compliance with strict attachment provisions detailed in earthquake prone local building codes. UltraLite® earthquake code compliant pads are only available for sale in regions where local codes mandate installation of pads with these particular characteristics. Currently these locales include most of Southern California, portions of Washington, and portions of Oregon.



UC2424-3CA

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
UC1838-3CA	18 X 38	18	15	295	EA	15
UC2424-3CA	24 X 24	14	15	235	EA	15
UC2436-3CA	24 X 36	22	15	355	EA	15
UC2448-3CA	24 X 48*	28	15	445	EA	15
UC3030-3CA	30 X 30	22	15	355	EA	15
UC3036-3CA	30 X 36	25	15	400	EA	15
UC3232-3CA	32 X 32	24	15	385	EA	15
UC3636-3CA	36 X 36	28	15	445	EA	15
UC3642-3CA	36 X 42	32	15	505	EA	15
UC3648-3CA	36 X 48	37	15	580	EA	15
UC4040-3CA	40 X 40	34	15	535	EA	15

*With Strapping

3" CladLite® Pads


Used where codes have moved toward requiring 3" pads, check local codes for your requirements.



2424-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
1636-3	16 X 36	48	20	985	EA	20
2424-3	24 X 24	43	20	877	EA	20
2424-3-CORNER	24 X 24	43	20	877	EA	20
2436-3	24 X 36	60	20	1,215	EA	20
2448-3	24 X 48	84	20	1,695	EA	20
3030-3	30 X 30	62	20	1,255	EA	20
3036-3	30 X 36	73	20	1,487	EA	20
3232-3	32 X 32	68	20	1,379	EA	20
3237-3	32 X 37	73	20	1,485	EA	20
3636-3	36 X 36	80	20	1,633	EA	20
3640-3	36 X 40	97	20	1,969	EA	20
3648-3	36 X 48	109	20	2,207	EA	20
3660-3	36 X 60	163	15	2,470	EA	15
3842-3	38 X 42	120	20	2,417	EA	20
4042-3	40 X 42	170	10	1,605	EA	10
4550-3	45 X 50	184	15	2,785	EA	15
4558-3	45 X 58	203	15	3,070	EA	15
4766-3	47 X 66	219	10	2,215	EA	10
4848-3	48 X 48	184	15	2,785	EA	15
5053-3	50 X 53	197	15	2,980	EA	15

Concrete surface and superior performance at 20% the weight of conventional concrete pads. The cladding provides superior resistance to sun, moisture and freeze-thaw conditions; the engineered expanded polystyrene (EPS) core is virtually impervious to water, soil conditions, fungus and bacteria. Large CladLite® pads are further strengthened by continuous steel reinforcement throughout the cladding. CladLite® is code approved for installation throughout the U.S.



2424-2

2" CladLite® Pads

The 2" thick CladLite® pad is the choice for equipment pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
2436-2	24 X 36	50	25	1,275	EA	25
2442-2	24 X 42	57	25	1,450	EA	25
3030-2	30 X 30	36	25	925	EA	25
3036-2	30 X 36	43	25	1,093	EA	25
3040-2	30 X 40	60	25	1,525	EA	25
3232-2	32 X 32	44	25	1,125	EA	25
3434-2	34 X 34	51	25	1,300	EA	25
3636-2	36 X 36	63	25	1,598	EA	25
3640-2	36 X 40	71	25	1,798	EA	25
3648-2	36 X 48	88	25	2,220	EA	25

U.S. Patent number 4,505,449, and patents pending. ICBO No. PFC-5112.

2" HunkLite® Pads

HunkLite® Pads are designed to support outdoor HVAC equipment such as condensers, heat pumps, and continuous heating devices such as water heaters and pool heaters. Made from 3000+ psi solid concrete with continuous steel reinforcement, this pad is extremely durable even in extreme outdoor conditions, while being up to 18% lighter than solid concrete. HunkLite pads are specifically designed for local markets where solid concrete is required. Available in both 2" and 3", depending on local building codes requirements.



L2436-2

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
L2436-2	24x36x2	55	20	1091	EA	20
L3636-2	36x36x2	120	15	1825	EA	15

PADS | EQUIPMENT MOUNTING

STANDARD CONCRETE PADS CONT'D

3" HunkLite® Pads

HunkLite® Pads are designed to support outdoor HVAC equipment such as condensers, heat pumps, and continuous heating devices such as water heaters and pool heaters. Made from 3000+ psi solid concrete with continuous steel reinforcement, this pad is extremely durable even in extreme outdoor conditions, while being up to 18% lighter than solid concrete. HunkLite pads are specifically designed for local markets where solid concrete is required. Available in both 2" and 3", depending on local building codes requirements.



L2424-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
L2424-3	24x24x3	52	15	776	EA	15
L2436-3	24x36x3	106	15	1590	EA	15
L3030-3	30x30x3	69	10	1039	EA	10
L3036-3	30x36x3	94	15	1412	EA	15
L3048-3	30x48x3	120	15	1800	EA	15
L3232-3	32x32x3	87	15	1300	EA	15
L3636-3	36x36x3	105	10	1050	EA	10
L3642-3	36x42x3	120	10	1198	EA	10
L3648-3	36x48x3	135	10	1349	EA	10
L3842-3	38X42X3	215	10	2168	EA	10

THE HURRICANE PAD™ CONCRETE EQUIPMENT PADS

The Hurricane Pad™

Designed specifically for the hurricane prone regions of Florida and the Gulf Coast, The Hurricane Pad™ meets stringent local code requirements for wind resistance. Heavier than a normal concrete pad, this 4" pad provides sufficient weight to meet code. The Hurricane Pad meets the Florida Building Code Notice and can withstand winds up to 150 MPH. For certain taller equipment, The Hurricane T Class Pad™ is needed. Due to their extreme weight, standard freight terms for The Hurricane Pad only apply for shipment to FL, GA, & AL. All other shipments are shipped FOB Leesburg, FL.



H2424-4

CATALOG NO.	SIZE (IN.)	PALLET QTY.	UOM	ORDER MUL.
H1840-4	18 X 40	16	EA	16
H2424-4	24 X 24	16	EA	16
H2436-4	24 X 36	8	EA	8
H3030-4	30 X 30	8	EA	8
H3232-4	32 X 32	8	EA	8
H3636-4	36 X 36	8	EA	8
H3642-4	36 X 42	8	EA	8
H3648-4	36 X 48	8	EA	8
H3652-4	36 X 52	8	EA	8
H3654-4	36 X 54	8	EA	8
H3656-4	36 X 56	8	EA	8
H3672-4	36 X 72	8	EA	8
H3852-4	38 X 52	8	EA	8
H3865-4	38 X 65	8	EA	8
H3872-4	38 X 72	8	EA	8
H4040-4	40 X 40	8	EA	8
H4242-4	42 X 42	8	EA	8
H4558-4	45 X 58	8	EA	8
H5557-4	55 X 57	8	EA	8

The Hurricane T-Class Pad™

The Hurricane T Class Pad™ is even heavier than The Hurricane Pad™ and is designed to meet the higher wind loads of taller equipment. The taller the piece of equipment mounted to the pad, the greater the wind load on the pad. These heavier 4" pads provide sufficient weight to meet code for these taller condensing units. The Hurricane T-Class Pad meets the Florida Building Code Notice and can withstand winds up to 175 MPH. Due to their extreme weight, standard freight terms for The Hurricane Pad only apply for shipment to FL, GA, & AL. All other shipments are shipped FOB Leesburg, FL.



HT3030-4

CATALOG NO.	SIZE (IN.)	PALLET QTY.	UOM	ORDER MUL.
HT1840-4	18 X 24	10	EA	10
HT2436-4	24 X 36	5	EA	5
HT3030-4	30 X 30	5	EA	5
HT3232-4	32 X 32	5	EA	5
HT3636-4	36 X 36	5	EA	5
HT3648-4	36 X 48	5	EA	5
HT4040-4	40 X 40	5	EA	5
HT4242-4	42 X 42	5	EA	5
HT4558-4	45 X 58	5	EA	5

The Hurricane Pad™ MD

The new Hurricane Pad™ MD is the newest in concrete pad technology from DiversiTech. The Hurricane Pad MD is a solid concrete pad designed for the strict requirements of Miami Dade county. The Hurricane Pad MD meets the Florida Building Code Notice and can withstand winds up to 175 MPH. This pad is made from a minimum 7000PSI solid concrete. For Florida shipments only.



HMD3030-4

CATALOG NO.	SIZE (IN.)	PALLET QTY.	UOM	ORDER MUL.
HMD1840-4	18 X 40 X 4	5	EA	5
HMD3030-4	30 X 30 X 4	5	EA	5
HMD3636-4	36 X 36 X 4	5	EA	5
HMD3648-4	36 X 48 X 4	5	EA	5
HMD4040-4	40 X 40 X 4	5	EA	5

EQUIPMENT MOUNTING | PADS / EQUIPMENT STANDS

THE HURRICANE PAD™ CONCRETE EQUIPMENT PADS CONT'D

Pad Anchor System Kit

The DiversiTech® Pad Anchor Kit EP-TDK is used in hurricane prone areas to secure the condenser to The Hurricane Pad®. Angle brackets attach the condenser to The Hurricane Pad and anchor cables provide additional strength by securing it to the ground. Kit contains 2 galvanized angle brackets, 2 stainless steel anchor cables and anchors, and 16 #14 stainless steel self tapping screws. Drive rod EP-TDK-STAKE (sold separately) is needed to drive the anchors of the EP-TDK Pad Anchor Kit into the ground, and can be used for future installations.



HMD3030-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EP-TDK	PAD Anchor System Kit	EA	1
EP-TDK-STAKE	Drive Rod Tool for EP-TDK	EA	1

DUCTLESS MINI-SPLIT STANDS

Mini-Split Stands

Our Quick-Sling® Mini-Split Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed whackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service. Now available in Stainless Steel.



QSMS1200

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1200	Mini-Split Stand Thin - 12", Powder Coated Steel	EA	1
QSMS1201	Mini-Split Stand Wide - 12", Powder Coated Steel	EA	1
QSMS1201-AL	Mini-Split Stand Wide - 12", Unfinished Aluminum	EA	1
QSMS1201-PAL	Mini-Split Stand Wide - 12", Powder Coated Aluminum	EA	1
QSMS1201-SS	Mini-Split Stand Wide - 12", Stainless Steel	EA	1
QSMS1800	Mini-Split Stand Thin - 18", Powder Coated Steel	EA	1
QSMS1801	Mini-Split Stand Wide - 18", Powder Coated Steel	EA	1
QSMS1801-AL	Mini-Split Stand Wide - 18", Unfinished Aluminum	EA	1
QSMS1801-PAL	Mini-Split Stand Wide - 18", Powder Coated Aluminum	EA	1
QSMS1801-SS	Mini-Split Stand Wide - 18", Stainless Steel	EA	1
QSMS2400	Mini-Split Stand Thin - 24", Powder Coated Steel	EA	1
QSMS2401	Mini-Split Stand Wide - 24", Powder Coated Steel	EA	1
QSMS2401-AL	Mini-Split Stand Wide - 24", Unfinished Aluminum	EA	1
QSMS2401-PAL	Mini-Split Stand Wide - 24", Powder Coated Aluminum	EA	1
QSMS2401-SS	Mini-Split Stand Wide - 24", Stainless Steel	EA	1

EQUIPMENT STANDS | EQUIPMENT MOUNTING

DUCTLESS MINI-SPLIT STANDS CONT'D

Large Mini-Split Stands

The large Quick-Sling® Mini-Split Stand is made extra wide to accommodate larger equipment with up to 38" wide mounting hole locations. This stand comes with 2 mounting rails.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1204	Mini-Split Stand - Extra Wide - 2 Rails, EA 12" Tall, Powder Coated Steel	EA	1
QSMS1204-AL	Mini-Split Stand - Extra Wide - 2 Rails, EA 12" Tall, Unfinished Aluminum	EA	1
QSMS1204-PAL	Mini-Split Stand - Extra Wide - 2 Rails, EA 12" Tall, Powder Coated Aluminum	EA	1
QSMS1804	Mini-Split Stand - Extra Wide - 2 Rails, EA 18" Tall, Powder Coated Steel	EA	1
QSMS1804-AL	Mini-Split Stand - Extra Wide - 2 Rails, EA 18" Tall, Unfinished Aluminum	EA	1
QSMS1804-PAL	Mini-Split Stand - Extra Wide - 2 Rails, EA 18" Tall, Powder Coated Aluminum	EA	1
QSMS2404	Mini-Split Stand - Extra Wide - 2 Rails, EA 24" Tall, Powder Coated Steel	EA	1
QSMS2404-AL	Mini-Split Stand - Extra Wide - 2 Rails, EA 24" Tall, Unfinished Aluminum	EA	1
QSMS2404-PAL	Mini-Split Stand - Extra Wide - 2 Rails, EA 24" Tall, Powder Coated Aluminum	EA	1

Combo Mini-Split Stand

The combo unit stand accommodates two single or double outdoor mini-splits. Ideal for rooftop installations. Made from heavy duty 1-1/2" square tubing and large 12" x 12" square feet.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS4000-12	Combo Mini-Split Stand - 12"	EA	1
QSMS4000-18	Combo Mini-Split Stand - 18"	EA	1
QSMS4000-24	Combo Mini-Split Stand - 24"	EA	1

Mini-Split Super Stand

The Quick-Sling® Mini-Split Super Stand accommodates up to 6 outdoor mini-split condensing units on a single stand. With the addition of the extender kits condensing units can be added in increments of 2 per kit. The Mini-Split Super Stand is made from the same heavy-duty steel structural design as the VRF Super Stands.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS3001-12	Mini-Split Super Stand, 6 systems, 12" High	EA	1
QSMS3001-18	Mini-Split Super Stand, 6 systems, 18" High	EA	1
QSMS3001-24	Mini-Split Super Stand, 6 systems, 24" High	EA	1
QSMS3001-12EXT	Mini-Split Super Stand Extender Kit, 2 systems, 12" High	EA	1
QSMS3001-18EXT	Mini-Split Super Stand Extender Kit, 2 systems, 18" High	EA	1
QSMS3001-24EXT	Mini-Split Super Stand Extender Kit, 2 systems, 24" High	EA	1

Mini-Split Dual Fan Stands

Our Quick-Sling® Mini-Split Dual Fan Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed whackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1202	Mini-Split Dual Fan Stand - 12", Powder Coated Steel	EA	1
QSMS1202-AL	Mini-Split Dual Fan Stand - 12", Unfinished Aluminum	EA	1
QSMS1202-PAL	Mini-Split Dual Fan Stand - 12", Powder Coated Aluminum	EA	1
QSMS1802	Mini-Split Dual Fan Stand - 18", Powder Coated Steel	EA	1
QSMS1802-AL	Mini-Split Dual Fan Stand - 18", Unfinished Aluminum	EA	1
QSMS1802-PAL	Mini-Split Dual Fan Stand - 18", Powder Coated Aluminum	EA	1
QSMS2402	Mini-Split Dual Fan Stand - 24", Powder Coated Steel	EA	1
QSMS2402-AL	Mini-Split Dual Fan Stand - 24", Unfinished Aluminum	EA	1
QSMS2402-PAL	Mini-Split Dual Fan Stand - 24", Powder Coated Aluminum	EA	1

Pitched Roof Mini-Split Mounting Bracket

The Quick-Sling® Pitched Roof Mini-Split Mounting Bracket is a fast and easy solution to mounting outdoor condensing units to a sloped roof.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSPR1000	Pitched Roof Bracket 300 lbs. capacity, 9° - 45° sloped roofs	EA	1

Mini-Split Double Stack Stand

Our Quick-Sling® Mini-Split Double Stack Stand provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed whackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1203	Mini-Split Double Stack Stand, Powder Coated Steel	EA	1
QSMS1203-N	Mini-Split Double Stack Stand - Narrow, Powder Coated Steel	EA	1
QSMS1203-N-AL	Mini-Split Double Stack Stand - Narrow, Unfinished Aluminum	EA	1
QSMS1203-N-PAL	Mini-Split Double Stack Stand - Narrow, Powder Coated Aluminum	EA	1

EQUIPMENT MOUNTING | EQUIPMENT STANDS

DUCTLESS MINI-SPLIT STANDS CONT'D

Heat Pump Stand

Our Quick-Sling® Heat Pump Stand provides a safe stable platform to mount your unit on. Keep it elevated above lawn mowers, weed whackers, pets, snow, and flooding. Elevated height allows for ease of installation, service, and maintenance.



QSTD3000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSTD3000	Quick Heat Pump Stand, 18" Tall	EA	1
QSTD3000-12	Quick Heat Pump Stand, 12" Tall	EA	1

3 Rail Large Mini-Split Stands

The large 3 Rail Mini-Split Stand is made extra wide to accommodate larger equipment with up to 38" wide mounting hole locations. This stand comes with 3 mounting rails.



QSMS1205
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1205	Mini-Split Stand - Extra Wide - 3 Rails, 12" Tall	EA	1
QSMS1805	Mini-Split Stand - Extra Wide - 3 Rails, 18" Tall	EA	1
QSMS2405	Mini-Split Stand - Extra Wide - 3 Rails, 24" Tall	EA	1

VRF STANDS

VRF/VRV Super Stand®

The New VRF/VRV Super Stand® Equipment Stands are now simpler to order, easier to size and compatible with more equipment model families.

- New sliding rail design allows infinite depth adjustments to fit most all VRF/VRV systems.
- New rail mounting slots align to all equipment mounting hole configurations.
- New Base and Extension models reduces number of model numbers making selecting and configuring the right stands quick and easy.



BASE
QSSB48-12



EXTENSION
QSSX48-12
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSSB48-12	Super Stand® Base Module, 12" High	EA	1
QSSB48-18	Super Stand® Base Module, 18" High	EA	1
QSSB48-24	Super Stand® Base Module, 24" High	EA	1
QSSX48-12	Super Stand® Extension Kit, 12" High	EA	1
QSSX48-18	Super Stand® Extension Kit, 18" High	EA	1
QSSX48-24	Super Stand® Extension Kit, 24" High	EA	1
QSSB62-12	Super Stand® Base Module, 12" High	EA	1
QSSB62-18	Super Stand® Base Module, 18" High	EA	1
QSSB62-24	Super Stand® Base Module, 24" High	EA	1
QSSX62-12	Super Stand® Extension Kit, 12" High	EA	1
QSSX62-18	Super Stand® Extension Kit, 18" High	EA	1
QSSX62-24	Super Stand® Extension Kit, 24" High	EA	1
QSSB74-12	Super Stand® Base Module, 12" High	EA	1
QSSB74-18	Super Stand® Base Module, 18" High	EA	1
QSSB74-24	Super Stand® Base Module, 24" High	EA	1
QSSX74-12	Super Stand® Extension Kit, 12" High	EA	1
QSSX74-18	Super Stand® Extension Kit, 18" High	EA	1
QSSX74-24	Super Stand® Extension Kit, 24" High	EA	1

EQUIPMENT STANDS | EQUIPMENT MOUNTING

AIR HANDLER STANDS

Vertical Air Handler Stand

Our Quick-Sling® Vertical Air Handler Stand fits all LG, Unico and Mitsubishi Air Handlers. It is adjustable left to right in 1" increments up to 6". 18" and 24" stands include 2 stability arms. 500 lbs. max. capacity.



QSTD4000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSTD4000	12" Vert Air Hdler Std 19" Arm	EA	1
QSTD4001	12" Vert Air Hdler Std 23" Arm	EA	1
QSTD4002	12" Vert Air Hdler Std 27" Arm	EA	1
QSTD5000	18" Vert Air Hdler Std 19" Arm	EA	1
QSTD5001	18" Vert Air Hdler Std 23" Arm	EA	1
QSTD5002	18" Vert Air Hdler Std 27" Arm	EA	1
QSTD6000	24" Vert Air Hdler Std 19" Arm	EA	1
QSTD6001	24" Vert Air Hdler Std 23" Arm	EA	1
QSTD6002	24" Vert Air Hdler Std 27" Arm	EA	1
QSTD-VRP2	24" Vert Air Hdler Std 27" Arm	EA	1

Horizontal Air Handler Stand

Our Quick-Stand is made of 14-gauge square tubing. This not only cuts down on vibration but allows the stand to hold up to 500 lbs. Each leg individually extends in 1" increments using thumb screws & wing nuts for speed and versatility. Installs as low as 22" on flat or uneven surfaces.



QSTD1000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSTD1000	Quick-Stand Heavy Duty	EA	1

Flexi Frame Equipment Stand

The galvanized steel Flexi Frame is a strong weather-resistant stand for mounting mini-splits & other equipment. The Flexi Frame can be configured with a base on multiple extensions to meet most application requirements.



FF-BF-B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FF-BF-B	Flexi Base Frame	EA	1
FF-EF-B	Flexi Extension Frame	EA	1
FF-BF-1500-B	Flexi Base Frame 1500	EA	1
FF-EF-1500-B	Flexi Extension Frame 1500	EA	1

BOILER AND WATER HEATER STANDS

Boiler/Water Heater Bracket

Newly redesigned mounting bracket for boilers and tankless water heaters. Available in wall mount or stand-alone configurations. Fits most boilers and tankless water heater designs. Bracket comes partially assembled for quick installations.



QSBB3000 QSBB4000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSBB3000	Boiler Bracket - Wall Mount, Fixed Horizontal Arm: 32", 350 lbs. capacity	EA	1
QSBB4000	Boiler Bracket - Free Standing, Fixed Horizontal Arm: 24", Adjustable Arm Height: 6" to 33", 350 lbs. capacity	EA	1

EQUIPMENT MOUNTING | EQUIPMENT STANDS

STAND ACCESSORIES

Quick-Sling® Accessories - Steel & Wood Beam Adapters



QSAC1000
QUICK-SLING®

- The QSAC1000 (set of 4) & 1100 (set of 2) steel beam adapters are made out of aluminum & able to hold up to 250 lbs each.
- Each QSAC1000 is slotted to receive 3/8" threaded rod or C - clamps for easy mounting.
- The QSAC2000 (set of 4) & 2100 (set of 2) wood beam adapters are made of steel & are 12" long & 2" wide.
- Each of our adapters are able to hold up to 200 lbs.
- They have a 1.5" bend that simply clips over the wood joist. All the necessary hardware is provided.
- QSAC1000 and QSAC2000 adapts: QSLG1000 & QSLG2000
- QSAC1100 and QSAC2100 adapts: QSWI1000 & QSWI2000

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSAC1000	Adapters, Steel Pk of 4	EA	1
QSAC1100	Adapters, Steel Pk of 2	EA	1
QSAC2000	Adapters, Wood Pk of 4	EA	1
QSAC2100	Adapters, Wood Pk of 2	EA	1

Anti-Vibration Feet

Anti-Vibration Feet: Quick-Sling® QSAC3000 kit is a set of 4 ea. 6 in. x 6 in. anti-vibration feet for QSMS and QSTD stands. This is an accessory kit that replaces the existing 6 in. x 6 in. feet on any QSMSxxxx or QSTDxxxx equipment stands. These anti-vibration feet provide 3 times more deflection than standard AV pads and can be used on any application where additional vibration isolation or noise reduction is needed.



QSAC3000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSAC3000	Anti-Vibration Feet	EA	1

Quick-Sling WeatherShield®

The Quick-Sling WeatherShield® protects outdoor ductless condensing units from weather damage. Quick-Sling WeatherShield® mounts directly to the mini-split and fits most sizes of equipment.



QSWS1000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWS1000	Quick-Sling WeatherShield® - 31.5" - 41.5" x 6" - 12"	EA	1

A/C Security Cages

These DiversiTech manufactured, weather-resistant, steel mesh guards offer a safe solution from theft, vandalism and accidental damage of your expensive air conditioning and air source heat pump. Ideal for all manufacturers of air conditioners and heat pumps.



CG-U-S

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CG-U-S	A/C Security Cage - Small, 27" x 41" x 23.6"	EA	1
CG-U-M	A/C Security Cage - Med., 45" x 41" x 23.6"	EA	1
CG-U-L	A/C Security Cage - Large, 63" x 41" x 23.6"	EA	1

12 x 12 Feet for MS Stands

The Quick-Sling® QSMSFT12 is a 4 pack of 12 in. x 12 in. feet for QSMS stands. These would typically be used on rooftop applications where larger feet are needed to replace the QSMS existing 6 in. x 6 in. feet.



QSMSFT12
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMSFT12	12" x12" Feet for MS Stands	PK	4

WALL BRACKETS | EQUIPMENT MOUNTING

CONDENSER WALL BRACKETS

Air Conditioner Brackets

These heavy duty 10ga thick steel AC brackets are perfect for hanging A/C condensers and heat pumps outside the home. Mount at any height to allow for easy maintenance under units. No need to wait for finished grade or landscaping prior to installation of AC unit. Pre punched holes for easy installation. Powder coated gray finish. Load rating 600 lbs. per pair.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACB-30	AC Mounting Bracket - 30", pack of 2	PK	1
ACB-36	AC Mounting Bracket - 36", pack of 2	PK	1
ACB-42	AC Mounting Bracket - 42", pack of 2	PK	1
ACB-48	AC Mounting Bracket - 48", pack of 2	PK	1
ACB-30-AL	AC Mounting Bracket, Aluminum - 30", pack of 2	PK	1
ACB-36-AL	AC Mounting Bracket, Aluminum - 36", pack of 2	PK	1
ACB-42-AL	AC Mounting Bracket, Aluminum - 42", pack of 2	PK	1
ACB-48-AL	AC Mounting Bracket, Aluminum - 48", pack of 2	PK	1

DUCTLESS MINI-SPLIT BRACKETS

Wall Brackets - Flat Wall

The QSWB1000 Condenser Wall Bracket provides a quick and safe mount that is perfectly designed for installation to a flat wall surface and can hold up to 500 lbs. It also has the flexibility to be installed in the up and out orientation or down and out.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB1000	Mini Split Wall Bracket	EA	1

Wall Bracket - Foundation Mount

This unique, 300 lb. condenser mounting bracket is designed to install directly to a foundation and still provides 7" clearance between the wall and the unit. The shelf depth is 19" and allows plenty of room for piping and service.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB3000	Wall Bracket w/Rails Heavy Duty	EA	1

Wall Brackets - Siding or Flat Wall

This condenser wall bracket combines the installation flexibility of the QSWB1000 and the slider track mounting rail of the QSWB2000 to create a Heavy Duty, versatile mounting solution.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB1100	Wall Bracket w/Rails Light Dty	EA	1

Wall Bracket - Siding or Flat Wall

These hurricane rated wall brackets are strong, easy to install and are designed to be mounted into framing studs at 12" or 16" on center. These fit most mini-split models on the market today and provides the required distance between the wall and the condenser for optimal air flow. The QSWB2000 is rated for 300 lbs. and the heavy duty QSWB4000 is rated for 600 lbs. Both models are also available in 316 stainless steel.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB2000	Wall Bracket w/Z Bend	EA	1
QSWB2000SS	Wall Bracket w/Z Bend, Stainless Steel	EA	1
QSWB2000-3	Wall Bracket w/Z Bend, 3 Mounting Arms	EA	1
QSWB2004	Wall Bracket - Extra Large	EA	1
QSWB2005	Wall Bracket - Extra Large, 3 Mounting Arms	EA	1
QSWB4000	Wall Bracket w/Z Bend, Heavy Duty	EA	1
QSWB4000SS	Wall Bracket w/Z Bend, Heavy Duty, Stainless Steel	EA	1

Hef-T-Bracket™

Used for supporting condensing units, Hef-T Brackets (Type 2) feature a cross bar that is attached to a wall, and two L shaped brackets that are hooked and bolted into place on the cross bar. The condensing unit is mounted onto the L shaped brackets, and fastened using the bolts and anti vibration washers provided. Hinged models help ensure unit can be easily leveled on any type of wall surface.



*Not approved for South Florida.

CATALOG NO.	DESCRIPTION	MATERIAL	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-A2S	Hef-T-Bracket™ - Sm.	Aluminum	16.6"	176 lbs.	EA	1
230-B2M	Hef-T-Bracket™ - Med. w/Top Hinge	Powder-Ctd. Steel	18"	250 lbs.	EA	1
230-B3M	Hef-T-Bracket™ - Med.	Powder-Ctd. Steel	18"	250 lbs.	EA	1
230-B2L	Hef-T-Bracket™ - Lg. w/Top Hinge	Powder-Ctd. Steel	21"	250 lbs.	EA	1
230-B3L	Hef-T-Bracket™ - Lg.	Powder-Ctd. Steel	21"	250 lbs.	EA	1
230-B2XL	Hef-T-Bracket™ - Ex. Lg.	Powder-Ctd. Steel	26"	250 lbs.	EA	1




EQUIPMENT MOUNTING | MOUNTING BLOCKS, FEET & RISERS

AIR HANDLER - FURNACE BLOCKS

Air Handler Block

Lightweight styrofoam block (white) provides A/C air handler support in attic installations.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-60	Air Handler Block 8" x 8" x 4" (White)	EA	144
7-64	Air Handler Block 8" x 8" x 4", pack of 4	PK	4

Furnace Mounting Blocks

Each furnace mounting block can support 40% more weight than competitive products – over 500 pounds! Easy peel and stick installation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FB-1	Furnace Mounting Block	EA	72

CONDENSER BLOCKS AND FEET

Base Pad

Used as a mounting base when condensing units must be bolted down. Maximum load capacity is 220 lbs. per pad. Sliding rail design for easy and fast installation. Includes mounting bolts. Available in 17" lengths. Ivory color.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-BP17W	17" Base Pad, pack of 2	PK	10

Hef-T-Block™

Used as mounting bases when condensing units must be bolted down. Available in three lengths. Furnished complete with end caps and mounting bolts. Maximum load capacity is 440 pounds per mounting block. Installation temperature range from -4°F (-20°C) to 140°F (60°C). Hef T Blocks fit all mini split condensing units with a unique sliding rail feature.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-MB14W	14" Hef-T-Block™ (White), pack of 2	PK	1
230-MB17W	17" Hef-T-Block™ (White), pack of 2	PK	1
230-MB36W	36" Hef-T-Block™ (White), pack of 2	PK	1
230-MBCW	Hef-T-Block™ Replacement End Cap (White), pack of 4	PK	25

H-Frame Kits

Ideal for supporting ducts, pipes and electrical equipment. Kits include a pair of feet, brackets and hardware. 12.6" or 19.7" square feet available.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
F-HF-320	H-Frame Kit - 12.5" foot	EA	1
F-HF-500	H-Frame Kit - 19.7" foot	EA	1


Hef-T-Foot™

The Hef-T-Foot™ is used to support small pipework, runs of cable tray, or an alternative to supporting condensing units, air source heat pumps or a variety of outdoor equipment. The Hef-T-Foot™ with strut comes in four lengths — 9.8", 15.7", 23.6", 39.4". They are manufactured from heavy duty recycled rubber and come complete with .8" x 1.6" galvanized steel strut adhered to the rubber with industrial adhesive. The rubber is strong and durable with drain slots moulded into the underside to allow standing water to flow under the foot.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FF-250-S	Hef-T-Foot™ – 9.8" with 1.6" x .8" strut	EA	1
FF-400-S	Hef-T-Foot™ – 15.7" with 1.6" x .8" strut	EA	1
FF-600-S	Hef-T-Foot™ – 23.6" with 1.6" x .8" strut	EA	1
FF-1000-S	Hef-T-Foot™ – 39.4" with 1.6" x .8" strut	EA	1
FF-250-UNI	Hef-T-Foot™ – 9.8" Universal	EA	1
FF-400-S-KIT	Mini-Split Installation Kit - 15.7"	EA	1
FF-450-S-KIT	Mini-Split Installation Kit - 17.7"	EA	1
FF-600-S-KIT	Mini-Split Installation Kit - 23.6"	EA	1
FF-1000-S-KIT	Mini-Split Installation Kit - 39.4"	EA	1

Hef-T-Foot™ Installation Variants

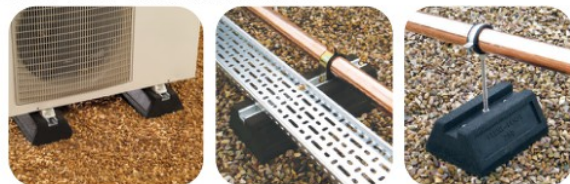

Mini-Split Installation Kit

Comes with 2 feet & Mounting Hardware



MNTG. BLOCKS, FT. & RISERS / HANGING BRKTS. | EQPT. MNTG.

HEAT PUMP RISERS

One Piece Heat Pump Risers

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one piece, heavy duty plastic unit is manufactured in three heights. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.



HPR-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HPR-3	Riser - 3"	EA	48
HPR-3BL	Riser - 3", Black	EA	48
HPR-6	Riser - 6"	EA	36
HPR-6BL	Riser - 6", Black	EA	36
HPR-12	Riser - 12"	EA	16

Two Piece Heat Pump Risers

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one piece, heavy duty plastic unit is manufactured in two heights and an extension. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.



HPR-6-2PG

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HPR-3-2P	Two Piece Riser - 3"	EA	32
HPR-6-2P	Two Piece Riser - 6"	EA	16
HPR-3-2PG	Two Piece Black Riser - 3"	EA	32
HPR-6-2PG	Two Piece Black Riser - 6"	EA	16
HPR-EXT	4" Extension	EA	28

Adjustable Equipment Risers

Adjustable equipment risers easily adjust up or down as needed to secure equipment at the correct height. The large center barrel twists up from starting height of 5" to a max of 8". A separate top cap allows for raising or lowering the riser even with equipment already on it. Convenient height markings provided for reference.



AER-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
AER-8	Adjustable Equipment Riser - 8"	EA	4
AER-8BL	Adjustable Equipment Riser - 8", Black	EA	4

UNIT HEATER SWIVEL BRACKETS

Quick Swivel Flush Mount w/ "H" Bracket - Unit Heater Bracket

Our Quick Swivel is made of 14-gauge steel able to hold 200 lbs. The swivel allows for 360° rotation for setting the perfect direction of air flow.



QSWI3000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWI3000	Swivel Flush H Bracket	EA	1
QSWI3001	Swivel Flush H Bracket 36" Spd	EA	1
QSWI3002	Swivel Flush H Bracket 17" Spd	EA	1
QSWI5003	Swivel Flush H Bracket Heavy Duty	EA	1

Quick Swivel "U" Mount - Unit Heater Bracket

Our Quick Swivel is made of 14-gauge steel able to hold 200 lbs. The swivel allows for 360° rotation for setting the perfect direction of air flow.



QSWI1000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWI1000	Swivel "U" Mount w/H-Bracket	EA	1
QSWI2000	Swivel "U" Mount w/I-Bracket	EA	1

Quick Swivel Flush Mount w/ "I" Bracket - Unit Heater Bracket

Our Quick Swivel is made of 14-gauge steel able to hold 200 lbs. The swivel allows for 360° rotation for setting the perfect direction of air flow.



QSWI4000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWI4000	Swivel Flush w/ I Bracket	EA	1
QSWI4001	Swivel Flush w/26" I Bracket	EA	1
QSWI5001	Swivel Flush w/34" I Bracket	EA	1
QSWI5002	Swivel Flush w/52" I Bracket	EA	1
QSWI6000	Swivel Flush w/2 I Brackets	EA	1

EQUIPMENT MOUNTING | HANGING BRACKETS / MTG. ACCESS.

AIR HANDLER HANGING BRACKETS

Ductless Cassette Hangers

The Ductless Cassette Hangers are an innovative bracket design that is made of light-weight aluminum to provide quick and easy installation of ductless cassettes. Only two skus are compatible with most of the ductless cassettes on the market today. The built-in adjustability allows the alignment of the unit after it has been hung.



QSCH1000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSCH1000	Ductless Cassette Hanger - Small Holds up to 200 lbs.	EA	1
QSCH2000	Ductless Cassette Hanger - Large Holds up to 200 lbs.	EA	1

Quick-Sling® - Air Handler Hanging Bracket

Our Quick-Sling is made of 14-gauge square tubing. This not only cuts down on vibration but allows the stand to hold up to 400 lbs. Extension arms individually adjust in one inch increments using thumb screws & wing nuts for speed & versatility. Installs as high as 24" or as low as 48" on flat or pitched roofs.



QSLG2000
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSLG2000	Sling Bracket Heavy Duty 2 Arm	EA	1

Air Handler, Light Duty

The Quick-Sling® QSLD1001 is a light duty horizontal air handler hanging system. It is designed to hang up to 250 lbs. of equipment on a flat or pitched roof. Extension arms adjust individually in one inch increments using thumb screws and wing nuts for speed and versatility.




QSLD1001
QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSLD1001	Air Handler, Light Duty	EA	1

ANTI-VIBRATION PADS

E.V.A. Anti-Vibration Pad

The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1! This is due to the special composite foam center which is much more structurally sound than cork. It is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. All this at a very competitive price. Designed to withstand 50 psi.



MP-4E

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MP-2E	2" x 2" x 7/8" E.V.A. Pad	EA	48
MP-3E	3" x 3" x 7/8" E.V.A. Pad	EA	36
MP-4E	4" x 4" x 7/8" E.V.A. Pad	EA	24
MP-6E	6" x 6" x 7/8" E.V.A. Pad	EA	24
MP-12E	12" x 12" x 7/8" E.V.A. Pad	EA	12
MP-18E	18" x 18" x 7/8" E.V.A. Pad	EA	6

Rubber Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 lbs. psi. The rubber pads are corrugated on both sides. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.




MP-3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MP-2	2" x 2" x 3/8" Rubber	EA	48
MP-3	3" x 3" x 3/8" Rubber	EA	36
MP-4	4" x 4" x 3/8" Rubber	EA	24
MP-6	6" x 6" x 3/8" Rubber	EA	24
MP-8	8" x 8" x 3/8" Rubber	EA	12
MP-12	12" x 12" x 3/8" Rubber	EA	12
MP-18	18" x 18" x 3/8" Rubber	EA	6

Rubber/Cork Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides. The cork is laminated between two corrugated pads. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.



MP-4C

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MP-2C	2" x 2" x 7/8" Rubber/Cork	EA	48
MP-3C	3" x 3" x 7/8" Rubber/Cork	EA	36
MP-4C	4" x 4" x 7/8" Rubber/Cork	EA	24
MP-6C	6" x 6" x 7/8" Rubber/Cork	EA	24
MP-12C	12" x 12" x 7/8" Rubber/Cork	EA	12
MP-18C	18" x 18" x 7/8" Rubber/Cork	EA	6

Iso-Cube Economy Anti-Vibration Pad

Natural rubber pads, designed to reduce vibration and noise emanating from refrigeration and air conditioning equipment. The circular design in each pad offers a suction cup effect, which eliminates the need to bolt the pads down. A standard 18" (46cm) pad is divided into eighty-one 2" (5cm) segments, each of which may be cut or torn to provide smaller pads. These 50 durometer pads will withstand a load of 180 psi with greater resiliency.



ISO-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ISO-2	2" x 2" x 3/4" Iso-Cube	EA	24
ISO-4	4" x 4" x 3/4" Iso-Cube	EA	12
ISO-18	18" x 18" x 3/4" Iso-Cube	EA	6

MOUNTING ACCESSORIES | EQUIPMENT MOUNTING

TIE-DOWN CLIPS

The Hurricane Pad™ Tie Down Clips

Brackets used to secure condensing units to a pad or stand. These Florida approved clips use #8 self-tapping or self-drilling screws to secure to condenser. Florida Product Approved for use in Hurricane Zones.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TDC-4	The Hurricane Pad™ Attachment Bracket - 4", pack of 4	PK	1
TDC-4-100	The Hurricane Pad™ Attachment Bracket - 4", pack of 100	PK	1
TDC-6	The Hurricane Pad™ Attachment Bracket - 6", pack of 4	PK	1
TDC-8	The Hurricane Pad™ Attachment Bracket - 8", pack of 4	PK	1
TDC-10	The Hurricane Pad™ Attachment Bracket - 10", pack of 4	PK	1
TDC-12	The Hurricane Pad™ Attachment Bracket - 12", pack of 4	PK	1



VIBRATION ISOLATION STRIPS

Vibration Isolation Strips for Mini-Split & VRF/VRV

These high-density elastometric-coated, molded and pre-compressed fiberglass strips are UV resistant and designed to provide vibration isolation and allow controlled movement in the fiber media.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSAC5100	Mini-Split Vibration Isolation Strips - "00" for narrow mini-split stands	EA	1
QSAC5101	Mini-Split Vibration Isolation Strips - "01" for standard mini-split stands	EA	1
QSAC5102	Mini-Split Vibration Isolation Strips - "02" for two fan mini-split stands	EA	1
QSAC5104	Mini-Split Vibration Isolation Strips - "04" for 2-arm large mini-split stands	EA	1
QSAC5105	Mini-Split Vibration Isolation Strips - "05" for 3-arm large mini-split stands	EA	1
QSAC5200	Super Stand® Vibration Isolation Strips - 48 in.	EA	1
QSAC5201	Super Stand® Vibration Isolation Strips - 62 in.	EA	1
QSAC5202	Super Stand® Vibration Isolation Strips - 74 in.	EA	1

RAIN AND SNOW SHIELDS

Roof Bracket

The Quick-Sling® Roof Bracket mounts to QSWB3000 or the QSMS1200, 1201, 1202, 1800, 1801, 1802, 2400, 2401 and protects the equipment from snow and freezing rain.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSRB1000	Roof Bracket	EA	1

EQUIPMENT MOUNTING | MOUNTING ACCESSORIES

STRUT CLIPS & CLAMPS

Studded Clips

Studded Clips fit directly onto 5/16" (M8) or 3/8" (M10) size threaded rods. No tool required to install. Use for refrigeration, A/C tubing, PEX piping, conduit, and cabling support. The clips are UL2043 compliant and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. Available in 11 sizes to fit pipes with 5/8" to 2-1/8" outer diameter.



CATALOG NO.	ROD SIZE	TUBE O.D. (IN.)	UOM	ORDER MUL.
SC08-15	5/16"	5/8"	10 Pack	1
SC08-20	5/16"	3/4"	10 Pack	1
SC08-22	5/16"	7/8"	10 Pack	1
SC08-25	5/16"	1"	10 Pack	1
SC08-28	5/16"	1-1/8"	10 Pack	1
SC08-32	5/16"	1-1/4"	10 Pack	1
SC08-35	5/16"	1-3/8"	10 Pack	1
SC08-40	5/16"	1-1/2"	10 Pack	1
SC08-42	5/16"	1-5/8"	10 Pack	1
SC08-50	5/16"	2"	10 Pack	1
SC08-54	5/16"	2-1/8"	10 Pack	1
SC10-15	3/8"	5/8"	10 Pack	1
SC10-20	3/8"	3/4"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

CATALOG NO.	ROD SIZE	TUBE O.D. (inch)	UOM	ORDER MUL.
SC10-25	3/8"	1"	10 Pack	1
SC10-28	3/8"	1-1/8"	10 Pack	1
SC10-32	3/8"	1-1/4"	10 Pack	1
SC10-35	3/8"	1-3/8"	10 Pack	1
SC10-40	3/8"	1-1/2"	10 Pack	1
SC10-42	3/8"	1-5/8"	10 Pack	1
SC10-50	3/8"	2"	10 Pack	1
SC10-54	3/8"	2-1/8"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

InsulClips

InsulClips fit directly into vertical and horizontal standard 1-5/8" strut channels. No tool required to install. Use for refrigeration, A/C tubing, PEX piping, conduit and cabling support. They are ideal for insulated pipes, to maintain vapor seal of the insulation and eliminates sweating. The clips are UL2043 compliant and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. Available in 11 sizes to fit pipes with 5/8" to 2-1/8" outer diameter.



CATALOG NO.	TUBE O.D. (IN.)	UOM	ORDER MUL.
IC00-15	5/8"	10 Pack	1
IC00-20	3/4"	10 Pack	1
IC00-22	7/8"	10 Pack	1
IC00-25	1"	10 Pack	1
IC00-28	1-1/8"	10 Pack	1
IC00-32	1-1/4"	10 Pack	1
IC00-35	1-3/8"	10 Pack	1
IC00-40	1-1/2"	10 Pack	1
IC00-42	1-5/8"	10 Pack	1
IC00-50	2"	10 Pack	1
IC00-54	2-1/8"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

Cable Tie Channel Clips

Cable Tie Channel Clips fit directly into vertical and horizontal standard 1-5/8" strut channels. No tool required to install. Use for refrigeration, A/C tubing, PEX piping, conduit and cabling support. The clips are compliant with UL2043 and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. They accommodate PVC or metal cable ties up to a width of 11/16" (17mm). Three support base lengths available in 2" (50mm), 2-1/2" (65mm) and 3" (80mm).



CATALOG NO.	LENGTH	UOM	ORDER MUL.
CTC-050	2"	10 Pack	1
CTC-065	2-1/2"	10 Pack	1
CTC-080	3"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

Rigid Strut Clamp

Extra durable Zinc Electroplate Finished Strut Clamps to secure rigid and IMC conduits and pipes to struts. The Clamps with 2-1/2" through 8" diameter are suitable for rigid and EMT conduits.



CATALOG NO.	PINCH SIZE (IN.)	O.D. (IN.)	DESIGN LOAD (LBS.)	UOM	ORDER MUL.
17515	3/4"	1.050"	600	EA	100
17516	1"	1.315"	600	EA	100
17518	1-1/2"	1.900"	800	EA	50
17519	2"	2.375"	800	EA	50
17520	2-1/2"	2.875"	800	EA	50
17521	3"	3.500"	800	EA	25
17522	3-1/2"	4.000"	1000	EA	25
17523	4"	4.500"	1000	EA	25

MOUNTING ACCESSORIES | EQUIPMENT MOUNTING

STRUT CLIPS & CLAMPS CONT'D

Flat Surface Adapter

The new Flat Surface Adapter is designed as a mounting base for RPC Clips, InsulClips, and Cable Tie Channel Clips. It easily screws onto any flat surface to provide a secure base for mounting. Made of a strong and lightweight polyamide (nylon) material.

- UL2043 compliant
- Includes slots for cable ties
- Fast and easy to install as a mounting base



RPC-FB

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RPC-FB	RPC Flat Surface Adapter	10 Pack	1
RPC-FB-100	RPC Flat Surface Adapter	10 Pack	1

Universal Strut Clamp

A highly versatile Universal Strut Clamp. Fits both pipe (rigid conduit)/IMC and thin walled tubing (EMT) in the corresponding sizes. Secures conduit to strut. Zinc Electro-Plate Finish.



17532

CATALOG NO.	PINCH SIZE (IN.)	O.D. (IN.)	DESIGN LOAD (LBS.)	UOM	ORDER MUL.
17532	1/2"	0.773"	400	EA	100
17533	3/4"	0.986"	600	EA	100
17534	1"	1.239"	600	EA	100
17535	1-1/4"	1.585"	600	EA	50
17536	1-1/2"	1.820"	800	EA	50
17537	2"	2.286"	800	EA	50

Cushion Clamps

An industry standard universal clamp that mounts to standard strut. Steel with electrochromate finish to resist corrosion. The lock nut has a nylon insert for a positive lock. The polymeric grommet withstands temperatures from -25°C TO 125°C and resists the effects of most oils, chemicals, and industrial cleaning compounds.



538-1/4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
538-1/4	Clamp Cushion - 1/4"	PK	25
538-3/8	Clamp Cushion - 3/8"	PK	25
538-1/2	Clamp Cushion - 1/2"	PK	25
538-5/8	Clamp Cushion - 5/8"	PK	25
538-3/4	Clamp Cushion - 3/4"	PK	25
538-7/8	Clamp Cushion - 7/8"	PK	25
538-1-1/8	Clamp Cushion - 1-1/8"	PK	10
538-1-3/8	Clamp Cushion - 1-3/8"	PK	10
538-1-5/8	Clamp Cushion - 1-5/8"	PK	10
538-2-1/8	Clamp Cushion - 2-1/8"	PK	10
538-2-5/8	Clamp Cushion - 2-5/8"	PK	10
538-3-1/8	Clamp Cushion - 3-1/8"	CS	40
538-4-1/8	Clamp Cushion - 4-1/8"	PK	10

Rapid Positioning Clips

Rapid Positioning Clips fit directly into vertical and horizontal standard 1-5/8" strut channels. No tool required to install. Use for refrigeration, A/C tubing, PEX piping, and conduit support. They prevent cracked and fractured joints by allowing secured pipe to expand. The clips are UL2043 compliant and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. Available in 9 sizes to fit pipes with 1/4" to 1-5/8" outer diameter.



CATALOG NO.	TUBE O.D. (IN.)	UOM	ORDER MUL.
RPC-0014	1/4"	10 Pack	1
RPC-0038	3/8"	10 Pack	1
RPC-0012	1/2"	10 Pack	1
RPC-0058	5/8"	10 Pack	1
RPC-0034	3/4"	10 Pack	1
RPC-0078	7/8"	10 Pack	1
RPC-0118	1-1/8"	10 Pack	1
RPC-0138	1-3/8"	10 Pack	1
RPC-0158	1-5/8"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

EMT Strut Clamp

Zinc Electroplate Finished Strut Clamps to secure EMT conduits and pipes to struts.



17542

CATALOG NO.	PINCH SIZE (IN.)	O.D. (IN.)	DESIGN LOAD (LBS.)	UOM	ORDER MULTIPLE
17542	1/2"	0.706"	400	EA	100
17543	3/4"	0.922"	400	EA	100
17544	1"	1.163"	600	EA	100
17545	1-1/4"	1.510"	600	EA	50
17546	1-1/2"	1.740"	800	EA	50
17547	2"	2.197"	800	EA	50

Channel Post Base for 1-5/8" Strut Channels

A Post Base secures a strut assembly to the floor or other surfaces. These Post Bases are made of galvanized steel and are available as 2 and 4 hole, heavy-duty, mounting option.



17452

CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MUL.
17450	Post Base 2 Hole	4" x 6"	EA	5
17452	Post Base 4 Hole, Corner Orientation	6" x 6"	EA	5
17454	Post Base 4 Hole, Side Orientation	6" x 6"	EA	5

EQUIPMENT MOUNTING | MOUNTING ACCESSORIES

STRUT CLIPS & CLAMPS CONT'D

Channel Nuts

Spring Channel Nuts to attach a threaded rod to a strut. They are available with short springs for 13/16" & 1" channels and with regular springs for 1-3/8" & 1-5/8" channels. Zinc Electroplate finished.



17430

CATALOG NO.	DESCRIPTION	THREAD	THICKNESS	UOM	QM
17412	Channel Nut-Short Spring	1/4" - 20"	.25"	EA	100
17438	Channel Nut-Regular Spring	3/8" - 16"	.37"	EA	100
17442	Channel Nut-Regular Spring	1/2" - 13"	.50"	EA	100

Strut to Beam Clamps

These clamps connect a beam to a strut installation. They are designed for a load up to 1200 lbs. when used in pairs. Zinc Electroplate Finish.



17462

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
17462	Beam Clamp for 13/16" & 1-5/8" Channel	EA	25
17464	Beam Clamp for 2-7/16" & 3-1/4" Channel	EA	25

Spring Steel Beam Clamp

This fast-installing Beam Clamp fits beam flanges up to 1/2". It can be used with 1/4" and 3/8" threaded rod, "S" hooks, conduit hangers, electrical boxes, and #10-24 or 1/4"-20 bridle rings.



18016

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18016	Spring Steel Beam Clamp, 1/2 in.	EA	100

Flange Mount Conduit Assembly - Bottom Mount

The Assembly suspends a conduit from the bottom of a beam with a Posi-Lock mechanism. It installs with a hammer only and can pivot 360°. The rated static load limit is 75 lbs.



18200

CATALOG NO.	DESCRIPTION	FLANGE THICKNESS	FITS CONDUIT	UOM	ORDER MUL.
18200	Flange Mount Conduit Assembly - Bottom Mount - Posi-Lock	1/8"-1/4"	3/8"	EA	100
18050	Flange Mount Conduit Assembly - Bottom Mount - Posi-Lock	1/8"-1/4"	1/2" - 3/4"	EA	100
18202	Flange Mount Conduit Assembly - Bottom Mount - Posi-Lock	1/8"-1/4"	1	EA	100

Connection Plates for 1-5/8" Strut Channels

Connection Plates are used to connect strut channels to each other. Splice plates allow to make extensions by connecting several channels while corner and angle plates make 90° connections. All plates are manufactured of steel with Zinc Electroplate finish, are 1/4" thick, and designed to be used with 1-5/8" strut channels.



17626

17636

17634

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
17618	Square Washer 1/2"	EA	100
17628	2 Hole Corner Angle	EA	50
17630	2 Hole Cross Corner Angle	EA	50
17632	3 Hole Corner Plate	EA	25
17633	3 Hole Cross Corner Angle	EA	50
17634	4 Hole 3 Way Corner Angle	EA	25
17638	2 Hole Open 45° Corner Angle	EA	25

Plastic White End Caps

Plastic White End Caps are used to cover the ends of a strut channel. Made of soft PVC material they provide a safe, smooth capping.



17682

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
17684	Plastic White End Caps for 1-5/8" Channel	EA	100

Spring Steel Beam Clamps

Spring Steel Clamps allow to suspend boxes, fixtures and bridle rings to 1/8" through 3/4" beam flanges.



18123

18018

CATALOG NO.	DESCRIPTION	FLANGE THICKNESS	STATIC LOAD	UOM	ORDER MULTIPLE
18123	Spring Steel Beam Clamps 1/8" to 1/4" 1/4"-20 x 3/8" Stud	1/8" to 1/4"	75 Lbs	EA	100
18124	Spring Steel Beam Clamps 5/16" to 1/2" 1/4"-20 x 3/8" Stud	5/16" to 1/2"	75 Lbs	EA	100
18018	Spring Steel Beam Clamps 1/8" to 1/4" Universal	1/8" to 1/4"	200 Lbs	EA	100

Spring Steel Cable Clips

The Cable Clip for MC, AC, or BX support 14-2, 14-3 & 12-2 cables in horizontal or vertical position.

NOTE: The product is designed for positioning only, with no load rating.



18026

CATALOG NO.	DESCRIPTION	FOR USE WITH	UOM	ORDER MUL.
18026	Spring Steel Cable Clips	OD's from .433 to .535	EA	100

MOUNTING ACCESSORIES | EQUIPMENT MOUNTING

STRUT CLIPS & CLAMPS CONT'D

Flange Mount Conduit Assembly - Side Mount

The Assembly suspends a conduit from the side of a beam with a Posi-Lock mechanism. It installs with a hammer only and can pivot 360°. The rated static load limit is 25 lbs.



18231

CATALOG NO.	DESCRIPTION	FLANGE THICKNESS	FITS CONDUIT	UOM	ORDER MUL.
18231	Flange Mount Conduit Assembly - Side Mount - Posi-Lock	1/8"-1/4"	1/2" - 3/4"	EA	100
18232	Flange Mount Conduit Assembly - Side Mount - Posi-Lock	1/8"-1/4"	1"	EA	100
18240	Flange Mount Conduit Assembly - Side Mount - Posi-Lock	5/16"-1/2"	1/2" - 3/4"	EA	100

Beam Clamp to Conduit Hanger Assembly

The Spring Steel Beam Clamp with a Pre-Installed Posi-Lock conduit hanger is available for bottom and side mount of conduits. The rated static load is 100 lbs. for the vertical, and 25 lbs. for the horizontal installation.



18130

CATALOG NO.	DESCRIPTION	FOR USE WITH	UOM	ORDER MUL.
18130	Bottom Mount	1/2"-3/4"	EA	100
18140	Side Mount	1/2"-3/4"	EA	100

Bridle Rings

Zinc-Plated Bridle Rings are a good support for communication cables & other low voltage uses. They are available as Bolt-On, commonly used with Beam Clamps, and as Screw-In, commonly used with Wooden Beams. The Cable Support Bridle Rings with saddle are a cost-effective alternative to expensive cable tray. Their wide surface saddle provides support without stress for Category 5, fiber-optic, and other sensitive voice/Datacom cables.



18422



18058

CATALOG NO.	DESCRIPTION	RING DIAMETER	THREAD	UOM	ORDER MUL.
18421	Bridle Rings - Bolt-On	1/4" - 20"	1/4"-20	EA	100
18422	Bridle Rings - Bolt-On	2"	1/4"-20	EA	100
18425	Bridle Rings - Screw-On	1"	3/16"	EA	100
18426	Bridle Rings - Screw-On	1-1/2"	1/4"	EA	100
18427	Bridle Rings - Screw-On	2"	1/4"	EA	100
18058	Bridle Rings - Bolt-On with Saddle	2"	1/4"-20	EA	50
18060	Bridle Rings - Bolt-On with Saddle	4"	1/4"-20	EA	50

Z Purlin Hanger

Z Purlin Angled Flange Hangers are used to attach threaded rod or hooks and straps to an angled Z purlin. The Hangers are holding up to 100 lbs.



18180

18160

CATALOG NO.	DESCRIPTION	FOR USE WITH	UOM	ORDER MUL.
18180	Z Purlin Flange Hanger	Flange from 1/16" to 1/4"	EA	100
18160	Z Purlin Rod Hanger Assembly	1/4" Threaded Rod	EA	100
18161	Z Purlin Rod Hanger Assembly	3/8" Threaded Rod	EA	100

J-Hooks

2" J Hooks for Datacom applications are a cost-effective alternative to expensive cable tray. Their wide base provides support without stress for Cat5, fiber-optic and other sensitive voice/Datacom cables. The continuous wide base radius supports the natural curve of cables and ensures eliminating kinks & bending. A cable wire retainer is supplied with every part. Its unique design eliminates the need for an attachment plate when stacked. These J-Hooks can be attached to a wide variety of structures using beam clamps, clips and many other components.



18056

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18056	J Hooks - 2", Screw Mount	EA	25

Box To T-Bar Fastener

A Snap-On 24" span box hanger with dual height adjustment that allows flush or 3/4" offset mounting of boxes. It is produced of pre-galvanized steel with spring steel hardware and has 1 BBC mounting clip with screw included.



18054

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18054	24" Span Box to T-Bar Fastener	EA	100

Box Stabilizer Support

This Stabilizer for electrical boxes is made of pre-galvanized steel. The box support is designed to be screwed to 2-1/2", 3-1/2" & 4" wood or metal studs.



18370

CATALOG NO.	STUD SIZE	UOM	ORDER MUL.
18370	2-1/2", 3-1/2"	EA	100
18052	2-1/2", 3-1/2", 4"	EA	100

EQUIPMENT MOUNTING | MOUNTING ACCESSORIES

STRUT CLIPS & CLAMPS CONT'D

T-Bar Scissor Clips

This 2-piece T-Bar Scissor Clip mounts fixtures or boxes to a 1" T-bar. Includes a wing nut washer. Static Load Limit of 100 lbs.



18387

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18387	24" Span Box to T-Bar Fastener	EA	50

BX 1 Hole Strap

These one-hole pipe straps are ideal for hanging tubing, pipe, conduit and BX cable. They are made of pre-galvanized zinc plated steel with a reinforced rib for extra strength.



19463

CATALOG NO.	CABLE SIZE	UOM	ORDER MUL.
19463	BX: 14 - 2 Thru 10 - 3	EA	100

2 Hole PVC Pipe Straps

Designed to accommodate Schedule 40 PVC Conduit. The Heavy-Duty Poly-thene material resists deterioration from UV rays and breakage from extreme cold.



19490

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19490	1/2"	EA	100
19492	3/4"	EA	100
19494	1"	EA	100
19496	1-1/4"	EA	50
19498	1-1/2"	EA	50
19500	2"	EA	50
19501	2-1/2"	EA	25
19502	3"	EA	25
19503	4"	EA	25

1 Hole Rigid Pipe Straps - Heavy Duty - Steel

The 1 Hole Rigid Pipe Strap is made of zinc plated steel with a reinforced hole and rib for heavy duty applications. It can be easily Snap-On installed and is used to secure Rigid & IMC conduit.



19426

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19426	1"	EA	25

2 Hole Rigid Pipe Straps - Steel

The 2 Hole Rigid Zinc Plated Steel Pipe Straps with reinforced holes and rib for extra strength are used to secure Rigid & IMC conduit. Easy Snap-On installation.



19438

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19443	3"	EA	1
19444	4"	EA	1
19446	6"	EA	1

1 Hole EMT Pipe Straps - Steel

Zinc Plated Steel Pipe Straps with a reinforced hole and rib for extra strength to secure EMT conduits. Easy Snap-On installation.



19400

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19400	1/2"	EA	100
19401	3/4"	EA	100
19402	1"	EA	100

CONDENSATE MANAGEMENT



CONDENSATE PUMPS

Tank Pumps	23-24
Ductless Mini-Split Pumps	24

CONDENSATE SWITCHES

Flood Switches	25
Inline Switches	25
Primary Drain Pan Switches	26
Secondary Drain Pan Switches	26

CONDENSATE DRAIN PANS

Plastic Drain Pans	27
Metal Drain Pans	27
High Rise Drain Pans	28
Furnace Pans	28
Water Heater Pans	29
Specialty Drain Pans	29

CONDENSATE TREATMENTS

Pan Treatments	30
Neutralization	30-31

INSTALLATION ACCESSORIES

Braided Vinyl Tubing	31
Clear Vinyl Tubing	32
Polyethylene Tubing	32
PVC Pipe	33
PVC Fittings	33-36
Pipe Cements, Primers, and Cleaners	36-38
Nylon Fittings	38-39
Drain Traps and Kits	39-40
Ductless Drain Line Tubing and Fittings	40



Providing best-in-class HVAC/R service and support is what you do, and relying on dependable product solutions is critical to getting the job done right — and to your customer’s satisfaction.

Meet Asurity® — a DiversiTech® brand of condensate management products that provide a complete system of pumps, switches, drain pans, and treatments supported by highly trained technical support when you need it. At Asurity, we do more than create complete system solutions, we create peace of mind.



YOUR COMPLETE SYSTEM FOR
CONDENSATE MANAGEMENT



Condensate Pumps



Switches



Drain Pans



Treatments



NOTE: Item numbers in **RED** indicate Made in the U.S.A.

diversitech.com

CONDENSATE MANAGEMENT | CONDENSATE PUMPS

TANK PUMPS

ULTRACP-22

- Translucent Tank for Easy & Fast Inspection
- Removable Check Valve for Easy Cleaning
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- 60 Hz, 22' Lift



ULTRACP-22
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ULTRACP-22	Condensate Pump Ultra, 120 VAC	EA	6
ULTRACP-22-230	Condensate Pump Ultra, 230 VAC	EA	6

ULTRACP-22T

- Includes 20' Clear Vinyl 3/8" Tubing
- Translucent Tank for Easy & Fast Inspection
- Removable Check Valve for Easy Cleaning
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- 60 Hz, 22' Lift



ULTRACP-22T
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ULTRACP-22T	Condensate Pump Ultra, 120 VAC	EA	6
ULTRACP-22T-230	Condensate Pump Ultra, 230 VAC	EA	6

IQP-120

- Translucent Tank for Easy & Fast Inspection
- Variable Speed for Quieter Operation
- Senses Clog & Engages Pulse Mode for Cleaning
- Built-In Safety Overflow Switch with Alarm & Run Contacts
- LED Indicators & Audible Alarm Confirm Pump Status
- Floatless Sensor Technology
- 60 Hz, 22' Lift



IQP-120
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IQP-120	Condensate Pump Specialty, 120VAC	EA	6

IQP-120T

- Includes 20' Clear Vinyl 3/8" Tubing
- Translucent Tank for Easy & Fast Inspection
- Variable Speed for Quieter Operation
- Senses Clog & Engages Pulse Mode for Cleaning
- Built-In Safety Overflow Switch with Alarm & Run Contacts
- LED Indicators & Audible Alarm Confirm Pump Status
- Floatless Sensor Technology
- 60 Hz, 22' Lift



IQP-120T
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IQP-120T	Condensate Pump Specialty, 120VAC	EA	6

CP-22LP

- Reduced Height for Restricted Spaces
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



CP-22LP
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-22LP	Condensate Pump Specialty, 120 VAC	EA	6
CP-22LP-230	Condensate Pump Specialty, 230 VAC	EA	6

CP-22LP-P

- Reduced Height for Restricted Spaces
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



CP-22LP-P
Plenum Rated
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-22LP-P	Condensate Pump Specialty, 120 VAC	EA	6
CP-22LP-230-P	Condensate Pump Specialty, 230 VAC	EA	6

PROCP-16

- Handles Condensate up to 160° F
- Sturdy Metal Hang Tabs
- 60 Hz, 16' Lift



PROCP-16
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-16	Condensate Pump Pro, 120 VAC	EA	6
PROCP-16	Condensate Pump Pro, 230 VAC	EA	6

PROCP-22S

- Handles Condensate up to 160° F
- Built-in Safety Overflow Switch
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



PROCP-22S
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-22S	Condensate Pump Pro, 120 VAC	EA	6
PROCP-22S-230	Condensate Pump Pro, 230 VAC	EA	6

CONDENSATE PUMPS | CONDENSATE MANAGEMENT

TANK PUMPS CONT'D

PROCP-22ST

- Includes 20' Clear Vinyl 3/8" Tubing
- Handles Condensate up to 160° F
- Built-in Safety Overflow Switch
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



PROCP-22ST
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-22ST	Condensate Pump Pro, 120 VAC	EA	6
PROCP-22ST-230	Condensate Pump Pro, 230 VAC	EA	6

CP-CV

Check valve installs easily and prevents water from travelling backwards into the pump and overflowing.



CP-CV

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-CV	Replacement Check Valve for CP-22 and PROCP Models	EA	1

PROCP-46

- Handles Acidic and Non-Acidic Condensate up to 212°F
- Large 1-Gallon Tank Instantly Reduces Temperature of Boiler & Steam Humidifier Discharge
- Flow Rate up to 190 Gallons Per Hour
- Quarter-Turn Removable Check Valve
- Built-In Safety Overflow Switch
- 60 Hz, 49' Lift



PROCP-46
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-46	Condensate Pump Pro, 120 VAC	EA	6
PROCP-46-230	Condensate Pump Pro, 230 VAC	EA	6

DUCTLESS MINI-SPLIT PUMPS

CP-M

- Quiet Operation (20.2 Decibels)
- Suction Lift 6.5'
- For Equipment up to 36K BTU/h
- Built-in Safety Overflow Switch with Alarm & Run Contacts
- For Wall Mounts & Ceiling Cassettes
- Includes Installation Accessories
- 60 Hz, 24' Lift



CP-M115
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-M115	Condensate Pump Ductless, 115 VAC	EA	10
CP-M230	Condensate Pump Ductless, 230 VAC	EA	10

QUIETMINI-I

- Ultra Quiet Piston Pump, (19 dBA)
- Compact Design for Mini-Splits
- Built-In Safety Overflow Switch
- Easy Installation & Maintenance
- Anti-Vibration Mounts
- Built-In Check Valve Preventing Backflow
- Max Output 24,000 BTU/h, 7 kW
- Max Unit Output 54,000 BTU/h, 16kW
- 60 Hz, 26' Lift



QUIETMINI-I
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QUIETMINI-I	Condensate Pump Ductless, 115-230 VAC	EA	10

CVMINI

- Variable Speed for Silent Operation (19.0 Decibels)
- Suction Lift 6.5'
- For Equipment up to 120K BTU/h
- Built-in Safety Overflow Switch with Alarm & Run Contacts
- LED Indicators Confirm Pump Status
- Includes Installation Accessories
- Floatless Sensor Technology
- 60 Hz, 35' Lift



CVMINI
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CVMINI	Condensate Pump Ductless, 120-240 VAC	EA	6

QUIETMINI-M

- Undermount Pump for Ductless System
- Ultra Quiet (21dBA)
- Removable Reservoir for Easy Maintenance
- Built-in Safety Overflow Switch
- Max Unit Output 54,000 BTU/h, 16kW
- 60 Hz, 26' Lift



QUIETMINI-M
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QUIETMINI-M	Condensate Pump Ductless, 115-230 VAC	EA	10

CONDENSATE MANAGEMENT | CONDENSATE SWITCHES

FLOOD SWITCHES

Wet Switch® Flood Detector

- Turns Off with as Few as 1-2 Drops of Water Detection
- LED Indicators
- Connect Multiple Switches to Expand Protection Area



WS-1

Plenum Rated



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WS-1	Wet Switch Flood Detector	EA	1

Wet Switch® Dual Voltage Flood Detector

- Turns Off with as Few as 1-2 Drops of Water Detection
- LED Indicators
- Connect Multiple Switches to Expand Protection Area
- Flexible Placement Options
- 12 Volt: Integrates into Building Automation Systems and Transmits Alarm Signal with as Few as 1-2 Drops of Water Detection
- 24 Volt: Works with All HVAC Systems



WS-2DV

Plenum Rated



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WS-2DV	Dual Voltage Flood Detector	EA	1

INLINE SWITCHES

CS-1 Condensate Safety Overflow Switch

- LED Illuminates When Condensate Line is Blocked
- Built-In Protection Against Power Surges Provides Increased Reliability
- Three Installation Configurations for Increased Flexibility
- For Standard & Plenum Rated Installations in Primary or Auxiliary Lines



CS-1

Plenum Rated



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS-1	Condensate Safety Overflow Switch	EA	10
CS-1-BULK50	Condensate Safety Overflow Switch	EA	50

CS-2 Condensate Safety Overflow Switch

- LED Illuminates When Condensate Line is Blocked
- Built-In Protection Against Power Surges Provides Increased Reliability
- For Standard & Plenum Rated Installations in Auxiliary Lines



CS-2

Plenum Rated



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS-2	Condensate Safety Overflow Switch	EA	10
CS-2-BULK50	Condensate Safety Overflow Switch	EA	50

SOS-1 Condensate Safety Overflow Switch

- Fits Over 3/4" Standard Plastic Pipe without Cutting Drain Line
- Float Free Design, Ideal for Drier Environments
- Switch Orientation Adjusts Sensitivity
- Includes Easy to Attach Primary Drain Pan Fitting
- For Standard Rated Installations in Primary or Auxiliary Lines



SOS-1



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SOS-1	Condensate Safety Overflow Switch	EA	12

CONDENSATE SWITCHES | CONDENSATE MANAGEMENT

PRIMARY DRAIN PAN SWITCHES

CS-3 Condensate Safety Overflow Switch

- Adjustable Activation Height
- Position Anywhere Along the Drain Pan
- For Standard Rated Installations in Primary or Secondary Drain Pans



CS-3

Plenum Rated



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS-3	Condensate Safety Overflow Switch	EA	10
CS-3-BULK50	Condensate Safety Overflow Switch Bulk Pack of 50	EA	50

BG 301+ Condensate Safety Overflow Switch

- Prevents Short Cycling that Can Lead to Equipment Damage
- Less Intermittent or False Tripping
- Float Latches When Tripped
- Checks and Measures Water Levels
- 2 Adapters Included



BG-301+



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BG-301+	Condensate Safety Overflow Switch	EA	30
BG-301+T	Condensate Safety Overflow Switch with Trane Adapter	EA	30
BG-302P+T	Condensate Safety Overflow Switch with Trane Adapter Plenum Rated	EA	30

SECONDARY DRAIN PAN SWITCHES

BG-101 Condensate Safety Overflow Switch

- Prevents Short Cycling that Can Lead to Equipment Damage
- Less Intermittent or False Tripping
- Float Latches When Tripped
- Variable Height Feature
- For Metal & Plastic Drain Pans



BG-101



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BG-101	Condensate Safety Overflow Switch	EA	20

CC-1 Condensate Safety Overflow Switch

- Position Anywhere Along Drain Pan
- Adjustable Activation Height - Minimum 1.5"
- Sensor Assembly Swivels to Accommodate Drain Pans with Sloped Sides
- Clamps Easily Over the Edge of All Drain Pan Types, Including Formed Plastic and Galvanized Sheet Metal



CC-1



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CC-1	Condensate Safety Overflow Switch	EA	12

CS1200 Condensate Safety Overflow Switch

- Position Anywhere Along Drain Pan
- Clamps Easily Over the Edge of All Secondary Drain Pans
- Rotate Housing to Adjust to Pan Angle
- Translucent Design for Easy & Fast Inspection
- LED Indicator Illuminates when Switch is Activated
- For Standard Rated Installations in Secondary Drain Pans



CS1200



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS1200	Condensate Safety Overflow Switch	EA	12

CONDENSATE MANAGEMENT | CONDENSATE DRAIN PANS

PLASTIC DRAIN PANS

Plastic Drain Pan

- Rolled Edges, Ribbed Bottom, Reinforced Corners
- PVC Fittings Included
- No Seams, No Rust, No Leakage

Complies with Southern Building Code

CATALOG NO.	BOTTOM DIMENSION		OVERALL DIMENSION		DEPTH		UOM	ORDER MULTIPLE
	IN.	CM.	IN.	CM.	IN.	CM.		
6-1838L	18" x 38"	46 x 97	20" x 40"	51 x 102	2"	5	EA	5
6-1838S	18" x 38"	46 x 97	20" x 40"	51 x 102	2"	5	EA	5
6-2424L	24" x 24"	61 x 61	26" x 26"	66 x 66	2"	5	EA	5
6-2626L	26" x 26"	66 x 66	28" x 28"	71 x 71	2"	5	EA	5
6-2739L	27" x 39"	69 x 99	29" x 41"	74 x 104	2"	5	EA	5
6-2748L	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	5
6-2763L	27" x 63"	69 x 160	29" x 65"	74 x 165	2"	5	EA	5
6-3030L	30" x 30"	76 x 76	32" x 32"	81 x 81	2"	5	EA	5
6-3050L	30" x 50"	76 x 127	32" x 52"	81 x 132	2"	5	EA	5
6-3060L	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
6-3060S	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
6-3263L	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5
6-3263L-F	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5
6-3636L	36" x 36"	91 x 91	38" x 38"	97 x 97	2"	5	EA	5
6-3660L	36" x 60"	91 x 152	38" x 62"	97 x 157	2"	5	EA	5
6-3660S	36" x 60"	91 x 152	38" x 62"	97 x 157	2"	5	EA	5

L = Drain Line Outlets in Long Side

S = Drain Line Outlets in Short Side




6-1838L



METAL DRAIN PANS

Seamless Metal Drain Pan

- Single-Piece Design
- Rolled Edge
- Two Outlets
- Fittings Included



6-M2748



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-M2748	26 Gauge Metal Drain Pan – 27" x 48"	EA	5
6-M2763	26 Gauge Metal Drain Pan – 27" x 63"	EA	5
6-M3030	26 Gauge Metal Drain Pan – 30" x 30"	EA	5
6-M3050	26 Gauge Metal Drain Pan – 30" x 50"	EA	5
6-M3060	26 Gauge Metal Drain Pan – 30" x 60"	EA	5
6-M3263	26 Gauge Metal Drain Pan – 32" x 63"	EA	5

Corrugated Edge Metal Drain Pan

- Single-Piece Design
- Rolled Edge
- Two Outlets
- Fittings Included



6-M2460L



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-M2460L	26 Gauge Metal Drain Pan – 24" x 60"	EA	5
6-M2656L	26 Gauge Metal Drain Pan – 26" x 56"	EA	5
6-M3066L	26 Gauge Metal Drain Pan – 30" x 66"	EA	5
6-M3070L	26 Gauge Metal Drain Pan – 30" x 70"	EA	5
6-M3172L	26 Gauge Metal Drain Pan – 31" x 72"	EA	5
6-M3265L	26 Gauge Metal Drain Pan – 32" x 65"	EA	5
6-M3636L	26 Gauge Metal Drain Pan – 36" x 36"	EA	5
6-M3274L	26 Gauge Metal Drain Pan – 32" x 74"	EA	5
6-M3160L	26 Gauge Metal Drain Pan – 31" x 60"	EA	5

CONDENSATE DRAIN PANS | CONDENSATE MANAGEMENT

HIGH RISE DRAIN PANS

High Rise Pan™

- Position AV Pads Where You Want Them
- Full 5" Rise from Bottom of Pan
- Heavy Reinforcement Throughout
- Water Flows Towards Sides
- Installation Kit Provided
(Condensate Safety Overflow Switch, Anti-Vibration Pads, Fitting)

Meets Requirements for Florida Building Code (307.23 Auxiliary and Secondary Drain Systems)



6-HK2748



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HK2748	High Rise Pan™ 27" x 48" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK2748-1	Single Pack Kit – High Rise Pan™ 27" x 48" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK2766	High Rise Pan™ 27" x 66" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK2766-1	Single Pack Kit – High Rise Pan™ 27" x 66" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK3050	High Rise Pan™ 30" x 50" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK3050-1	Single Pack Kit – High Rise Pan™ 30" x 50" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK3060	High Rise Pan™ 30" x 60" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK3060-1	Single Pack Kit – High Rise Pan™ 30" x 60" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1

Heavy Duty High Rise Pan™

- Full 4.25" Rise from Bottom of Pan
- Heavy Reinforcement Throughout
- Suitable for Hanging Applications
- Water Flows Towards Sides
- Installation Kit Provided
(Condensate Safety Overflow Switch, Anti-Vibration Pads, Fitting)



6-HK3060HD



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HK3050HD	Heavy Duty High Rise Pan 30" x 50"	EA	5
6-HK3060HD	Heavy Duty High Rise Pan 30" x 60"	EA	5
6-HK3070HD	Heavy Duty High Rise Pan 30" x 70"	EA	5

FURNACE PANS

Furnace Pans

- Heavy Duty Construction
- Installation Kit Provided
(Condensate Safety Overflow Switch, Heat Pump Risers, Fitting)



6-HK3378FUR



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HK3364FUR	Furnace Pan – 33" x 64" w/installation kit	EA	5
6-HK3378FUR	Furnace Pan – 33" x 78" w/installation kit	EA	5

CONDENSATE MANAGEMENT | CONDENSATE DRAIN PANS

WATER HEATER PANS

Water Heater Pans

Aluminum water heater pans can be installed under gas or electric water heaters to protect from water damage. Includes a 1" PVC drain fittings to allow for connection to indirect drain. Each pan is manufactured from .032 in. prime aluminum with a pre-cut side opening to accommodate a drain fitting. Pan depth is a minimum 2.5 in.



6-M22

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-M22	Galvanized Steel Water Heater Pan - 22 in.	EA	6
6-M24	Galvanized Steel Water Heater Pan - 24 in.	EA	6
6-M26	Galvanized Steel Water Heater Pan - 26 in.	EA	6
6-M30	Galvanized Steel Water Heater Pan - 30 in.	EA	6

SPECIALTY DRAIN PANS

Mini-Split System Drain Pans

- UV-stabilized and Reinforced Polypropylene
- Powder-coated Steel
- Comes with Mounting Hardware and Drain Pan Outlet



230-DPPL



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DPPL	Poly Condensate Drain Pan (Large)	EA	1
230-DPPM	Poly Condensate Drain Pan (Medium)	EA	1

Condensate Pump Pan

- Provides Redundant Protection from Water Overflows
- Fits Condensate Pump with CS-3 Switch
- No Seams, No Rust, No Leakage
- Pump and CS-3 not included



CP-PAN



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-PAN	Condensate Pump Pan	EA	24

Humidifier Drain Pan

- Safely Capture Overflow & Debris
- CS-3 Condensate Safety Overflow Switch Included for Extra Protection
- Easy Installation with Included Hardware



HM-PAN



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HM-PAN	Humidifier Drain Pan	EA	6

A/C Condensate Drain Pan Fittings

The Drain Pan Fittings are designed to be used with our Condensate Drain Pans.



6-5

6-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-1	3/4" Slip	EA	50
6-2	1" Slip	EA	50
6-3	3/4" Slip with Plastic Nut	EA	50
6-5	3/4" Female Pipe Thread	EA	50

CONDENSATE TREATMENTS | CONDENSATE MANAGEMENT

PAN TREATMENTS

Pro-Treat® Condensate Pan Treatment

- Controls Odor and Pan Overflows
- Combats Sludge, Slime, Fouling
- Helps Maintain Clean Drain Pan
- Approved for Computer Room Use



PRO-TREAT-151
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROTREAT-151*	100 Tablets/Jar, 1 Tablet - 3 Tons/Mo.	EA	12
PROTREAT-152	12 King Size Tablets/Jar, 1 Tablet - 3 Tons/Mo.	EA	12
PROTREAT-161	100 Tablets/Jar, 2 Tablets - 3 Tons/Mo.	EA	12
PROTREAT-200	200 Tablets/Jar, 2 Tablets - 3 Tons/Mo.	EA	12
PROTREAT-217	200 Thin Tablets/Jar, 3 Tablets - 3 Tons/Mo.	EA	12

*EPA Registered

Pro-Treat® Pan Strips

- Kills Odor-Causing Bacteria
- Controls Odor and Pan Overflows
- Combats Sludge, Slime, Fouling, and Algae Growth



PS-01
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PS-01	For Equipment from 1 to 2 Tons, 10 App.	EA	12
PS-03	For Equipment from 3 to 5 Tons, 6 App.	EA	12
PS-07	For Equipment from 7 to 12 Tons, 2 App.	EA	24
PS-20	For Equipment from 10 to 25 Tons, 1 App.	EA	24
PS-40	For Equipment from 40 to 50 Tons, 1 App.	EA	12

EPA Registered
Each Pan Strip is a 6-Month Treatment.

Flow-Plus® Condensate Pan Treatment

- Maintains Condensate Flow and Prevents Drain Pan Overflow
- Activated When Condensate Flows Over Surface
- Deodorizes
- Stays in Place
- No Residue



FLOW-PLUS-25
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FLOW-PLUS-200	200 Mini Tabs/Jar, For 1/3 to 3 Ton Units	EA	4
FLOW-PLUS-25	25 Mini Tabs/Jar, For 1/2 to 3 Ton Units	EA	12
FLOW-PLUS-6	Light Tonnage, For 3 to 5 Ton Units	EA	12
FLOW-PLUS-10	Medium Tonnage, For 5 to 20 Ton Units	EA	18
FLOW-PLUS-125	High Tonnage, For 20 to 50 Ton Units	EA	8
FLOW-PLUS-CP	6 Pump Treatment Tablets	EA	6
SCM-185-8	Flow-Plus® Polymer Pan Treatment, (1) - 8 lb. Tub	EA	1

NEUTRALIZATION

Horizontal Condensate Neutralizer

- Suitable for 400,000 BTU/h at 93% Efficiency
- Prevents Acidic Condensate from Corroding Drains and Sewer Systems
- Helps Maintain a Neutral Environment for Bacteria in Septic Systems
- Suitable for Use on All Types of Natural Gas and Propane Appliances
- Includes Initial Charge of Neutralization Media



CNHK-4K
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNH-4K	Corrosion Resistant Capsule Two Base/Wall Mounting Clips Two 3" Fill/Access Openings 3/4" NPT Threaded Inlet and Outlet Two 3/4" MNPT to 3/4" FNPT Unions Two 3/4" MNPT to 3/4" FPVC Socket Adapter Neutralization Media	EA	1
CNHK-4K	Corrosion Resistant Capsule Two Base/Wall Mounting Clips Two 3" Fill/Access Openings 3/4" NPT Threaded Inlet and Outlet Two 3/4" MNPT to 3/4" FNPT Unions Three 3/4" NPT to 1/2" Hose Barb Fittings 6 Hose Clamps 10' of Tubing 1/2" Barbed Y Fitting Neutralization Media	EA	1

Vertical Condensate Neutralizer

- Suitable for 400,000 BTU/h at 93% Efficiency
- Prevents Acidic Condensate from Corroding Drains and Sewer Systems
- Helps Maintain a Neutral Environment for Bacteria in Septic Systems
- Suitable for Use on All Types of Natural Gas and Propane Appliances
- Float System Indicates if Unit has Become Plugged
- Integral Bypass Feature Prevents Condensate Backflow into Appliance
- 3/4" FNTP Inlet and Outlet Connections
- Includes Initial Charge of Neutralization Media



CNV-4K
Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNV-4K	Vertical Condensate Neutralizer	EA	1

COND. MANAGEMENT | CON. TREATMENTS / INSTALL. ACCESS.

NEUTRALIZATION CONT'D

Neutralization Media

Prevents Acidic Condensate from Corroding Drains and Sewer Systems



CNT-3M



Neutralization Tank

- Suitable for 3 Million BTU/h at 93% Efficiency
- Prevents Acidic Condensate from Corroding Drains and Sewer Systems
- Helps Maintain a Neutral Environment for Bacteria in Septic Systems
- Suitable for Use on All Types of Natural Gas and Propane Appliances



CNT-3M



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNT-3M	Neutralization Tank	EA	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNM-4K	Replacement for CNV-4K, CNH-4K, CNHK-4K	EA	1
CNM-BULK	Replacement for CNV-4K, CNH-4K, CNHK-4K	EA	1
CNM-3M	Replacement for CNT-3M	EA	1

BRAIDED VINYL TUBING

Braided Clear Vinyl Tubing

Braided clear vinyl offers better strength and sealing than regular clear vinyl tubing and is very kink-resistant.



7-14B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-14B	1/4" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-14B50	1/4" ID Braided Clear Vinyl Tubing – 50' section	EA	1
7-38B	3/8" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-38B50	3/8" ID Braided Clear Vinyl Tubing – 50' section	EA	1
7-12B	1/2" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-12B50	1/2" ID Braided Clear Vinyl Tubing – 50' section	EA	1
7-58B	5/8" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-58B50	5/8" ID Braided Clear Vinyl Tubing – 50' section	EA	1
7-34B	3/4" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-34B50	3/4" ID Braided Clear Vinyl Tubing – 50' section	EA	1

INSTALLATION ACCESSORIES | CONDENSATE MANAGEMENT

CLEAR VINYL TUBING

Gorilla Tube® Clear Vinyl Tubing

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines, and humidifier overflows.

Several sizes from 1/4" to 1" diameter. Non-toxic clear vinyl chloride. Select Gorilla Tube® over standard clear vinyl tube because:

- Extra rigid design resists crimping and kinking due to durometer value of 80 (Shore A) and thicker wall
- Maximum service temperature 140°F (60°C)
- Better performance in cold weather climates.



7-14P

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-14P	1/4", .250" I.D., .360" O.D., .055 wall thickness	EA	1
7-38P	3/8", .375" I.D., .495" O.D., .060 wall thickness	EA	1
7-12P	1/2", .500" I.D., .631" O.D., .066 wall thickness	EA	1
7-58P	5/8", .625" I.D., .771" O.D., .073 wall thickness	EA	1
7-34P	3/4", .750" I.D., .913" O.D., .082 wall thickness	EA	1
7-78P	7/8", .875" I.D., 1.050" O.D., .088 wall thickness	EA	1
7-10P	1", 1.000" I.D., 1.215" O.D., .108 wall thickness	EA	1

Clear Vinyl Tubing

Clear vinyl hose applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.



7-14

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-316	3/16" ID Clear Vinyl Tubing – 100' section	EA	1
7-CVMINITUBE	3/16" ID CVMINI Tubing – 100' section	EA	1
7-14	1/4" ID Clear Vinyl Tubing – 100' section	EA	1
7-38	3/8" ID Clear Vinyl Tubing – 100' section	EA	1
7-12	1/2" ID Clear Vinyl Tubing – 100' section	EA	1
7-58	5/8" ID Clear Vinyl Tubing – 100' section	EA	1
7-34	3/4" ID Clear Vinyl Tubing – 100' section	EA	1
7-78	7/8" ID Clear Vinyl Tubing – 50' section	EA	1
7-10	1" ID Clear Vinyl Tubing – 50' section	EA	1

POLYETHYLENE TUBING

Polyethylene Tubing

F.D.A. approved, flexible, non-toxic tubing. Tasteless and odorless, lightweight, low density. Ideal for drinking water lines, evaporative coolers, and radiant heating.



PE-104

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PE-104	Polyethylene Tubing - 11/64ID, 1/4OD, 100FT	EA	1
PE-012	Polyethylene Tubing - 3/8ID, 1/2OD, 100FT	EA	1
PE-014	Polyethylene Tubing - 1/8ID, 1/4OD, 100FT	EA	1
PE-038	Polyethylene Tubing - 1/4ID, 3/8OD, 100FT	EA	1
PE-058	Polyethylene Tubing - 1/2ID, 5/8OD, 100FT	EA	1

PVC PIPE

ClearVue™ Tube

Clear, 3/4" schedule 40 PVC ideal for installing as condensate drain lines in other areas where seeing the inside of the tubing is helpful. ClearVue™ Tube makes it easy to quickly spot build up or obstructions in drain lines for faster troubleshooting. Available in 5' lengths.



CV-TUBE

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CV-TUBE	ClearVue™ Tube – 5' section	EA	50

CONDENSATE MANAGEMENT | INSTALLATION ACCESSORIES

PVC PIPE

CPVC-CTS Pipe by FlowGuard® Gold™

CTS = Copper Tube Size

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4700-12	1/2" x 10' CPVC Pipe, 500'	EA	1
4700-34	3/4" x 10' CPVC Pipe, 250'	EA	1



4700-12

Polyvinyl Chloride, White PVC 1120

CATALOG NO.	DESCRIPTION	UOM	PIPES/PALLET	ORDER MUL./PALLET
5-401-P	PVC, 3/4" Pipe, Sch. 40, 10'	EA	240	2400'
5-404-P	PVC, 2" Pipe, Sch. 40, 10'	EA	210	2100'
5-405-P	PVC, 3" Pipe, Sch. 40, 10'	EA	92	920'
5-407-P	PVC, 3/4" Pipe, Sch. 40, 20'	EA	240	4800'
5-416-P	PVC 1" Pipe Sch. 40, 20'	EA	150	3000'
5-417-P	PVC, 1-1/4" Pipe, Sch. 40, 20'	EA	196	3920'
5-418-P	PVC, 1-1/2" Pipe, Sch. 40, 20'	EA	915	6300'
5-2002-P	PVC, 3/4" Pipe, 200 PSI, 10'	EA	120	2400'
5-2005-P	PVC, 3/4" Pipe, 200 PSI, 20'	EA	30	4800'



5-2002-P

PVC FITTINGS

CPVC-CTS Fittings by FlowGuard® Gold™

CTS = Copper Tube Size

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4701-12	1/2" Coupling S x S	EA	20
4704-12	1/2" Adapter M x S	EA	20
4707-12	1/2" 90° Elbow S x S	EA	20
4711-12	1/2" Tee S x S x S	EA	20
47072-12	1/2" 90° Street Ell S x S	EA	10
4718-12	3/4" x 1/2" CPVC Bushing	EA	10
4701-34	3/4" Coupling S x S	EA	20
4703-34	3/4" Adapter F x S	EA	25
4704-34	3/4" Adapter M x S	EA	10
4706-34	3/4" 45° Elbow S x S	EA	20
4707-34	3/4" 90° Elbow S x S	EA	20
4711-34	3/4" Tee S x S x S	EA	20
47072-34	3/4" 90° Street Ell S x S	EA	10



4703-34

Couplings (Hub x Hub)



5-100020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-100020	2" Couplings (Hub x Hub)	EA	100
5-100030	3" Couplings (Hub x Hub)	EA	60
510-D102338	3" x 2" Couplings (Hub x Hub)	EA	20

90 Elbow (Hub x Hub)



510-D304020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-300020	2" 90 Elbow (Hub x Hub)	EA	50
5-300030	3" 90 Elbow (Hub x Hub)	EA	25
510-D304020	2" Long Sweep 90 Elbow (Hub x Hub)	EA	25
510-D304030	3" Long Sweep 90 Elbow (Hub x Hub)	EA	10

45 Elbows



5-321020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-321020	2" 45 Elbow (Hub x Hub)	EA	50
5-321030	3" 45 Elbow (Hub x Hub)	EA	20
510-D323020	2" 45 Street Elbow (Hub x SPIG)	EA	50
510-D323030	3" 45 Street Elbow (Hub x SPIG)	EA	20

DWV Bend Fittings



510-D309030

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-D309020	2" Long Sweep (Hub x SPIG)	EA	25
510-D309030	3" Long Sweep (Hub x SPIG)	EA	20

INSTALLATION ACCESSORIES | CONDENSATE MANAGEMENT

PVC FITTINGS CONT'D

DWV Vent Tee



510-D441020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-D441020	2" Vent Tee	EA	25

Tee (Slip x Slip x Slip)



5-401005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-401005	1/2" Tee	EA	50
5-401007	3/4" Tee	EA	50
5-401010	1" Tee	EA	50
5-401020	2" Tee	EA	25
5-401030	3" Tee	EA	10

90 Ell (Slip x Slip)



5-406005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-406005	1/2" 90 Ell	EA	50
5-406007	3/4" 90 Ell	EA	50
5-406010	1" 90 Ell	EA	50
5-406020	2" 90 Ell	EA	25
5-406030	3" 90 Ell	EA	10

90 Ell (Slip x FIPT)



5-407005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-407005	1/2" 90 Ell	EA	50
5-407007	3/4" 90 Ell	EA	50

90 Street Ell (SPIG x Slip)



5-409005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-409005	1/2" 90 Street Ell	EA	50
5-409007	3/4" 90 Street Ell	EA	50
5-409010	1" 90 Street Ell	EA	50

DWV Bushings



510-437338

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-437338	3" x 2" Reducing Bushing (SPIG x SLIP)	EA	10
510-438338	3" x 2" Bushing (SPIG x FIPT)	EA	10

Tee (Slip x FIPT x Slip)



5-402007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-402007	3/4" Tee (S x S x FIPT)	EA	50

Traps



5-409



5-408

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-408	3/4" "P" Trap	EA	100
5-409	3/4" Running Trap	EA	100
5-410	3/4" Mini "P" Trap	EA	100
5-411	1" "P" Trap	EA	50
5-412	1/2" "P" Trap	EA	100
5-414	3/4" "J" Trap	EA	100

90 Ell Reducing (Slip x FIPT)



5-407131

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-407131	1" x 3/4" 90 Ell Reducing	EA	50

45 Ell (Slip x Slip)



5-417005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-417005	1/2" 45 Ell	EA	50
5-417007	3/4" 45 Ell	EA	50
5-417010	1" 45 Ell	EA	50
5-417012	1-1/4" 45 Ell	EA	25
5-417020	2" 45 Ell	EA	25
5-417030	3" 45 Ell	EA	10

Plug (Slip)



5-449007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-449030	3" Plug	EA	10

CONDENSATE MANAGEMENT | INSTALLATION ACCESSORIES

PVC FITTINGS CONT'D

90 Street Ell (MIPT x Slip)



5-410005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-410005	1/2" 90 Street Ell	EA	50
5-410007	3/4" 90 Street Ell	EA	50
5-410010	1" 90 Street Ell	EA	50

Female Adapter (Slip x FIPT)



5-435005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-435005	1/2" Female Adapter	EA	100
5-435007	3/4" Female Adapter	EA	50
5-435010	1" Female Adapter	EA	50

Female Adapter Reducing (Slip x FIPT)



5-435101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-435101	3/4" x 1/2" Female Adapter Reducing	EA	50
5-435102	3/4" x 1" Female Adapter Reducing	EA	50

Male Adapter Reducing (MIPT x Slip)



5-436074

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-436074	1/2" x 3/4" Male Adapter Reducing	EA	50
5-436101	3/4" x 1/2" Male Adapter Reducing	EA	50
5-436102	3/4" x 1" Male Adapter Reducing	EA	50
5-436131	1" x 3/4" Male Adapter Reducing	EA	50

Reducer Bushing (SPIG x Slip)



5-437101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-437101	3/4" x 1/2" Reducer Bushing	EA	100
5-437130	1" x 1/2" Reducer Bushing	EA	100
5-437131	1" x 3/4" Reducer Bushing	EA	100
5-437210	1-1/2" x 3/4" Reducer Bushing	EA	25

Coupling (Slip x Slip)



5-429005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-429005	1/2" Coupling	EA	100
5-429007	3/4" Coupling	EA	50
5-429010	1" Coupling	EA	50
5-429015	1-1/2" Coupling	EA	25
5-429020	2" Coupling	EA	25
5-429030	3" Coupling	EA	10

Cap (Slip)



5-447007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-447007	3/4" Cap	EA	100
5-447010	1" Cap	EA	100

Male Adapter (MIPT x Slip)



5-436005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-436005	1/2" Male Adapter	EA	100
5-436007	3/4" Male Adapter	EA	50
5-436010	1" Male Adapter	EA	50

Plug (MIPT)



5-450007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-450007	3/4" Plug	EA	50

Reducer Bushing (SPIG X FIPT)



5-438101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-438101	3/4" x 1/2" Reducer Bushing	EA	100
5-438131	1" x 3/4" Reducer Bushing	EA	100

Adapter (Insert x Slip)



5-474007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-474007	3/4" Adapter (Insert x Slip)	EA	50

INSTALLATION ACCESSORIES | CONDENSATE MANAGEMENT

PVC FITTINGS CONT'D

Cap (FIPT)



5-448007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-448007	3/4" Cap	EA	100

Clean Out Tee



510-3400

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-3400-10	3/4" Clean Out Tee	EA	10
510-3400	3/4" Clean Out Tee	EA	50

Plastic DWV J-Hooks



515-J2000

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
515-J2000	2" x 9" DWV Swiveling J-Hook	EA	25
515-J3000	3" x 7-1/2" DWV Swiveling J-Hook	EA	25

PIPE CEMENTS, PRIMERS, AND CLEANERS

PVC Cement – Clear

PVC Cement is clear. All cans have brushtop applicator.



5-12

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-14	Oatey #31012 – 1/4 Pint	EA	24
5-12	Oatey #31013 – 1/2 Pint	EA	24
5-10	Oatey #31014 – 1 Pint	EA	24
5-32	Oatey #31015 – 32 oz.	EA	12

PVC Primer – Clear

Recommended for all PVC and CPVC applications. Can be used on all sizes and schedules. Formulated to remove all surface dirt, grease, and grime as well as soften the pipe in preparation for solvent cement. This primer can be used when you want a cleaner installation. Meets ASTM F-656 and is NSF listed.



530-30752

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30752	PVC Primer – Clear – 16 oz.	EA	24

Purple Primer for PVC Pipe and Fittings (Black Label)

Recommended for all PVC and CPVC installations – all sizes/schedules. Purple tinted primer formulated to remove surface dirt and grease as well as soften the pipe surface to allow for a fast, secure and permanent solvent weld. For use in areas where codes call for primer verification.



530-30756

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30755	Purple Primer – 4 oz.	EA	24
530-30756	Purple Primer – 8 oz.	EA	24
530-30757	Purple Primer – 16 oz.	EA	24

NSF and UPC listed. Exceeds ASTM F-656.

Heavy Duty PVC Cement

Heavy-bodied clear cement recommended for use on PVC pipe and fittings up to 12" in diameter for Sch. 40 and Sch. 80 potable water pressure pipe, gas, conduit, drain waste and vent pipe. Exceeds ASTM D-2564.



530-30863

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30850	Heavy Duty Cement – 4 oz.	EA	24
530-30863	Heavy Duty Cement – 8 oz.	EA	24
530-30876	Heavy Duty Cement – 16 oz.	EA	24

Rain-R-Shine Blue Cement

Medium-bodied blue colored cement for PVC pipe and fittings up to 6 inches in diameter. A very fast setting cement formulated for wet conditions and/or when quick pressurization and fast installation is needed. Exceeds ASTM D-2564.



530-30891

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30890	Rain-R-Shine Cement – 4 oz.	EA	24
530-30891	Rain-R-Shine Cement – 8 oz.	EA	24
530-30893	Rain-R-Shine Cement – 16 oz.	EA	24

CONDENSATE MANAGEMENT | INSTALLATION ACCESSORIES

PIPE CEMENTS, PRIMERS, AND CLEANERS CONT'D

All-Purpose Clear Cement for ABS, PVC and CPVC Pipe and Fittings

Heavy-bodied clear cement recommended for use on ABS, PVC, and CPVC pipe and fittings up to 12" in diameter. Flows freely and provides a thick layer of cement on the pipe. Apply at temperatures 40° to 90°F.



530-30821

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30818	Clear Cement – 4 oz.	EA	24
530-30821	Clear Cement – 8 oz.	EA	24
530-30834	Clear Cement – 16 oz.	EA	24

PVC Gray Cement for High Efficiency Furnaces, Vent and Make-Up Air

Medium-bodied gray colored cement for use on Sch. 40 conduit, drain waste, and vent pipe. Flows freely and covers with a thicker layer than regular PVC. Can be applied at temperatures 40° to 100°F.



530-30884

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30884	Gray Cement – 8 oz.	EA	24
530-30885	Gray Cement – 16 oz.	EA	24

NSF and UPC listed. Exceeds ASTM D-2564.

All Weather PVC Cement

Medium-bodied cement for PVC pipe and fittings up to 6". Formulated for fast initial set-up from -15°F to 100°F. Exceeds ASTM D-2564.



530-31132

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-31132	All Weather Cement – 16 oz.	EA	24

Clear Cleaner

Clear Cleaner is a simple and effective cleaner formulated for ABS, PVC and CPVC pipe and fittings that flows freely and evaporates quickly.



530-10202

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-10202	Clear Cleaner – 16 oz.	EA	24
530-10203	Clear Cleaner – 8 oz.	EA	24

Pro-Prime™ Clear PVC Primer

Clear primer that removes dirt and oil from the surface of Type I and II PVC piping. Softens the piping to prepare for solvent welding. Pro-Prime Clear primer meets ASTM Standard F-656.



PPC-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PPC-4	Pro-Prime™ Clear – 4 oz. Brush-Top Container	EA	24
PPC-8	Pro-Prime™ Clear – 8 oz. Brush-Top Container	EA	24
PPC-16	Pro-Prime™ Clear – 16 oz. Brush-Top Container	EA	24

Medium Orange CPVC Cement

Medium Orange CPVC Cement is formulated for use on all schedules and classes of CPVC pipe and fittings up to 6" diameter with interference fit.



530-11029

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-11029	Medium Orange CPVC Cement – 4 oz.	EA	24

Pro-Weld™ PVC Cement (Regular Body)

Pro-Weld™ PVC Cement is a clear, regular-bodied solvent cement designed to be used on Type I and II PVC pipe and fittings up to and including 4 inch diameter. Pro-Weld™ meets ASTM Standard D-2564.



PW-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PW-4	Pro-Weld™ – 4 oz. Brush-Top Container – Regular Body	EA	24
PW-8	Pro-Weld™ – 8 oz. Brush-Top Container – Regular Body	EA	24
PW-16	Pro-Weld™ – 16 oz. Brush-Top Container – Regular Body	EA	24
PW-32	Pro-Weld™ – 32 oz. Brush-Top Container – Regular Body	EA	12

Pro-Weld™ PVC Cement (Universal – PVC/ABS/CPVC)

Pro-Weld™ Universal Cement is a clear, medium-bodied, high strength cement for use on PVC to PVC, CPVC to CPVC, and ABS to ABS connections. Pro-Weld Universal sets up fast and works with all rigid schedule 40 and 80 piping up to 6 inches in diameter. Complies with ASTM D2564, D2235, and F493.



PWU-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWU-4	Pro-Weld™ – 4 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24
PWU-8	Pro-Weld™ – 8 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24
PWU-16	Pro-Weld™ – 16 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24

Pro-Prime™ PVC Primer (Purple)

A purple-tinted primer formulated to remove dirt and oil from the surface of Type I and II PVC piping, as well as soften the piping in preparation for solvent welding. Pro-Prime™ contains purple pigment which provides verification that the primer has been applied to the pipe surface. Pro-Prime™ meets ASTM Standard F-656.



PP-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PP-4	Pro-Prime™ – 4 oz. Brush-Top Container	EA	24
PP-8	Pro-Prime™ – 8 oz. Brush-Top Container	EA	24
PP-16	Pro-Prime™ – 16 oz. Brush-Top Container	EA	24
PP-32	Pro-Prime™ – 32 oz. Can	EA	12

INSTALLATION ACCESSORIES | CONDENSATE MANAGEMENT

PIPE CEMENTS, PRIMERS, AND CLEANERS CONT'D

Pro-Weld™ PVC Cement (Heavy Body)

Pro-Weld™ Heavy Body is a clear, heavy-bodied, very high strength industrial grade PVC cement. It has a medium setting time and works with all rigid schedule 40 and 80 pipe diameters up to 12 inches. Complies with ASTM D2564 and NSF.



PWH-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWH-4	Pro-Weld™ – 4 oz. Brush-Top Container – Heavy Body	EA	24
PWH-8	Pro-Weld™ – 8 oz. Brush-Top Container – Heavy Body	EA	24
PWH-16	Pro-Weld™ – 16 oz. Brush-Top Container – Heavy Body	EA	24

Pro-Weld™ PVC Cement (Pool and Turf – Blue)

Pro-Weld™ Blue Pool and Turf is a blue colored, medium-bodied, high strength PVC cement for welding rigid or flexible PVC in wet conditions where the system needs to be pressurized quickly. Pro-Weld Blue Pool and Turf sets up very fast and works with all rigid and flexible schedule 40 and 80 pipe diameters up to 6 inches. Complies with ASTM D2564 and NSF.



PWB-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWB-4	Pro-Weld™ – 4 oz. Brush-Top Container – Pool and Turf – Blue	EA	24
PWB-8	Pro-Weld™ – 8 oz. Brush-Top Container – Pool and Turf – Blue	EA	24
PWB-16	Pro-Weld™ – 16 oz. Brush-Top Container – Pool and Turf – Blue	EA	24

Pro-Weld™ Weather-ALL

Pro-Weld™ PVC Cement is a clear, regular-bodied solvent cement designed to be used on Type I and II PVC pipe and fittings up to and including 4 inch diameter. Pro-Weld™ meets ASTM Standard D-2564 and is usable in cold weather to -15°F and hot weather to 110°F.



PWW-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWW-4	Pro-Weld™ – 4 oz. Brush-Top Container – All Weather Regular Body	EA	24
PWW-8	Pro-Weld™ – 8 oz. Brush-Top Container – All Weather Regular Body	EA	24
PWW-16	Pro-Weld™ – 16 oz. Brush-Top Container – All Weather Regular Body	EA	24

Un-Purple Primer

Hercules® Un-Purple Primer is formulated for use on all schedules and classes of PVC pipe and fittings. It appears clear, but shows purple under UV light. It makes every installation clean and look professional.



530-60445

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-60445	Hercules® Un-Purple Primer, 16 oz.	EA	1

NYLON FITTINGS*

Male Adapter (Barb x MIPT)



701-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-001	Adapter – 1/2" Barb x 1/2" MIPT, pack of 2	PK	1
701-002	Adapter – 1/2" Barb x 3/4" MIPT, pack of 2	PK	1
701-003	Adapter – 1/2" Barb x 3/8" MIPT, pack of 2	PK	1
701-007	Adapter – 3/4" Barb x 3/4" MIPT, pack of 2	PK	1
701-012	Adapter – 3/8" Barb x 1/2" MIPT, pack of 2	PK	1
701-013	Adapter – 3/8" Barb x 3/8" MIPT, pack of 2	PK	1
701-014	Adapter – 5/8" Barb x 3/4" MIPT, pack of 2	PK	1
701-043	Adapter – 3/8" Barb x 3/4" MIPT, pack of 2	PK	1

Garden Hose Adapters



701-009

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-009	Adapter – 3/4" MGHT x 3/4" FIPT, pack of 2	PK	1
701-011	Adapter – 3/4" MIPT x 3/4" FGHT, pack of 2	PK	1

Female Adapter (Barb x FIPT)



701-006

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-006	Adapter – 3/4" Barb x 3/4" NPT, pack of 2	PK	1
701-041	Adapter – 1/2" Barb x 1/2" NPT, pack of 2	PK	1

Bushing (MIPT x FIPT)



701-015

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-015	Bushing – 1" MIPT x 3/4" FIPT, pack of 2	PK	1
701-017	Bushing – 3/4" MIPT x 1/2" FIPT, pack of 2	PK	1

*All fittings packaged with identification. To order nylon fittings in bulk, enter catalog number followed by the letter "B." For example, 701-001B is the bulk part number for 701-001. Bulk sold in packs of 100.

CONDENSATE MANAGEMENT | INSTALLATION ACCESSORIES

NYLON FITTINGS* CONT'D

Elbow (Barb x Barb)



701-018

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-018	Elbow – 1/2" Barb, pack of 2	PK	1
701-023	Elbow – 3/4" Barb, pack of 2	PK	1
701-040	Elbow – 5/8" Barb, pack of 2	PK	1
701-046	Elbow – 3/8" Barb, pack of 2	PK	1

Female Adapter Elbow (Barb x FIPT)



701-019

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-019	Elbow – 1/2" Barb x 3/4" NPT, pack of 2	PK	1

Male Adapter Elbow (Barb x MIPT)



701-020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-020	Elbow – 1/2" Barb x 3/4" MIPT, pack of 2	PK	1
701-025	Elbow – 3/4" Barb x 3/4" MIPT, pack of 2	PK	1
701-028	Elbow – 5/8" Barb x 3/4" MIPT, pack of 2	PK	1

Hose Mender (Barb x Barb)



701-029

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-029	Hose Mender – 1/2" Barb, pack of 2	PK	1
701-030	Hose Mender – 1/4" Barb, pack of 2	PK	1
701-031	Hose Mender – 3/4" Barb, pack of 2	PK	1
701-032	Hose Mender – 3/8" Barb, pack of 2	PK	1
701-033	Hose Mender – 5/8" Barb, pack of 2	PK	1

Tee (Barb x Barb x Barb)



701-034

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-034	Tee – 1/2" Barb, pack of 2	PK	1
701-035	Tee – 1/2" x 3/4" x 1/2" Barb, pack of 2	PK	1
701-037	Tee – 3/4" Barb, pack of 2	PK	1
701-038	Tee – 3/8" Barb, pack of 2	PK	1
701-039	Tee – 5/8" Barb, pack of 2	PK	1

*All fittings packaged with identification. To order nylon fittings in bulk, enter catalog number followed by the letter "B." For example, 701-001B is the bulk part number for 701-001. Bulk sold in packs of 100.

DRAIN TRAPS AND KITS

Waterless Trap

- Prevents Unwanted Air Leakage from Condensate Line
- Will Not Freeze or Dry Out
- Eliminates Sludge Buildup
- For Negative Pressure Applications



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WTRAP	Waterless Trap	EA	1

Universal Alarm

- Works with Asurity Float and Safety Switches on 24 VAC Control Circuits
- Two Wire Connections for Easy Hook Up
- Low Voltage Alarm



UA-1



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
UA-1	Universal Alarm	EA	1

A/C Easy Tee® & Service Tool

- Quickly Clear Condensate Lines
- Never Cut Condensate Lines Again
- Complies with Code 307.2.5
- ET75 packed in 20 piece counter display
- ST75 packed in 6 piece counter display



ET75

ST75



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ET75	A/C Easy Tee® Cleanout Port	EA	1
ST75	A/C Easy Tee® Service Tool Set	EA	1

Drain Trap Kit

- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



DTK113



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK113	Drain Trap Kit	EA	1

INSTALLATION ACCESSORIES | CONDENSATE MANAGEMENT

DRAIN TRAPS AND KITS CONT'D

Drain Trap Kit w/ Cleaning Brush

- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK113B	Drain Trap Kit w/Cleaning Brush	EA	1

Drain Trap Kit w/Safety Overflow Switch

- Cleaning Brush
- Float Switch
- Cross
- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK207	Drain Trap Kit w/Safety Overflow Switch	EA	1

Drain Trap Kit w/Safety Overflow Switch

- Cleaning Brush
- Float Switch
- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 3" Drop



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK205	Drain Trap Kit w/Safety Overflow Switch	EA	1

Drain Trap Kit w/Safety Overflow Switch


- Cleaning Brush
- Float Switch
- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK210	Drain Trap Kit w/Safety Overflow Switch	EA	1

ClearVue™ Traps

These traps are made from smooth, clear PVC with no flat spots to restrict flow. With these ClearVue™ traps its easy to see directly into them to detect blockages and prevent problems before they become severe. Ideal for installation in condensate drain lines.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CV-PTRAP	ClearVue™ 3/4" P trap	EA	25
CV-RTRAP	ClearVue™ 3/4" R trap	EA	25
CV-UTRAP	ClearVue™ 3/4" U trap	EA	100
CV-JTRAP	ClearVue™ 3/4" J trap	EA	100

DUCTLESS DRAIN LINE TUBING AND FITTINGS

Smooth Drain for Ductless Systems

The Asurity® Smooth Drain Line, 230-DL16-S for ductless systems is a unique non-kinking drain line for mini-split units, with a smooth internal surface. The smooth internal surface minimizes trapped water that can promote biological growth, minimizing the possibility of blockages and foul odor formation. This 16mm diameter drain line is used for mini-split installations. Available in 98 feet lengths.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DL16-S	Smooth Drain Line - 98' section	EA	1

Mini-Split Drain Adapters

Mini-Split fan units – either ceiling cassettes or wall cassettes – typically have a unique (metric) drain line fitting. DiversiTech's adapters convert this metric fitting to standard drain line tubing sizes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DLFY	Mini-Split Drain Line Y	EA	1
230-DLF16	16mm Mini-Split Drain Line Adapter	EA	1
230-DLF18	18mm Mini-Split Drain Line Adapter	EA	1
230-DLF20	20mm Mini-Split Drain Line Adapter	EA	1
230-DLF25	25mm Mini-Split Drain Line Adapter	EA	1
230-DLF32	32mm Mini-Split Drain Line Adapter	EA	1

Mini-Split Condensate Drain Line

A unique drain line for mini-split units. This large diameter drain line is typical for mini-split installations. Furnished in 160 feet lengths with cut marks every 3.28 feet. Accommodates 5/8" and 3/4" connections.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DL16	5/8" ID Mini-Split Drain Line - 160' section	EA	1
230-DL16-20	5/8" ID Mini-Split Drain Line - 20' section	EA	1

DEVCO



Plan-O-Gram for DEVCO Elec Rack	43
Plan-O-Gram for DEVCO Ezc Rack	44
Plan-O-Gram for DEVCO Combo Rack	45
DEVCO Racks Master Item List (By Racks)	46-47
Slip-On Solderless Terminals	48-49
Special Purpose Solderless Terminals	49-50
Standard Solderless Terminals	50-51
High Temperature Solderless Terminals	52
Terminal Kits	53
Anchors	54
Plastic Anchor Kits	55
Boxes, Rings, and Covers	56-57
Cable Connectors	57-58
Cable Ties and Accessories	58-59
Conduit Fittings	59-60
General Tools	60
Nuts and Bolts	61-62
Power Cords and Work Lights	62
Screws	62
Specialty Fasteners	63
Specialty Fittings	64
Storage Containers	64
Tapes	64
Testers, Leads, Clips, Fuses	65
Wire	65-66
Wiring Devices	66-70

How to sell DEVCO® products

DEVCO® merchandising displays are an easy and attractive way to showcase a variety of DEVCO® products in your store. Offered in three different versions, each display rack includes everything you need to create extra sales for your business.

Easy to Display

DEVCO® provides turnkey merchandising solutions for wholesale distribution. Attractive, easy to set-up merchandising displays provide a great way to highlight DEVCO® products and make it easy for customers to find what they need. The point of sale display merchandises the products, enabling the distributor to add additional sales.

The products merchandised on the carousel are impulse buy items. The items are packed so they cost the contractor only a few dollars, and most are less than \$10 each.

Easy to Profit

DEVCO® displays provide a typical distributor branch with easy add-on sales that build profits. Each display can generate significant sales and margins for the store while providing contractors with the parts they need to finish the job. These self-service displays are a great way to increase revenue with minimal effort.

The Perfect Plan


Each DEVCO® Merchandising display comes with a complete plan-o-gram to make merchandising it simple and fast. And there are three different versions available so you can choose the display that's right for your business and customers.

And when you purchase the DEVCO® products to fill it up, the merchandising rack is **loaned free of charge. Special ordering requirements. Contact DiversiTech representative for specifics.**




Display Rack	Featured Products
EZC	Solderless terminals, ground connectors, fasteners, anchor kits, cable ties, washers, hex nuts, cable clamps, sheet metal screws and hose clamps
Electrical	Ground adaptors, outlets, boxes, bushings, cable connectors, extension rings, indicator lights, plugs and connectors, receptacles, reducing washers, toggle switches and hook up wire
Combo	Solderless terminals, insulated rings, ground adaptors, covers, reducing washers, plugs and connectors, hook up wire, fasteners, hex nuts and self drilling screws

PLAN-O-GRAM FOR DEVCO ELEC RACK (MKT-POP-DEVELEC)


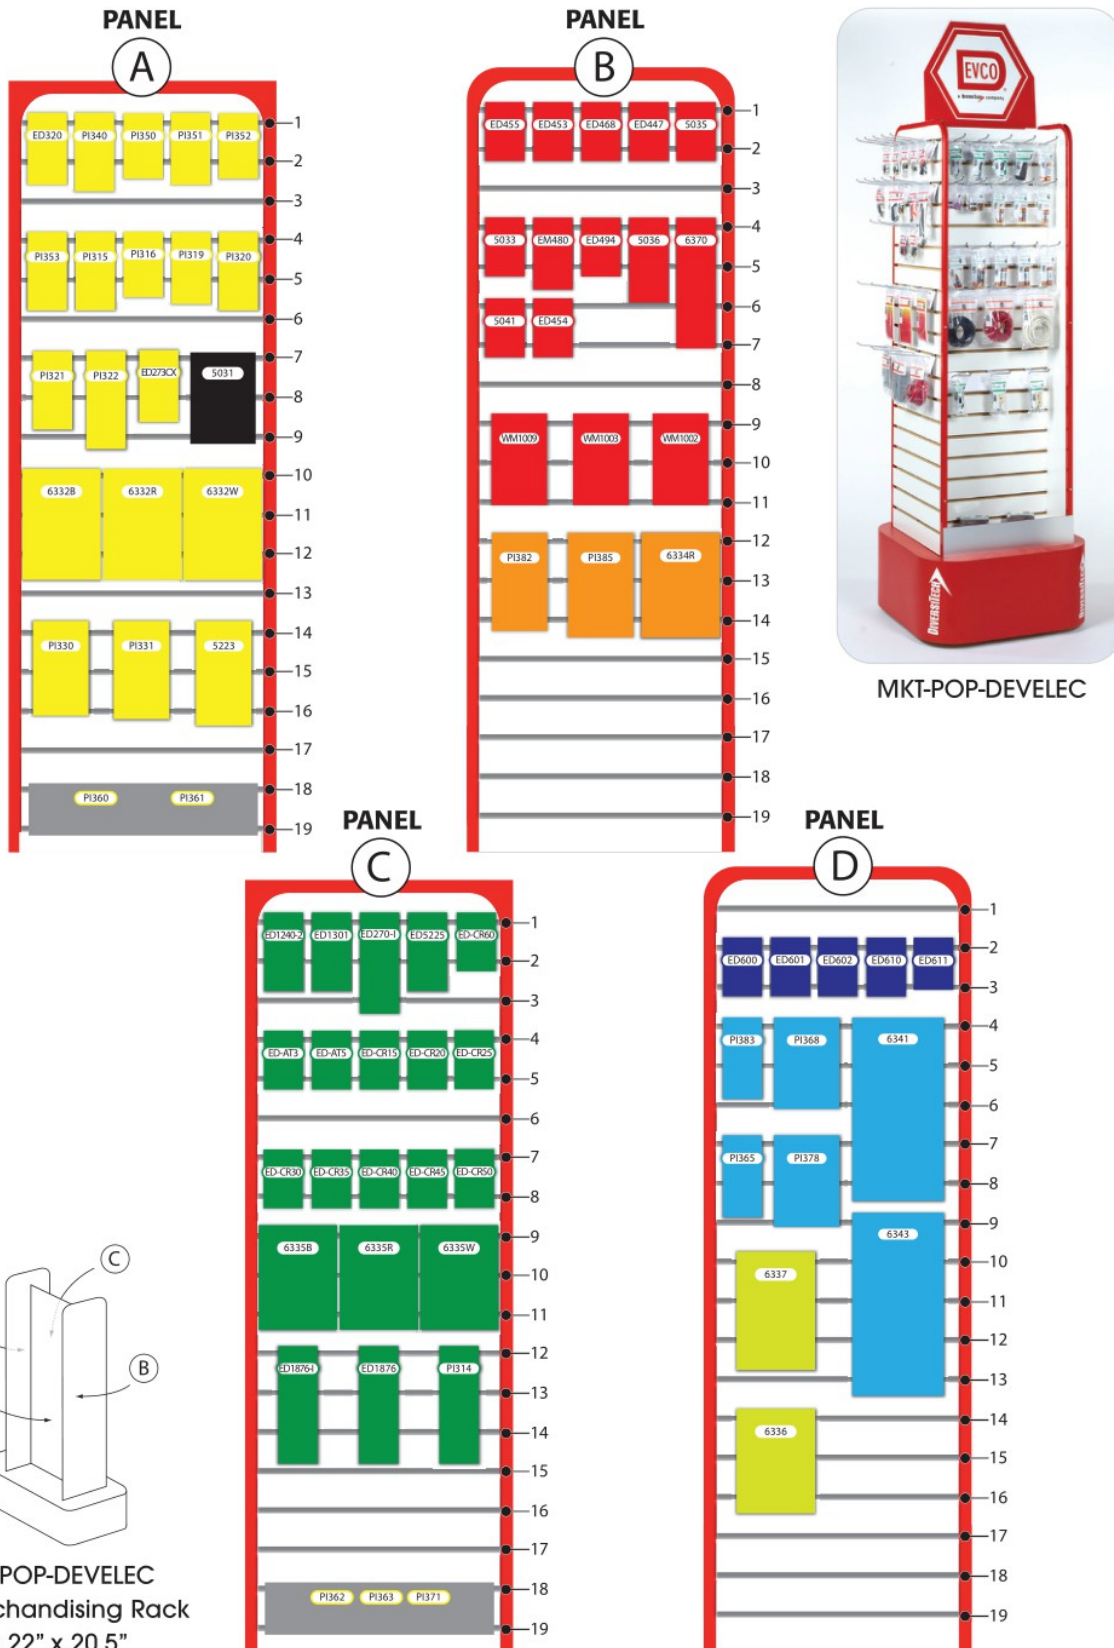


MKT-POP-DEVELEC
Merchandising Rack
72" x 22" x 20.5"

PLAN-O-GRAM FOR DEVCO EZC RACK (MKT-POP-DEVEZC)

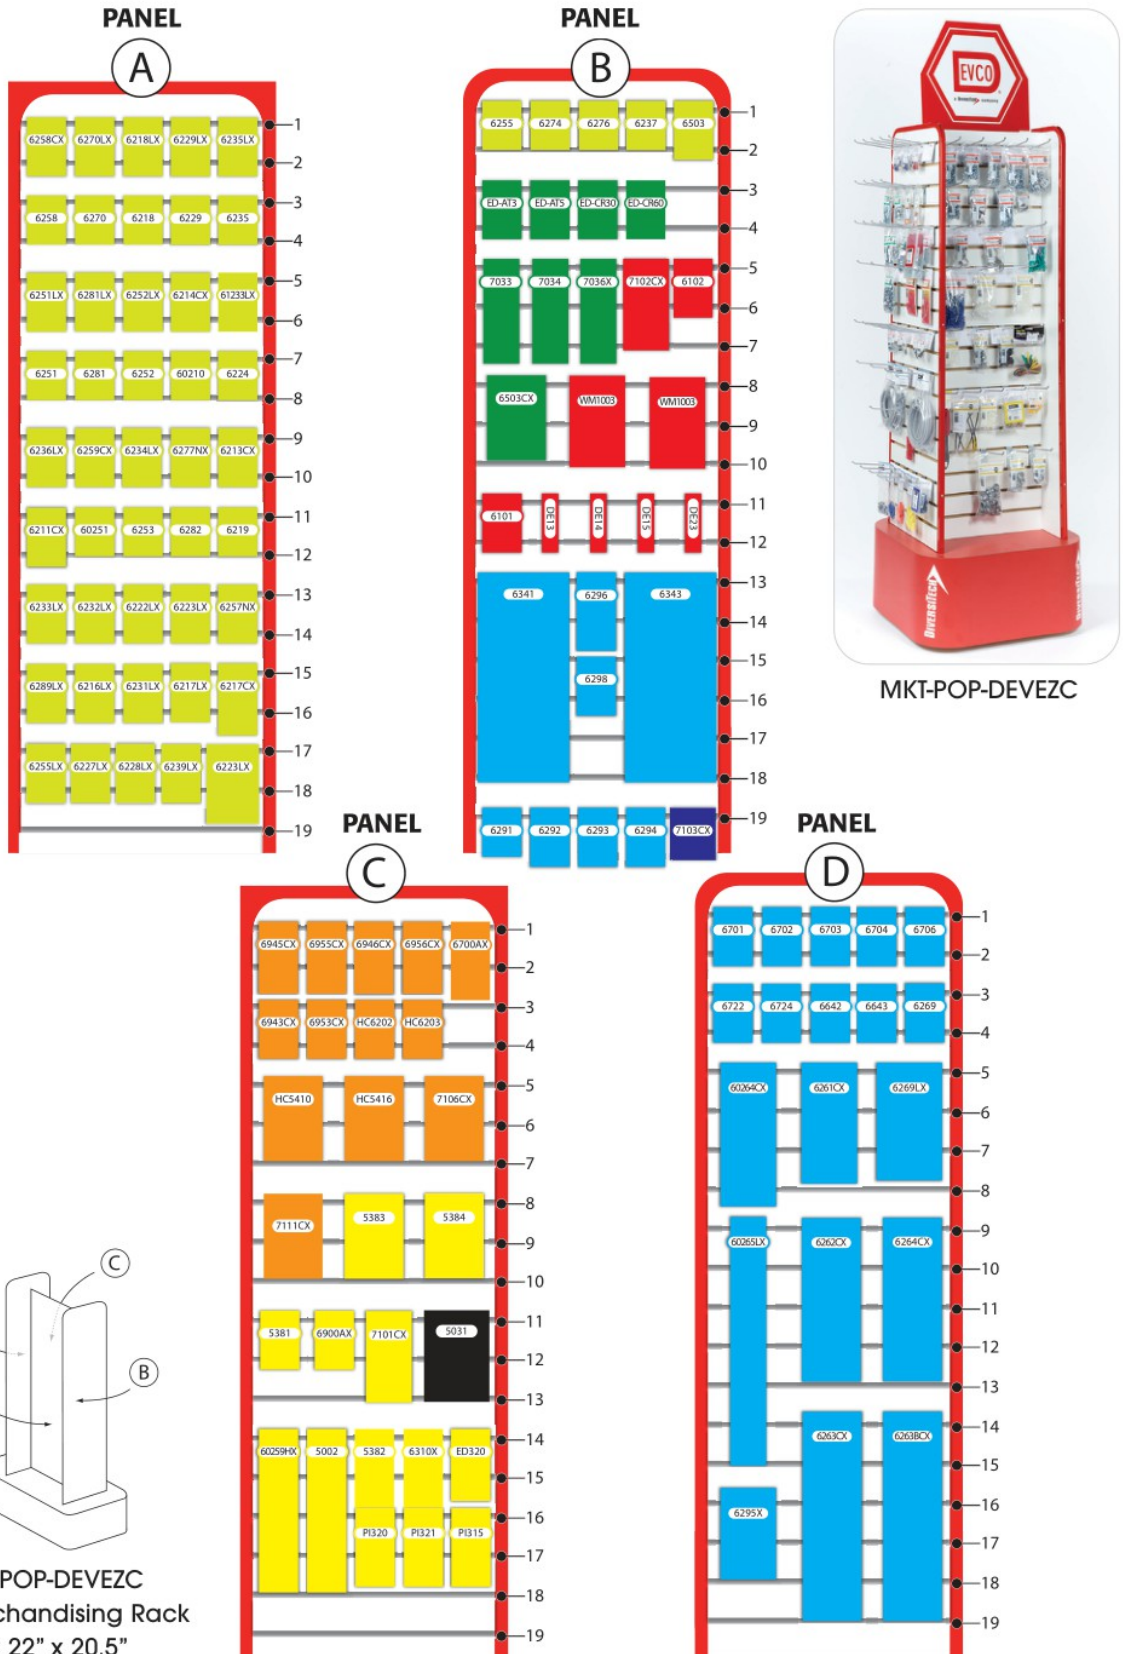


PLAN-O-GRAM FOR DEVCO COMBO RACK (MKT-POP-DEVCOMBO)

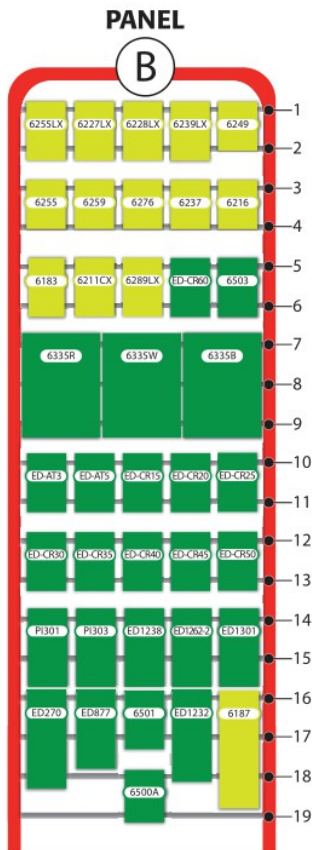
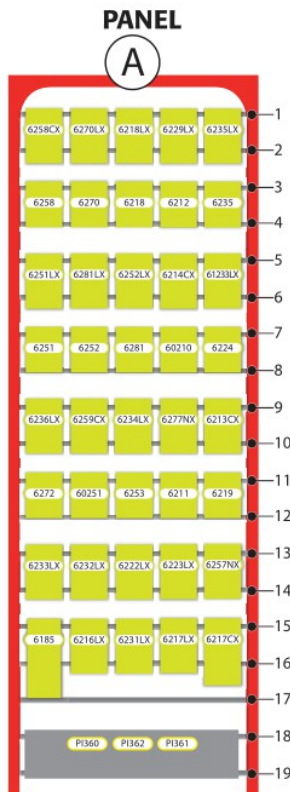


MKT-POP-DEVCOMBO

PANEL C

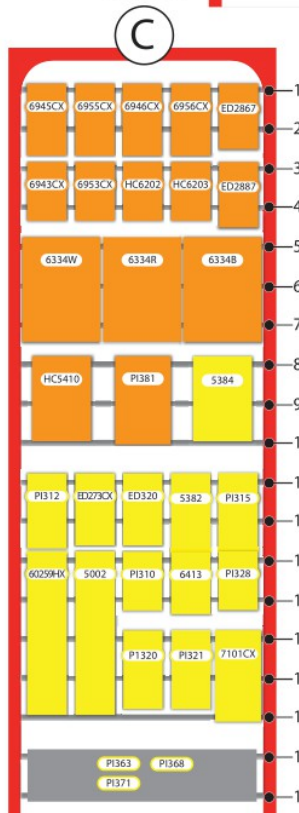

PANEL D

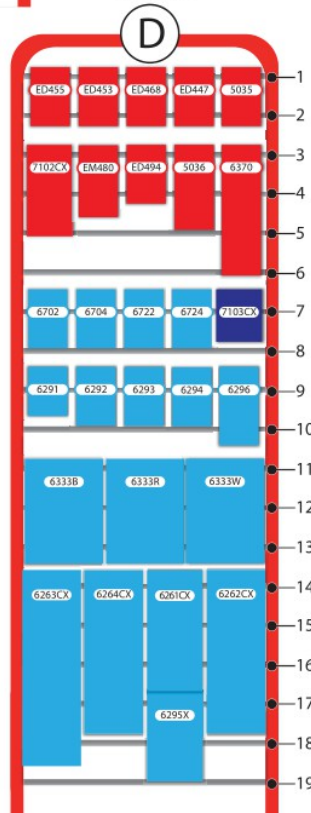

MKT-POP-DEVCOMBO Merchandising Rack 72" x 22" x 20.5"

DEVCO RACKS MASTER ITEM LIST (BY RACK)

This DEVCO product list includes any DEVCO item that is part of the plan-o-gram display for either the EZC, ELEC or COMBO versions of the DEVCO rack. This cross reference indicates on which display rack each item should be placed.

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
5002	Crimp Tool w/ Cutter & Stripper Ins.		X	X
5031	Test Leads (ins. Alligator clips) Low Voltage 22in 8pcs	X	X	
5033	Alligator Clips (steel) 2in long for probes .075in-.08in	X		
5035	Alligator Clips (copper) B&R Ins 2in long	X		X
5036	Test Clip (steel 20A) B&R Insulators 2-7/16in long	X		X
5041	Test Leads Low Voltage Hook Ty22ga 36in red & black	X		
5223	Triple Outlet 2 Pole 3 Wire 15A-125V Polarized plastic	X		
5381	Nylon Cable Clamp 1/8in I.D.		X	
5382	Nylon Cable Clamp 1/4in I.D.		X	X
5383	Nylon Cable Clamp 3/8in I.D.		X	
5384	Nylon Cable Clamp 1/2in I.D.		X	X
6900AX	Self-Drilling Screw Repair Kit		X	
6101	Motor Shaft Keys (1/8in 3/16in 1/4in 3/16in x 1/4in) zn Pltd.		X	
6102	Motor Shaft Keys (1/4insq 5/16insq 3/8insq) zn Pltd.		X	
6183	Terminal Block 20A-250V 6 pos			X
6185	Terminal Block 20A-250V 10 pos			X
6187	Terminal Block 20A-250V 14 pos			X
6211	Tab Ad. S. F Dbl M .250 Non-Ins.			X
6212	Dbl. M. Tab Ad. .S. F. Non-Ins.			X
6216	Ring 16-14 Ins. #10 Stud			X
6218	Slip-on F 16-14 Ins. .250		X	X
6219	Slip-on M 16-14 Ins. .250		X	X
6224	Flag F QD 12-10 Non-Ins. .250		X	X
6229	Slip-on F 16-14 Full Ins. .250		X	
6235	Slip-on F 22-18 Ins. .250		X	X
6237	Spade 22-18 Ins. #8 Stud		X	X
6249	M Tab 1 pair bent 90 Non-Ins.			X
6251	Slip-on F 12-10 Ins. .250		X	X
6252	Ring 12-10 Ins. #10 Stud		X	X
6253	Ring 12-10 Ins. 1/4in Stud		X	X
6255	Spade 12-10 Ins. #10 Stud		X	X
6258	Comp. Flag F. 16-14 Non-Ins. .250		X	X
6259	Comp. Flag F. 12-10 Non-Ins. .250			X
6269	Cable Tie Mount		X	
6270	Comp. Flag F. 12-8 Non-Ins. .250		X	X
6272	Ring 16-14 Ins. #6 Stud			X
6274	Spade 16-14 Ins. #6 Stud		X	
6276	Spr. Spade 16-14 Ins. #6 Stud		X	X
6281	Slip-on F 16-14 Ins. .187		X	X
6282	Slip-on F 22-18 Ins. .187		X	
6291	Wire Connector Mini-Gray		X	X
6292	Wire Connector Tiny-Blue		X	X
6293	Wire Connector Small-Orange		X	X
6294	Wire Connector Medium-Yellow		X	X
6296	Wire Connector Large-Red		X	X
6298	Wire Connector XLarge-Gray		X	
6336	Thermostat Wire 3 Conduct. 40 ft.	X		
6337	Thermostat Wire 5 Conduct. 40 ft.	X		
6341	SJTO Service Cord 16 GA 20 ft.	X	X	
6343	SJTO Service Cord 14 GA 20 ft.	X	X	
6370	Heat Shrink Tubing Assort. B&W 1/8in & 1/4in supplied 6in	X		X
6413	Fin. Hex Nut 1/4in-20 zn Pltd.			X
6501	Fin. Hex Nut 1/4in-20 zn Pltd.		X	X
6503	Fin. Hex Nut 3/8in-16 zn Pltd.		X	X
6642	HH Cap Screw 3/8in-16 x 1in		X	
6643	HH Cap Screw 3/8in-16 x 1 1/2in		X	
6701	Flat Washer 3/16in Uss zn Pltd.		X	
6702	Flat Washer 1/4in Uss zn Pltd.		X	X

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
6703	Flat Washer 5/16in Uss zn Pltd.		X	
6704	Flat Washer 3/8in Uss zn Pltd.		X	X
6706	Flat Washer 1/2in Uss zn Pltd.		X	
6722	Fender Washer 1/4in zn Pltd.		X	X
6724	Fender Washer 3/8in zn Pltd.		X	X
7033	Toggle Bolt w/wing 3/16inx4inzn Pltd.		X	
7034	Toggle Bolt w/wing 1/4inx4in zn Pltd.		X	
60210	Tab Ad. Ins. .250 16-14 multi stack male & female		X	X
60251	Slip-On F 12-10 Non-Ins. .250		X	X
60259HX	Comp. Lead Kit 12in 10ga wire		X	X
60264CX	Cable Tie 6in w/ #8 Hole 30# 1-3/8in B. Dia nat 100/PK		X	
60265LX	Cable Tie 14in 50# 4in B. Dia natural 50 pcs		X	
61233LX	Slip-on M & F 16-14 .250 Full Ins Nylon 50 pcs		X	X
6211CX	Tab Ad. S. F Dbl M Non-Ins. 100 pcs		X	X
6213CX	Flag F QD 16-14 Non-Ins. .250 100 pcs		X	X
6214CX	Slip-on F 16-14 Non-Ins. .250 100 pcs		X	X
6216LX	Ring 16-14 Ins. #10 Stud 50 pcs		X	X
6217CX	Butt Conn. 16-14 Ins. 100 pcs		X	X
6217LX	Butt Conn. 16-14 Ins. 50 pcs		X	X
6218LX	Slip-on F 16-14 Ins. .250 50 pcs		X	X
6222LX	Dead End Conn. 22-14 Fully Ins. 50 pcs		X	X
6223LX	Dead End Conn. 18-10 Fully Ins. 50 pcs		X	X
6227LX	Spade 16-14 Ins. #8 Stud		X	X
6228LX	Spade 16-14 Ins. #10 Stud 50 pcs		X	X
6229LX	Slip-on F 16-14 Full Ins. .250		X	X
6231LX	Butt Conn. 12-10 Ins. 50 pcs		X	X
6232LX	Butt Conn. 22-18 Ins. 50 pcs		X	X
6233LX	Slip-on F 16-14 .250 Full Ins. Nylon 50 pcs		X	X
6234LX	Slip-on M 16-14 .250 Full Ins. Nylon 50 pcs		X	X
6235LX	Slip-on F 22-18 Ins. .250 50 pcs		X	X
6236LX	Ring 22-18 Ins. #8 Stud 50 pcs		X	X
6239LX	Spr. Spade 16-14 Ins. #8 Stud		X	X
6251LX	Slip-on F 12-10 Ins. .250		X	X
6252LX	Ring 12-10 Ins. #10 Stud		X	X
6255LX	Spade 12-10 Ins. #10 Stud 50 pcs		X	X
6257NX	Ring #8 Ins. 1/4in Stud 25 pc		X	X
6258CX	Comp. Flag F. 16-14 Non-Ins. .250 100 pcs		X	X
6259CX	Comp. Flag F. 12-10 Non-Ins. .250 100 pcs		X	X
6261CX	Cable Tie 6in 18# 1-3/8in B. Dia natural 100 pcs		X	X
6262CX	Cable Tie 7-1/2in 50# 1-3/4in B. Dia natural 100 pcs		X	X
6263CX	Cable Tie 11in 50# 3in B. Dia natural 100 pcs		X	X
6263BCX	Cable Tie 11in 50# 3in B. Dia black 100 pcs		X	
6264CX	Cable Tie 7in w/ #10 Hole 50# 1-3/4in B. Dia nat 100/PK		X	X
6269LX	Cable Tie Mount 50 pcs		X	
6270LX	Comp. Flag F. 12-8 Non-Ins. .250 50 pcs		X	X
6277NX	Flag F QD 16-14 .250 Fully Ins. Nylon 25 pcs		X	X
6281LX	Slip-on F 16-14 Ins. .187 50 pcs		X	X
6289LX	Bullet Plug & Rec. 16-14 Ins. 50 pcs		X	X
6295X	Assorted Wire Connectors		X	X
6310X	Grease Fitting Assortment box		X	
6332B	Hook-up Wire 16ga blk. 48 ft		X	
6332R	Hook-up Wire 16ga red. 48 ft		X	
6332W	Hook-up Wire 16ga wht. 48 ft		X	
6333B	Hook-up Wire 14ga blk. 48 ft			X
6333G	Hook-up Wire 14ga grn. 48 ft			
6333R	Hook-up Wire 14ga red. 48 ft			X
6333W	Hook-up Wire 14ga wht. 48 ft			X
6334B	Hook-up Wire 12ga blk. 48 ft			X

continued

DEVCO RACKS MASTER ITEM LIST (BY RACK) cont'd

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
6334R	Hook-up Wire 12ga red 48 ft	X		X
6334W	Hook-up Wire 12ga wht. 48 ft			X
6335B	Hook-up Wire 10ga blk. 48 ft	X		X
6335R	Hook-up Wire 10ga red 48 ft	X		X
6335W	Hook-up Wire 10ga wht. 48 ft	X		X
6500A	Asst Mach. Screw Hex Nuts 6-32 8-32 10-32 zn Pltd.			X
6503CX	Fin. Hex Nut 3/8in-16 zn Pltd. 100 pcs		X	
6700AX	Flat Washer Assortment Pack 3/16 1/4 5/16 3/8 1/2 5/8 inch		X	
6943CX	Self Drilling Screw #8x1/2in 1/4in Hex Head zn Pltd. 100/PK		X	X
6945CX	Self Drilling Screw #8x3/4in 1/4in Hex Head zn Pltd. 100/PK		X	X
6946CX	Self Drilling Screw #8x1in 1/4in Hex Head zn Pltd. 100/PK		X	X
6953CX	Drill Tip Screw #10x1/2in 5/16in Hex Head 100/PK		X	X
6955CX	Drill Tip Screw #10x3/4in 5/16in Hex Head 100/PK		X	X
6956CX	Self Drilling Screw #10x1in 5/16in Hex Head zn Pltd. 100/PK		X	X
7036X	Toggle Bolt w/wing 3/8inx4in zn Pltd.		X	
7101CX	Anch Kit Yellow #8x1in w 3/16in bit 100 s + 100 a		X	X
7102CX	Anch Kit Red #10x1-1/4in w 1/4in bit 100 s + 100 a		X	X
7103CX	Anch Kit Blue #4x3/4in w 5/32in bit 100 s + 100 a		X	X
7106CX	Plug Anchor Kit Green #10x1in 1/4in bit 100 s +100 a bag		X	
7111CX	Plug Anchor Kit Blue #14x1in w 5/16in bit 100 s +100 a bag		X	
DE13	Magnetic Hex Chuck 1/4in x 1-3/4in		X	
DE14	Magnetic Hex Chuck 5/16in x 1-3/4in		X	
DE15	Magnetic Hex Chuck 3/8in x 1-7/8 in		X	
DE23	Magnetic Hex Chuck 1/4in x 2-9/16 in		X	
ED1232	Toggle Switch D.P. 30A-120/277V brown			X
ED1238	Toggle Switch S.P. 20A-120/277V brown			X
ED1240-2	Toggle Switch S.P. 15A-120/277V brown	X		
ED1262-2	Toggle Switch D.P. 15A-120/277V brown			X
ED1301	Toggle Switch S.P. 15A-120V brown	X		X
ED1876	Single Receptacle 20A-250V 2 pl. 3 wr. brown	X		
ED1876-I	Single Receptacle 20A-250V 2 pl. 3 wr. ivory	X		
ED270	Duplex Receptacle 15A-125V 2 pl. 3 wr. brown			X
ED270-I	Duplex Receptacle 15A-125V 2 pl. 3 wr. ivory	X		
ED273CX	Electrical Staple insul size #5 5/8in x 1/4in 100/PK	X		X
ED2867	Armored Plug 15A-125V 2pl. 3 wr. vinyl enclosed			X
ED2887	Armored Connector 15A-125V 2pl. 3 wr. vinyl enclosed			X
ED320	Vinyl Grommet Asst. contains: ED300 thru ED316	X	X	X
ED447	Bat Handle Switch metal SPST on-off 10A/277V-20A/125V AC	X		X
ED453	Bat Handle Switch metal DPDT on-on 10A/277V-20A/125V AC	X		X
ED454	Bat Handle Switch metal SPDT on-on 10A/277V-20A/125V AC	X		
ED455	Bat Handle Switch metal DPST on-off 10A/277V-20A/125V AC	X		X
ED468	Bat Handle Switch metal SPDT on-off-on 10A/277V-20A/125V	X		X
ED494	Bat Handle Switch metal DPDT on-off-on 10A/277V-20A/125V	X		X
ED5225	Switch & Receptacle 2p 3w (sw.15A-120VAC& rec.15A-125VAC) brn	X		
ED600	Indicator Light 28V red PC lens incandescent bulb	X		
ED601	Indicator Light 28V green PC lens incandescent bulb	X		
ED602	Indicator Light 28V amber PC lens incandescent bulb	X		
ED610	Indicator Light 105-125V AC red nylon lens neon bulb	X		
ED611	Indicator Light 105-125V AC gm PC lensneon blb-G2B Imp&resstr	X		
ED877	Duplex Receptacle 20A-125V 2 pl. 3 wr. brown			X
EM480	In-Line Fuse Holder 1-1/4 x 1/4in fuses to 20A/32V 14ga	X		X
ED-AT3	Blade Fuses - 3 Amp - Purple, Pack of 10	X	X	X
ED-AT5	Blade Fuses - 5 Amp - Tan, Pack of 10	X	X	X
ED-CR15	Dual Element Fuses - 15 Amp, Pack of 2	X		X
ED-CR20	Dual Element Fuses - 20 Amp, Pack of 2	X		X
ED-CR25	Dual Element Fuses - 25 Amp, Pack of 2	X		X
ED-CR30	Dual Element Fuses - 30 Amp, Pack of 2	X	X	X
ED-CR35	Dual Element Fuses - 35 Amp, Pack of 2	X		X
ED-CR40	Dual Element Fuses - 40 Amp, Pack of 2	X		X
ED-CR45	Dual Element Fuses - 45 Amp, Pack of 2	X		X

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
ED-CR50	Dual Element Fuses - 50 Amp, Pack of 2	X		X
ED-CR60	Dual Element Fuses - 60 Amp, Pack of 2	X	X	X
HC5410	Hose Clamp 9/16in-1-1/8in SShousing&band st hex screw		X	X
HC5416	Hose Clamp 3/4in-1-1/2in SShousing&band st hex screw		X	
HC6202	Hose Clamp 1/4in-5/8in SS housing&band st hex screw		X	X
HC6203	Hose Clamp 5/16in-7/8in SShousing&band st hex screw		X	X
PI301	Cond Nip 1/2in offset zn w pltd. stl locknuts insul. bushings			X
PI303	Cond Nip 1/2in strl galv steel w pltd. stl lock insul.			X
PI310	Reduc. Wash 3/4in to 1/2in Rsd Fin Galv Stl			X
PI312	BX Conct set screw 3/8in Tr. 1/2in KO. zn die cast			X
PI315	BX Connector 90 3/8inTr. 1/2in KO zn die cast	X	X	X
PI316	Knockout Seal for 1/2in KO zn Pltd. steel	X		
PI319	Romex Connector 3/4in Tr. 3/4in KO. zn Pltd. die cast	X		
PI320	Romex Connector 3/8in Tr. 1/2in KO. zn Pltd. die cast 25/PK	X	X	X
PI321	Romex Connector 3/8in Tr. 1/2 in KO. zn Pltd. die cast	X	X	X
PI322	BX Conct str sqze 3/8in Tr. 1/2in KO. zn die cast	X		
PI328	Split Bolt Connector Cu use (6 max sol & 7 max strnd)			X
PI330	Romex Stap plastic 3/8inx1/2in for 2 cond. romex 12/2-14/2	X		
PI331	Plastic in Anti-Shortin Bush 14/2 14/3 & 12/2 BX cable	X		
PI340	Combo Cable Connector for romex & BX 3/8in Tr. 1/2in KO	X		
PI350	Metal LT Conn straight 1/2in Tr. 1/2in K.O	X		
PI351	Metal LT Conn straight 3/4in Tr. 3/4in K.O.	X		
PI352	Liquid Tight Connector 90 1/2in Tr. 1/2in K.O. zn die cast	X		
PI353	Liquid Tight Connector 90 3/4in Tr. 3/4in K.O. zn die cast	X		
PI360	Box galv. steel 4in x 2-1/8inx 1-7/8in 1/2in KO 13 in³	X		X
PI361	Box galv. steel 4in x 2-1/8inx 2-1/8in 1/2in KO 14.5 in³	X		X
PI362	1900 Box galv. steel 4X4X1-1/2 1/2&3/4 KO 21 in³	X		X
PI363	1900 Box galv. steel 4X4X2-1/8in 1/2&3/4 KO 30.3 in³	X		X
PI365	Utility Cover Toggle Switch 2-11/32in x 4-1/4in Pltd. steel	X		
PI368	1900 Cover Sw/Dup Rec cad fin. steel 4in x 4in raisd 1/2in	X		X
PI371	1900 Cover Blank Flat galv. steel	X		X
PI378	1900 Cover Duplex Recep cadil fin. steel 4X4 raisd 1/2in	X		
PI381	Fuse Outlet & Switch w cover 1/2HP-125V AC galv. steel			X
PI382	Weatherproof Cover Blank Al 1 Gang w gasket anodized	X		
PI385	Wlthprf Box AL2-3/4inx4-1/2inx23 1/2in holes 2 plugs 19in³	X		
WM1002	Cable Marker Book alpha numer	X		
WM1003	Cable Marker Book numeric contains 10 each: 1 - 45	X	X	
WM1009	Cable Marker Book line & term	X		



NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

diversitech.com

SLIP-ON SOLDERLESS TERMINALS

Insulated Male Slip-Ons

These male terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
60219	Insulated Male Slip-On, pack of 23	22-18	.250	PK	1
60220	Insulated Male Slip-On, pack of 23	16-14	.187	PK	1
60220LX	Insulated Male Slip-On, pack of 50	16-14	.187	PK	1
6219	Insulated Male Slip-On, pack of 22	16-14	.250	PK	1
6219LX	Insulated Male Slip-On, pack of 50	16-14	.250	PK	1
61221LX	Insulated Male Slip-On, pack of 50	12-10	.250	PK	1
61221CX	Insulated Male Slip-On, pack of 100	12-10	.250	PK	1

Insulated Female Slip-Ons

These female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6282	Insulated Female Slip-On, pack of 22	22-18	.187	PK	1
6282LX	Insulated Female Slip-On, pack of 50	22-18	.187	PK	1
6235	Insulated Female Slip-On, pack of 22	22-18	.250	PK	1
6235LX	Insulated Female Slip-On, pack of 50	22-18	.250	PK	1
6235CX	Insulated Female Slip-On, pack of 100	22-18	.250	PK	1
6281	Insulated Female Slip-On, pack of 22	16-14	.187	PK	1
6281LX	Insulated Female Slip-On, pack of 50	16-14	.187	PK	1
6218	Insulated Female Slip-On, pack of 22	16-14	.250	PK	1
6218LX	Insulated Female Slip-On, pack of 50	16-14	.250	PK	1
6218CX	Insulated Female Slip-On, pack of 100	16-14	.250	PK	1
6251	Insulated Female Slip-On, pack of 17	12-10	.250	PK	1
6251LX	Insulated Female Slip-On, pack of 50	12-10	.250	PK	1
6251CX	Insulated Female Slip-On, pack of 100	12-10	.250	PK	1
61223LX	Insulated Female Slip-On, pack of 50	12-10	.340	PK	1

Fully Insulated Female Slip-Ons

These female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon. This terminal features insulation grip. This terminal is usually supplied vinyl and has an insulation grip.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6229**	Fully Insulated Female Slip-On, pack of 11	16-14	.250	PK	1
6229LX**	Fully Insulated Female Slip-On, pack of 50	16-14	.250	PK	1
6233	Fully Insulated Female Slip-On, pack of 14	16-14	.250	PK	1
6233LX	Fully Insulated Female Slip-On, pack of 50	16-14	.250	PK	1
61234LX	Fully Insulated Female Slip-On, pack of 50	12-10	.250	PK	1

* This terminal features insulation grip.
 ** This terminal is usually supplied vinyl and has an insulation grip.

Non-Insulated Male Slip-Ons

These non insulated male terminals crimp to the wires which relieves the need to solder. A variety of sizes are available



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6220	Non-Insulated Male Slip-On, pack of 38	16-14	.250	PK	1
6220CX	Non-Insulated Male Slip-On, pack of 100	16-14	.250	PK	1
61220	Non-Insulated Male Slip-On, pack of 37	16-14	.250	PK	1

Non-Insulated Female Slip-Ons

These non insulated female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available. This terminal features insulation grip.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6214	Non-Insulated Female Slip-On, pack of 35	16-14	.250	PK	1
6214CX	Non-Insulated Female Slip-On, pack of 100	16-14	.250	PK	1
60251	Non-Insulated Female Slip-On, pack of 26	12-10	.250	PK	1
60251CX	Non-Insulated Female Slip-On, pack of 100	12-10	.250	PK	1

* This terminal features insulation grip.

Fully Insulated Male Slip-Ons

These male terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6234	Fully Insulated Male Slip-On, pack of 14	16-14	.250	PK	1
6234LX	Fully Insulated Male Slip-On, pack of 50	16-14	.250	PK	1
61235LX	Fully Insulated Male Slip-On, pack of 50	12-10	.250	PK	1

Non-Insulated Flag Female Slip-Ons

These non insulated female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available. Part 6213 features insulation grip.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6213	Non-Insulated Flag Female Slip-On, pack of 34	16-14	.250	PK	1
6213CX	Non-Insulated Flag Female Slip-On, pack of 100	16-14	.250	PK	1
6224	Non-Insulated Flag Female Slip-On, pack of 20	12-10	.250	PK	1
6224CX	Non-Insulated Flag Female Slip-On, pack of 100	12-10	.250	PK	1

SLIP-ON SOLDERLESS TERMINALS cont'd

Fully Insulated Flag Female Slip-Ons

These female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip-ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6277	Fully Insulated Flag Female Slip-On, pack of 9	16-14	.250	PK	1
6277NX	Fully Insulated Flag Female Slip-On, pack of 25	16-14	.250	PK	1

Combination Pack: Set of 6233 and 6234

Our Combination pack holds both a Fully Insulated Male and Female Slip On.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
61233LX	Set of Fully Insulated M/F Slip-Ons, pack of 25 pairs	16-14	.250	PK	1

Flag Female Compressor Terminal Kit

Parts 6258, 6271, 6259, 6273, 6270 in a four compartment, clear plastic box. Parts 6270 and 6273 are put in the same compartment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6200HX	Flag Female Compressor Terminal Kit	EA	1

Flag Female Compressor Terminals

Also known as hermetic header terminals, these non-insulated terminals are designed with a larger distance between the "rolls" to allow for the rod in hermetic header applications. The increased distance allows the rod to slip in between them. Parts 6258 and 6259 are notched for bending. The notches are cut between the slip-on portion and the conductor barrel and enable the back of the slip-on portion to be folded against the conductor barrel after the wire connection is made. This terminal features insulation grip.



CATALOG NO.	DESCRIPTION	WIRE RANGE	FITS	UOM	ORDER MULTIPLE
6270	Flag Female Compressor Terminal, pack of 9	12-8	.250 tab	PK	1
6270LX	Flag Female Compressor Terminal, pack of 50	12-8	.250 tab	PK	1
6258*	Flag Female Compressor Terminal, pack of 17	16-14	.250 tab	PK	1
6258CX*	Flag Female Compressor Terminal, pack of 100	16-14	.250 tab	PK	1
6259	Flag Female Compressor Terminal, pack of 14	12-10	.250 tab	PK	1
6259CX	Flag Female Compressor Terminal, pack of 100	12-10	.250 tab	PK	1

* This terminal features insulation grip.

Compressor Lead Kit

Our Compressor Lead kit includes the following products: a flag female compressor terminal (.250 tab; part 62589), a waterproof butt connector (12 10 wire range; part 62231), and a piece of 10 gauge wire.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
60259HX	Compressor Lead Kit with 12" wire	EA	1

SPECIAL PURPOSE SOLDERLESS TERMINALS

Insulated Plugs

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6283LX	Insulated Plugs, pack of 50	22-18	PK	1
6285	Insulated Plugs, pack of 17	16-14	PK	1
6285LX	Insulated Plugs, pack of 50	16-14	PK	1

Combination Packs

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6288	Combination Pack with parts 6283 and 6284, pack of 7 pairs	PK	1
6288LX	Combination Pack with parts 6283 and 6284, pack of 25 pairs	PK	1
6289	Combination Pack with parts 6285 and 6286, pack of 7 pairs	PK	1
6289LX	Combination Pack with parts 6285 and 6286, pack of 25 pairs	PK	1

Fully Insulated Receptacles

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6286	Fully Insulated Receptacles, pack of 12	16-14	PK	1

SPECIAL PURPOSE SOLDERLESS TERMINALS cont'd

Tab Adapters – Quick Disconnect with Screw

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6209	Fits .250 Tab, #6-32 x 1/4" Screw, pack of 5		PK	1
6209LX	Fits .250 Tab, #6-32 x 1/4" Screw, pack of 50		PK	1

Tab Adapters – Piggy Back Slip-Ons

These insulated terminals crimp to the wires which relieves the need to solder. Multi-stack, .250 male tab, .250 female slip-on.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6210	Non-Insulated Piggy Back Slip-Ons, pack of 20	16-14	PK	1
62010	Insulated Piggy Back Slip-Ons, pack of 11	16-14	PK	1
62010LX	Insulated Piggy Back Slip-Ons, pack of 50	16-14	PK	1
62010CX	Insulated Piggy Back Slip-Ons, pack of 100	16-14	PK	1

Tab Adapters – Single Female Double Male Tabs

These insulated terminals crimp to the wires which relieves the need to solder. .250 male, .250 female.



CATALOG NO.	DESCRIPTION	TAB SIZE	UOM	ORDER MULTIPLE
6208	Tab Adapter; 1 female, 2 male; Bent 90°, pack of 12	.250	PK	1
6208LX	Tab Adapter; 1 female, 2 male; Bent 90°, pack of 50	.250	PK	1
6211	Tab Adapter; 1 female, 2 male; Wye, pack of 27	.250	PK	1
6211CX	Tab Adapter; 1 female, 2 male; Wye, pack of 100	.250	PK	1
6212	Tab Adapter; 1 female, 2 male; Stacked, pack of 16	.250	PK	1
6212CX	Tab Adapter; 1 female, 2 male; Stacked, pack of 100	.250	PK	1

Tab Adapters – Male Tabs

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	TAB SIZE	STUD	UOM	ORDER MULTIPLE
6230	Male Tabs – Straight, pack of 28	.250	#8	PK	1
6230CX	Male Tabs – Straight, pack of 100	.250	#8	PK	1

Tap Connectors

These insulated terminals crimp to the wires which relieves the need to solder. Designed to make tap splices.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6241	Tap Splice – blue, pack of 15	16-14	PK	1

Fully Insulated Dead End Connectors

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6222	Fully Insulated Dead End Connectors, pack of 27	22-14	PK	1
6222LX	Fully Insulated Dead End Connectors, pack of 50	22-14	PK	1
6223	Fully Insulated Dead End Connectors, pack of 21	18-10	PK	1
6223LX	Fully Insulated Dead End Connectors, pack of 50	18-10	PK	1

STANDARD SOLDERLESS TERMINALS

Insulated Hooks

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
6242	Insulated Hooks, pack of 22	22-18	#8	PK	1
6242LX	Insulated Hooks, pack of 50	22-18	#8	PK	1
6244	Insulated Hooks, pack of 20	16-14	#8	PK	1
6244LX	Insulated Hooks, pack of 50	16-14	#8	PK	1

Insulated Butt Connectors

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6232	Insulated Butt Connector, pack of 26	22-18	PK	1
6232LX	Insulated Butt Connector, pack of 50	22-18	PK	1
6232CX	Insulated Butt Connector, pack of 100	22-18	PK	1
6217	Insulated Butt Connector, pack of 27	16-14	PK	1
6217LX	Insulated Butt Connector, pack of 50	16-14	PK	1
6217CX	Insulated Butt Connector, pack of 100	16-14	PK	1
6231	Insulated Butt Connector, pack of 16	12-10	PK	1
6231LX	Insulated Butt Connector, pack of 50	12-10	PK	1
6231CX	Insulated Butt Connector, pack of 100	12-10	PK	1
6287XX	Insulated Butt Connector, pack of 10	8	PK	1
6287CX	Insulated Butt Connector, pack of 100	8	PK	1

STANDARD SOLDERLESS TERMINALS cont'd

Butt Connector Assortment Kit

This Assortment is a perfect addition to the HVAC kit. It includes an Insulated Butt Connector, a Non Insulated Butt Connector, and a Nylon Insulated Butt Connector. Includes parts 6217, 6231, and 6232.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6200BSX	Butt Connector Assortment Kit	EA	1

Insulated Spades

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
61214	Insulated Spades, pack of 23	22-18	#6	PK	1
6237	Insulated Spades, pack of 22	22-18	#8	PK	1
6237LX	Insulated Spades, pack of 50	22-18	#8	PK	1
61256LX	Insulated Spades, pack of 50	22-18	#10	PK	1
6274	Insulated Spades, pack of 22	16-14	#6	PK	1
6274LX	Insulated Spades, pack of 50	16-14	#6	PK	1
6227	Insulated Spades, pack of 22	16-14	#8	PK	1
6227LX	Insulated Spades, pack of 50	16-14	#8	PK	1
6228	Insulated Spades, pack of 22	16-14	#10	PK	1
6228LX	Insulated Spades, pack of 50	16-14	#10	PK	1
60254	Insulated Spades, pack of 18	12-10	#8	PK	1
60254LX	Insulated Spades, pack of 50	12-10	#8	PK	1
60254CX	Insulated Spades, pack of 100	12-10	#8	PK	1
6255	Insulated Spades, pack of 17	12-10	#10	PK	1
6255LX	Insulated Spades, pack of 50	12-10	#10	PK	1
6255CX	Insulated Spades, pack of 100	12-10	#10	PK	1

Non-Insulated Rings

These non insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
6215	Non-Insulated Rings, pack of 27	16-14	#8	PK	1

Non-Insulated Spades

These non insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
6226CX	Non-Insulated Spades, pack of 100	16-14	#10	PK	1

Insulated Spring Spades

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
6238	Insulated Spring Spades, pack of 22	22-18	#8	PK	1
6238LX	Insulated Spring Spades, pack of 50	22-18	#8	PK	1
6276	Insulated Spring Spades, pack of 21	16-14	#6	PK	1
6276LX	Insulated Spring Spades, pack of 50	16-14	#6	PK	1
6239	Insulated Spring Spades, pack of 22	16-14	#8	PK	1
6239LX	Insulated Spring Spades, pack of 50	16-14	#8	PK	1
60256CX	Insulated Spring Spades, pack of 100	12-10	#8	PK	1

Insulated Rings

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
61202	Insulated Rings, pack of 22	22-18	#6	PK	1
6236LX	Insulated Rings, pack of 50	22-18	#8	PK	1
6272	Insulated Rings, pack of 22	16-14	#6	PK	1
6216	Insulated Rings, pack of 23	16-14	#10	PK	1
6216LX	Insulated Rings, pack of 50	16-14	#10	PK	1
6216CX	Insulated Rings, pack of 100	16-14	#10	PK	1
60247	Insulated Rings, pack of 17	12-10	#6	PK	1
60252CX	Insulated Rings, pack of 100	12-10	#8	PK	1
6252	Insulated Rings, pack of 17	12-10	#10	PK	1
6252LX	Insulated Rings, pack of 50	12-10	#10	PK	1
6253LX	Insulated Rings, pack of 50	12-10	1/4"	PK	1
6253CX	Insulated Rings, pack of 100	12-10	1/4"	PK	1
6257	Insulated Rings, pack of 6	8	1/4"	PK	1
6257NX	Insulated Rings, pack of 25	8	1/4"	PK	1
61252NX	Insulated Rings, pack of 25	6	5/16"	PK	1

HIGH TEMPERATURE SOLDERLESS TERMINALS

High Temperature Male Slip-Ons

The High Temperature Male Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
4220	High Temp. Male Slip-Ons, pack of 21	16-14	.250	PK	1
4220CX	High Temp. Male Slip-Ons, pack of 100	16-14	.250	PK	1

High Temperature Flag Female Slip-Ons

The High Temperature Flag Female Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
4213	High Temp. Flag Female Slip-Ons, pack of 16	16-14	.250	PK	1
4213CX	High Temp. Flag Female Slip-Ons, pack of 100	16-14	.250	PK	1
4224	High Temp. Flag Female Slip-Ons, pack of 11	12-10	.250	PK	1
4224NX	High Temp. Flag Female Slip-Ons, pack of 25	12-10	.250	PK	1
4224CX	High Temp. Flag Female Slip-Ons, pack of 100	12-10	.250	PK	1

High Temperature Rings

The High Temperature Rings are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
4215	High Temp. Rings, pack of 21	16-14	#10	PK	1
4215CX	High Temp. Rings, pack of 100	16-14	#10	PK	1
4205CX	High Temp. Rings, pack of 100	16-14	1/4"	PK	1
4252	High Temp. Rings, pack of 14	12-10	#10	PK	1
4252CX	High Temp. Rings, pack of 100	12-10	#10	PK	1
4253	High Temp. Rings, pack of 14	12-10	1/4"	PK	1
4253CX	High Temp. Rings, pack of 100	12-10	1/4"	PK	1

High Temperature Female Slip-Ons

The High Temperature Female Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
4221	High Temp. Female Slip-Ons, pack of 20	16-14	.187	PK	1
4221CX	High Temp. Female Slip-Ons, pack of 100	16-14	.187	PK	1
4214	High Temp. Female Slip-Ons, pack of 21	16-14	.250	PK	1
4214CX	High Temp. Female Slip-Ons, pack of 100	16-14	.250	PK	1
4204	High Temp. Female Slip-Ons, pack of 17	12-10	.250	PK	1
4204CX	High Temp. Female Slip-Ons, pack of 100	12-10	.250	PK	1

High Temperature Spades

The High Temperature Spades Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
4226	High Temp. Spades, pack of 23	16-14	#10	PK	1
4226CX	High Temp. Spades, pack of 100	16-14	#10	PK	1
4254CX	High Temp. Spades, pack of 100	12-10	#10	PK	1

High Temperature Butt Connectors

The High Temperature Butt Connectors are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
4231	High Temp. Butt Connectors, pack of 17	12-10	PK	1


















High Temperature Assortment

The High Temperature Assortment Pack holds terminals that are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C). Includes parts 4213, 4215, and 4204, and 4254.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4200AX	High Temp. Assortment	EA	1

DEVCO TERMINAL KITS

CATALOG NO.	DESCRIPTION	TERMINALS																		
	NOTE: Some kits have parts not shown in chart. Please refer to the DESCRIPTION for these parts. Except where noted, kits come in clear plastic boxes.			HIGH TEMP																
6200HX	Flag Female Compressor Terminal Kit: 8-18 wire range in a 4-compartment box with parts 6270 and 6273 in the same compartment.													6258	6259	6270	6271	6273		
6200MX 6200MSX*	.187, .250 tabs; 12-10 wire range; #8, #10 studs in a 13-compartment polypropylene box.	6217	6218		6216					6213					6259					6211
6201MX	.187, .250 tabs; 22-10 wire range; #8, #10 studs in a 21-compartment metal box. (Includes parts 6233, 6234, and 6277, not shown in chart).	6217	6218		6216	6228	6238				6224			6258	6259					6211
6202MX	Insulated Terminal Kit: .187, .250 tabs; 22-10 wire range; #8, #10, #6, 1/4" studs in an 18-compartment box. Parts 6233 & 6234, and parts 6222 & 6223 are pairs (not shown in chart).	6217	6218		6216	60254	6238													
6203MX	Non-Insulated Terminal Kit: Includes High Temp. Terminals and Flag Female Compressor Terminals. .250 tab; 22-10 wire range; #8, #10 studs in an 18-compartment box. (Includes parts 6209 and 6210, not shown in chart).			4204					6214	6213	6224			6258	6259	6270	6230	6208	6211	
4200AX	High Temperature Terminal Kit: .250 tab; 16-10 wire; #10 stud in a bag.			4204																
6200X	.250 tab; 16-14 wire; #8 stud in a 6-compartment box.	6217							6214	6213		6215					6230		6211	
6200AX	.250 tab; 16-14 wire range; #8, #10 studs in a 6-compartment box.	6217	6218		6216					6213							6230		6211	
6200BSX	22-10 wire range in a bag.	6217	6231	6232																
6200CX	.250 tab; 16-14 wire; #10 stud in a 4-compartment box.		6218		6216					6213									6211	

*Contains a crimper.

ANCHORS

Metal Drive Anchors

The anchors offer a Quick and Easy Solution for Light Duty Anchoring Jobs in Concrete and Masonry and Easy through type fastening, even when used in bottomless holes



CATALOG NO.	DESCRIPTION	SIZE	EMBEDMENT	PULLOUT LOAD	UOM	ORDER MULTIPLE
7233RLX	Drive Anchor, pack of 50	1/4" X 3/4"	5/8"	500 lb.	PK	1
7234RLX	Drive Anchor, pack of 50	1/4" X 1"	7/8"	944 lb.	PK	1
7235RLX	Drive Anchor, pack of 50	1/4" X 1-1/4"	1-1/8"	1,146 lb.	PK	1
7236RLX	Drive Anchor, pack of 50	1/4" X 1-1/2"	1-3/8"	854 lb.	PK	1

Drive Fasteners

These steel fasteners can be driven into dry wall like a nail and are secured by turning the screw down completely to expand the ribs.



CATALOG NO.	DESCRIPTION	HOLE SIZE	GRIP RANGE	UOM	ORDER MULTIPLE
7302	Drive Fastener, pack of 6	1/4"	1/8" to 1/2"	PK	1
7303	Drive Fastener, pack of 6	1/4"	1/8" to 3/16"	PK	1

Drop-In Expansion Anchor Setting Tool

This tool is great for use while setting an anchor.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7146	For use with anchor part number 7142	EA	1

Drop-In Expansion Anchors

These heavy duty anchors are made of carbon steel. They are set by means of an internal plug and setting tool.



CATALOG NO.	DESCRIPTION	BOLT SIZE	THREADS PER INCH	HOLE DEPTH	THREAD DEPTH	DRILL BIT SIZE	UOM	ORDER MULTIPLE
7142	Anchor, pack of 4	3/8"	18	1-5/8"	1/2"	1/2"	PK	1
7142LX	Anchor, pack of 50	3/8"	18	1-5/8"	1/2"	1/2"	PK	1

Self-Drilling Gypsum Wallboard Anchors



























These anchors pre drill precise holes in gypsum wallboard with no special tools required. The anchors are easily installed with a #2 or #3 Phillips screwdriver, slotted driver, or power driver. Plastic plugs toggles and toggles are easily replaced with the deep threaded products. There is a full range to cover all wall fastening applications and are available in corrosion resistant and non conductive white nylon. The product has a low profile head and can easily be backed out. They provide and strong engagement in 3/4 in., 1/2 in., and 5/8 in. gypsum wallboard and are supplied with combo head screws.



CATALOG NO.	DESCRIPTION	SCREW SIZE	MAX. FIXTURE	UOM	ORDER MULTIPLE
7316X	E-Z Ancor [®] ; nylon, pack of 10	#8 x 1-1/4"	3/4"	PK	1
7316L	E-Z Ancor [®] ; nylon, pack of 50	#8 x 1-1/4"	3/4"	PK	1
7311L	E-Z Ancor [®] ; zinc die cast*, pack of 50	#6 x 1-1/4"	3/4"	PK	1
7317X	E-Z Ancor Lite [™] ; nylon, pack of 10	#6 x 1-1/4"	3/4"	PK	1
7317L	E-Z Ancor Lite [™] ; nylon, pack of 50	#6 x 1-1/4"	3/4"	PK	1
7321X	E-Z Toggle [™] ; zinc die cast; heavy-duty, pack of 10	#8 x 2-1/8"	5/8"	PK	1

*Smaller version of the E-Z Ancor[®] with a versatile core that can use #6 or #8 sheet metal screws or #6, #7, #8 drywall screws.

DEVCO PLASTIC ANCHOR KITS

CATALOG NO.		ANCHOR	DRILL SIZE	DRILL BIT INCLUDED	SCREW	SCREW SIZE	
SMALL PACK*	100 PACK						
	7103CX		<u>5/32</u> 			#4 x 3/4"	
	7101CX		<u>3/16</u> 			#8 x 1"	
	7101HCX					#8 x 1"	
	7102CX		<u>1/4</u> 			#10 x 1-1/4"	
	7102HCX					#10 x 1"	
	7106CX		<u>1/4</u> 			#10 x 1	
	7105LX		<u>5/16</u> 			#14 x 1-1/2"	
	7111X	7111CX		<u>5/16</u> 			#14 x 1"

*SMALL PACK COUNT
 7106 28
 7111X 40
 7105LX 50

BOXES, RINGS, AND COVERS

Steel Utility Boxes*

Steel Utility Boxes are used for convenience outlets, switch boxes and small junction boxes. Galvanized steel.



PI360

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	UOM	ORDER MULTIPLE
PI360	4"	2-1/8"	1-7/8"	13.0	1/2	EA	1
PI361	4"	2-1/8"	2-1/8"	14.5	1/2	EA	1

Steel 1900 Boxes*

Steel Utility Boxes are used for convenience outlets, switch boxes and small junction boxes. Galvanized steel.



PI362

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	UOM	ORDER MULTIPLE
PI362	4"	4"	1-1/2"	21.0	3/4 & 1/2	EA	1
PI363	4"	4"	2-1/8"	30.3	3/4 & 1/2	EA	1

Device Rings*

Device rings are designed for projects of preexisting locations. They can help narrow an opening for a box in the sheet rock. They are also known as Plaster Rings. Galvanized steel.



PI387

CATALOG NO.	DESCRIPTION	NUMBER DEVICES	RAISED	UOM	ORDER MULTIPLE
PI387	1900 Device Ring	1	1/2"	EA	1

Extension Rings*

Extension rings are used when extra cubic inch capacity is needed for additional wiring. Galvanized steel.



PI390

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	UOM	ORDER MULTIPLE
PI390	4"	2-1/8"	1-7/8"	13.0	1/2	EA	1
PI391	4"	4"	1-1/2"	21.0	3/4 & 1/2	EA	1

Utility Covers*

These covers are 4 1/4in. x 2 11/32in. and are designed for appliances or emergency oil burners.



PI383

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI383	Appliance Switch, .4687" dia. hole, baked cadilite finish	EA	1
PI374	Red finish, "Emergency Gas Burner" in white letters	EA	1

Plated Steel Utility Covers*

Ideal for exposed work applications, providing an easy method for the installation of electrical devices (switches, receptacles, fans, lights, etc.)



PI365

CATALOG NO.	DESCRIPTION	WIDTH	LENGTH	UOM	ORDER MULTIPLE
PI365	Toggle Switch	2-11/32"	4-1/4"	EA	1
PI366	Duplex Receptacle	2-11/32"	4-1/4"	EA	1
PI367	Blank Cover	2-11/32"	4-1/4"	EA	1
PI375	Standard Single Receptacle	2-11/32"	4-1/4"	EA	1

Utility Plates*

These plates are 4 1/4in. x 2 11/32in. and are designed for emergency oil burners.



PI393

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI393	Red finish, "Emergency Oil Burner" in white letters	EA	1
PI394	Red finish, "Emergency Gas Burner" in white letters	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

BOXES, RINGS, AND COVERS cont'd

Steel 1900 Covers*

The covers are baked in a cadillite finished steel and are raised 1/2in. with fully depressed corners. Size: 4" x 4".



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI377	Single Toggle	EA	1
PI378	Single Duplex Receptacle	EA	1
PI379	One Standard Single Receptacle	EA	1
PI368	Toggle Switch and Duplex Receptacle	EA	1
PI370	Toggle Switch and Standard Single Receptacle	EA	1
PI371	Flat, Blank, Galvanized steel (not Cadillite finished)	EA	1

Weatherproof Covers*

These covers can be used with item PI385 and come with gaskets.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI382	Blank Cover	EA	1
PI386	Lever Switch Cover for standard toggle type switches	EA	1
PI389	Duplex Receptacle Cover	EA	1
PI389-GFI	GFI Receptacle Cover	EA	1

Weatherproof Boxes*

Heavy duty die cast aluminum with baked aluminum finish. Boxes have two closure plugs and three holes. Item is Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	HOLE SIZE (in.)	UOM	ORDER MULTIPLE
PI385	4-1/2"	2-3/4"	2"	19.0	1/2	EA	1
PI385-34	4-1/2"	2-3/4"	2"	19.0	3/4	EA	1

Weatherproof Box with Lever Switch Cover*

The box is heavy duty die cast aluminum with baked aluminum finish and has two closure plugs and three holes. The cover comes with the gaskets. Includes parts PI385 and PI386.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI384	Weatherproof Box and Lever Switch Cover	EA	1

Safety Plates*

Safety plates, also called nail in plates, or nail plates, install quickly and protect wire, cable and pipes that may be installed in upright wood stud walls.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI232CX	Safety Plate – approximately 6"	EA	100

CABLE CONNECTORS

Zinc Plated Die Cast Steel Romex Connectors*

These zinc plated die cast connectors are for use with Romex, Service, and UF Cables.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI321	Zinc plated die cast Romex Connector, pack of 8	3/8"	1/2"	PK	1
PI320	Zinc plated die cast Romex Connector, pack of 25	3/8"	1/2"	PK	1
PI319	Zinc plated die cast Romex Connector, pack of 4	3/4"	3/4"	PK	1
PI319CX	Zinc plated die cast Romex Connector, pack of 100	3/4"	3/4"	PK	1

Rigid Conduit Bodies*

These bodies are Aluminum and can be used indoor or outdoor. Use to gain access to the interior of a raceway for wire pulling, splicing (with limitations as specified by the NEC), and maintenance. This item comes with cover and gasket.



CATALOG NO.	DESCRIPTION	TRADE SIZE	BODY TYPE	UOM	ORDER MULTIPLE
PI458	Includes steel cover, screws, gasket	1/2"	Back (LB)	EA	1
PI459	Includes steel cover, screws, gasket	3/4"	Back (LB)	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

CABLE CONNECTORS cont'd

BX and Greenfield Connectors*

These connectors are used to terminate Flexible Metal Conduit to a knock out in a dry location box or enclosure. Zinc die cast.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI311	Set Screw Type Connector, 25 per pack	3/8"	1/2"	PK	1
PI312	Set Screw Type Connector, 8 per pack	3/8"	1/2"	PK	1
PI322	Straight Connector, squeeze type, for armored cable and flexible conduit, 8 per pack	3/8"	1/2"	PK	1
PI315	90° Connector, 3 per pack	3/8"	1/2"	PK	1
PI341	90° Connector, 4 per pack	1/2"	1/2"	PK	1
PI340	Combination Cable Connector suitable for Romex or BX and Greenfield, 8 per pack	3/8"	1/2"	PK	1
PI318	Duplex Connector with single screw, clamp type, 2 per pack	3/8"	1/2"	PK	1

Liquid-Tite Connectors*

These connectors are made of zinc die cast and can be used with Flexible Metal Conduits and non metallic conduits. Zinc die cast.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI350	Straight Liquid-Tite Connector, 2 per pack	1/2"	1/2"	PK	1
PI351	Straight Liquid-Tite Connector, 2 per pack	3/4"	3/4"	PK	1
PI352	90° Liquid-Tite Connector	1/2"	1/2"	EA	1
PI353	90° Liquid-Tite Connector	3/4"	3/4"	EA	1

Thinwall E.M.T. Connectors*

These are used to join EMT conduit to boxes on enclosures. Zinc die cast.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI411	Compression Type Connectors, 8 per pack	1/2"	1/2"	PK	1
PI412	Compression Type Connectors, 8 per pack	3/4"	3/4"	PK	1
PI416	Compression Type Couplings, 8 per pack	3/4"		PK	1
PI426	Compression Type Straight Connectors for connecting E.M.T. to Liquid-Tight, 8 per pack	3/4"		PK	1
PI419	Set Screw Type Connectors, 8 per pack	1/2"	1/2"	PK	1

CABLE TIES AND ACCESSORIES

Heavy Duty Nylon Cable Ties


Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
6265BLX	Nylon; Heavy-duty, pack of 50	14"	Black	4"	175 lb.	PK	1
6265BCX	Nylon; Heavy-duty, pack of 100	14"	Black	4"	175 lb.	PK	1
6266BLX	Nylon; Heavy-duty, pack of 50	36"	Black	11"	175 lb.	PK	1

Nylon Cable Ties with Mounting Hole

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	MOUNTING HOLE	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
60264CX	Tie w/mtg. hole, pack of 100	#8	6"	Natural	1-3/8"	30 lb.	PK	1
60264BCX	Tie w/mtg. hole, pack of 100	#8	6"	Black	1-3/8"	30 lb.	PK	1
6264LX	Tie w/mtg. hole, pack of 50	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264CX	Tie w/mtg. hole, pack of 100	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264BCX	Tie w/mtg. hole, pack of 100	#10	7"	Black	1-3/4"	50 lb.	PK	1
60263CX	Tie w/mtg. hole, pack of 100	#10	11"	Natural	3"	50 lb.	PK	1
60263BLX	Tie w/mtg. hole, pack of 50	#10	11"	Black	3"	50 lb.	PK	1
60263BCX	Tie w/mtg. hole, pack of 100	#10	11"	Black	3"	50 lb.	PK	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

CABLE TIES AND ACCESSORIES cont'd

Nylon Cable Ties

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
6267MX	Nylon Cable Ties, pack of 1,000	4"	Natural	1-3/16"	18 lb.	PK	1
6261CX	Nylon Cable Ties, pack of 100	6"	Natural	1-3/8"	18 lb.	PK	1
6261BCX	Nylon Cable Ties, pack of 100	6"	Black	1-3/8"	18 lb.	PK	1
6268BMX	Nylon Cable Ties, pack of 1,000	6"	Black	1-3/8"	30 lb.	PK	1
6262LX	Nylon Cable Ties, pack of 50	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262CX	Nylon Cable Ties, pack of 100	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262MX	Nylon Cable Ties, pack of 1,000	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262BLX	Nylon Cable Ties, pack of 50	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BCX	Nylon Cable Ties, pack of 100	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BMX	Nylon Cable Ties, pack of 1,000	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6263LX	Nylon Cable Ties, pack of 50	11"	Natural	3"	50 lb.	PK	1
6263CX	Nylon Cable Ties, pack of 100	11"	Natural	3"	50 lb.	PK	1
6263DX	Nylon Cable Ties, pack of 500	11"	Natural	3"	50 lb.	PK	1
6263BLX	Nylon Cable Ties, pack of 50	11"	Black	3"	50 lb.	PK	1
6263BCX	Nylon Cable Ties, pack of 100	11"	Black	3"	50 lb.	PK	1
6263BDX	Nylon Cable Ties, pack of 500	11"	Black	3"	50 lb.	PK	1
60265LX	Nylon Cable Ties, pack of 50	14"	Natural	4"	50 lb.	PK	1
60265BLX	Nylon Cable Ties, pack of 50	14"	Black	4"	50 lb.	PK	1

Black Nylon Cable Tie Assortment

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
62000AX	Assortment	7-1/2"	Black	1-3/4"	50 lb.	PK	1
		11"	Black	3"	50 lb.		

Cable Tie Mounts

Approximately 1in. square adhesive backed. These mounts can be mounted with a screw and will accept up to 75 lb. ties.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6269	Cable Tie Mounts; 1" square; adhesive backed, pack of 11	PK	1
6269LX	Cable Tie Mounts; 1" square; adhesive backed, pack of 50	PK	1
6269MX	Cable Tie Mounts; 1" square; adhesive backed, pack of 1,000	PK	1

CONDUIT FITTINGS

Straps

Our zinc plated steel straps are designed to hold conduit pipe.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI306	Straps fit 1/2" E.M.T. Conduit, pack of 20	PK	1
PI306CX	Straps fit 1/2" E.M.T. Conduit, pack of 100	PK	1
PI307	Straps fit 3/4" E.M.T. Conduit, pack of 12	PK	1
PI307CX	Straps fit 3/4" E.M.T. Conduit, pack of 100	PK	1
PI908	Straps fit 1" E.M.T. Conduit, pack of 10	PK	1
PI908CX	Straps fit 1" E.M.T. Conduit, pack of 100	PK	1
PI909LX	Straps fit 1-1/4" E.M.T. Conduit, pack of 50	PK	1
PI206	Straps for 14-2 Romex, pack of 20	PK	1

Reducing Washers

Reducing washers are for reducing knockout holes. These washers have raised flanges for a tight fit and are made of galvanized steel. PI308 reduces hole to fit appliance switch.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI304	Reducing Washer - reduces hole from 1" to 1/2", pack of 10	PK	1
PI305	Reducing Washer - reduces hole from 1" to 3/4", pack of 10	PK	1
PI310	Reducing Washer - reduces hole from 3/4" to 1/2", pack of 28	PK	1
PI310LX	Reducing Washer - reduces hole from 3/4" to 1/2", pack of 50	PK	1
PI912	Reducing Washer - reduces hole from 2" to 3/4", pack of 5	PK	1
PI912LX	Reducing Washer - reduces hole from 2" to 3/4", pack of 50	PK	1
PI913	Reducing Washer - reduces hole from 1-1/2" to 1/2", pack of 4	PK	1
PI914	Reducing Washer - reduces hole from 1-1/2" to 3/4", pack of 4	PK	1

Knockout Seals and Hole Plug



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI316	For 1/2" knockouts, zinc plated steel, pack of 10	PK	1
PI317	For 3/4" knockouts, zinc plated steel, pack of 10	PK	1
ED406	Nylon Hole Plug for 3/8" hole, pack of 28	PK	1

Conduit Nipples*

Used to connect two electrical utility boxes where room is limited. Zinc die cast steel. Comes with plated steel locknuts.



CATALOG NO.	DESCRIPTION	SIZE	CONNECTION	UOM	ORDER MULTIPLE
PI203	Conduit Nipple, pack of 6	1/2"	Straight	PK	1

CONDUIT FITTINGS cont'd

Conduit Nipples*

PI301 is zinc die cast steel. PI303 is galvanized steel. All come with plated steel locknuts and plastic insulating bushings.



Bushings and Locknuts

The locknuts and bushing are straight connectors provide excellent pullout strength and can be installed without disassembly. The compression nut ratchet prevents unintentional loosening.



CATALOG NO.	DESCRIPTION	SIZE	CONNECTION	UOM	ORDER MULTIPLE
PI301	Conduit Nipple, pack of 2	1/2"	Offset	PK	1
PI303	Conduit Nipple, pack of 2	1/2" x 2"	Straight	PK	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI331	Plastic "Anti-Short" Bushings for 14/2, 14/3, 12/2 BX cable, pack of 35	PK	1

Electrical Staples

We have steel, insulated copper finish, and plastic electrical staples available.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
PI330	Plastic; for 2 conductor Romex and other NM cable conductor; 12/2-14/2 range; UV protected, pack of 50	3/8" x 1/2"	PK	1
PI332	Plastic; for 3 conductor Romex and other NM cable conductor; 12/3-14/3 range; UV protected, pack of 50	3/8" x 3/4"	PK	1
PI309	Steel; non-insulated for Romex and NM cable; 14/2-10/3 range, pack of 154	1" x 1/2"	PK	1
ED273	Insulated coppered finish; size #5, pack of 50	5/8" x 1/4"	PK	1
ED273CX	Insulated coppered finish; size #5, pack of 100	5/8" x 1/4"	PK	1

GENERAL TOOLS

Devco Crimpers

Crimps insulated and non insulated terminals 22 to 10 AWG, cuts bolts #4 40 through #10 24, and strips stranded wire 22 to 10 AWG and solid wire 18 to 8 AWG. Features two precision ground wire cutters, one on the nose and the other behind the pivot point. Plastic cushion handle.



Blind Rivet Tools

Heavy duty hand rivet tool that offers long handles to increase leverage and to secure the rivet in the nosepiece while the tool is in use. Powerful riveting capacity with 4 standard nosepieces to set 3/32, 1/8, 5/32, and 3/16" blind rivets.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5002	Devco Crimpers; plastic coated handle	EA	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5107	Heavy-duty tool; 4 interchangeable nose pieces to accommodate 3/32", 1/8", 5/32", 3/16" steel or aluminum rivets	EA	1

Magnetic Hex Chucks

Magnetic Hex Chucks may be used with an electric drill to drive hex washer head screws.



CATALOG NO.	DESCRIPTION	HEX HEAD SIZE	HEX HEAD DIAMETER	LENGTH	UOM	ORDER MULTIPLE
DE13	Magnetic Hex Chuck	1/4"	7/16"	1-3/4"	EA	1
DE14	Magnetic Hex Chuck	5/16"	1/2"	1-3/4"	EA	1
DE15	Magnetic Hex Chuck	3/8"	9/16"	1-7/8"	EA	1
DE23	Magnetic Hex Chuck	1/4"	7/16"	2-9/16"	EA	1
DE24	Magnetic Hex Chuck	5/16"	1/2"	2-9/16"	EA	1
DE33**	Magnetic Hex Chuck	1/4"	7/16"	3"	EA	1


**Magnetic insert bit holder with a "C" ring retainer

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

NUTS AND BOLTS

Finished Hex Nuts

The hex nuts are zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6501	Finished Hex Nuts, pack of 60	1/4" - 20	PK	1
6501CX	Finished Hex Nuts, pack of 100	1/4" - 20	PK	1
6502	Finished Hex Nuts, pack of 38	5/16" - 18	PK	1
6503	Finished Hex Nuts, pack of 25	3/8" - 16	PK	1
6503CX	Finished Hex Nuts, pack of 100	3/8" - 16	PK	1
6505	Finished Hex Nuts, pack of 11	1/2" - 13	PK	1
6505LX	Finished Hex Nuts, pack of 50	1/2" - 13	PK	1

Stove Bolts


Stove Bolts are a combination of slotted round head machine screws and finished hex nuts. They are made of zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	LENGTH	UOM	ORDER MULTIPLE
6401	Stove Bolts, pack of 42	#10 - 24	1/2"	PK	1
6402	Stove Bolts, pack of 38	#10 - 24	3/4"	PK	1
6403	Stove Bolts, pack of 34	#10 - 24	1"	PK	1
6404	Stove Bolts, pack of 27	#10 - 24	1-1/2"	PK	1
6411	Stove Bolts, pack of 22	1/4" - 20	1/2"	PK	1
6412	Stove Bolts, pack of 20	1/4" - 20	3/4"	PK	1
6413	Stove Bolts, pack of 18	1/4" - 20	1"	PK	1
6414	Stove Bolts, pack of 15	1/4" - 20	1-1/2"	PK	1
6415	Stove Bolts, pack of 13	1/4" - 20	2"	PK	1
6416	Stove Bolts, pack of 11	1/4" - 20	2-1/2"	PK	1

Flat Washers

These washers are zinc plated steel with a USS Classification.



CATALOG NO.	DESCRIPTION	SIZE	INNER DIAMETER	OUTER DIAMETER	UOM	ORDER MULTIPLE
6701	Flat Washers (USS), pack of 160	3/16"	1/4"	9/16"	PK	1
6702	Flat Washers (USS), pack of 72	1/4"	5/16"	3/4"	PK	1
6703	Flat Washers (USS), pack of 33	5/16"	3/8"	7/8"	PK	1
6704	Flat Washers (USS), pack of 37	3/8"	7/16"	1"	PK	1
6704-2X	Flat Washers (USS), pack of 134	3/8"	7/16"	1"	PK	1
6706	Flat Washers (USS), pack of 11	1/2"	9/16"	1-3/8"	PK	1
6706-2X	Flat Washers (USS), pack of 52	1/2"	9/16"	1-3/8"	PK	1
6700AX	Assortment	All sizes included			EA	1

Machine Screw Hex Nuts

The hex nuts are zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6526	Machine Screw Hex Nuts, pack of 49	#8 - 32	PK	1
6528	Machine Screw Hex Nuts, pack of 44	#10 - 24	PK	1
6500A	Assortment, 23 of each	#6-32, #8-32, #10-32	EA	1

Toggle Bolts

The toggle bolts are slotted round head machine screws with spring wings and are made of zinc plated steel.



CATALOG NO.	DESCRIPTION	LENGTH	BOLT SIZE	HOLE SIZE	UOM	ORDER MULTIPLE
7033	Toggle Bolts, pack of 6	4"	3/16"	1/2"	PK	1
7034	Toggle Bolts, pack of 5	4"	1/4"	5/8"	PK	1
7036X	Toggle Bolts, pack of 4	4"	3/8"	1"	PK	1
7066X	Toggle Bolts, pack of 4	6"	3/8"	1"	PK	1

Hex Head Cap Screws

Hex Screw Cap Screws are made of low carbon, grade 2 steel and are USS Classified. The total thread length on these screws equal 2x diameter + 1/4in.



CATALOG NO.	DESCRIPTION	SIZE	LENGTH	UOM	ORDER MULTIPLE
6601	Hex Head Cap Screws, pack of 28	1/4" - 20	3/4"	PK	1
6602	Hex Head Cap Screws, pack of 25	1/4" - 20	1"	PK	1
6603	Hex Head Cap Screws, pack of 18	1/4" - 20	1-1/2"	PK	1
6622	Hex Head Cap Screws, pack of 15	5/16" - 18	1"	PK	1
6623	Hex Head Cap Screws, pack of 12	5/16" - 18	1-1/2"	PK	1
6641	Hex Head Cap Screws, pack of 14	3/8" - 16	3/4"	PK	1
6642	Hex Head Cap Screws, pack of 12	3/8" - 16	1"	PK	1
6643	Hex Head Cap Screws, pack of 8	3/8" - 16	1-1/2"	PK	1
6644	Hex Head Cap Screws, pack of 7	3/8" - 16	2"	PK	1
6645	Hex Head Cap Screws, pack of 5	3/8" - 16	2-1/2"	PK	1
6685	Hex Head Cap Screws, pack of 3	1/2" - 13	2-1/2"	PK	1

Medium Split Lock Washers

Spring type. These washers are made of zinc plated steel.




CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6730	Medium Split Lock Washers, pack of 95	3/16"	PK	1
6731	Medium Split Lock Washers, pack of 72	1/4"	PK	1
6732	Medium Split Lock Washers, pack of 59	5/16"	PK	1
6733	Medium Split Lock Washers, pack of 38	3/8"	PK	1
6735	Medium Split Lock Washers, pack of 18	1/2"	PK	1

NUTS AND BOLTS cont'd

Fender Washers

These washers are made of zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	INNER DIAMETER	OUTER DIAMETER	UOM	ORDER MULTIPLE
6722	Fender Washers, pack of 20	1/4"	9/32"	1-1/4"	PK	1
6722-2X	Fender Washers, pack of 92	1/4"	9/32"	1-1/4"	PK	1
6724	Fender Washers, pack of 12	3/8"	13/32"	1-1/2"	PK	1
6724-2X	Fender Washers, pack of 66	3/8"	13/32"	1-1/2"	PK	1

POWER CORDS AND WORK LIGHTS

Round Extension Cords*

Comes in bright orange or yellow, depending upon availability.



CATALOG NO.	DESCRIPTION	WIRE	LENGTH	RATING	UOM	ORDER MULTIPLE
5230	Round Extension Cord	14/3	100'	13A/125V	EA	1

Trouble Lights*

These all weather lights are extra flexible with metal guards.



CATALOG NO.	DESCRIPTION	WIRE	CORD LENGTH	RATING	UOM	ORDER MULTIPLE
5200	Trouble Light	16/3	25'	13A/125V	EA	1
5201	Trouble Light	16/3	50'	13A/125V	EA	1

SCREWS

Combo Head Sheet Metal Screws

These screws are used on sheet metal items.



CATALOG NO.	DESCRIPTION	LENGTH	SCREW SIZE	UOM	ORDER MULTIPLE
6853	Combo Head Screws, pack of 48	1/2"	#10	PK	1
6855	Combo Head Screws, pack of 46	3/4"	#10	PK	1
6858	Combo Head Screws, pack of 26	1-1/2"	#10	PK	1
6859	Combo Head Screws, pack of 19	2"	#10	PK	1
6865	Combo Head Screws, pack of 32	3/4"	#12	PK	1
6866	Combo Head Screws, pack of 26	1"	#12	PK	1
6876	Combo Head Screws, pack of 20	1"	#14	PK	1

Sheet Metal Screw Assortments

6800BX and 6800HX come in a four compartment, clear plastic box.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6800HX	Slotted Hex Washer Head Screws: #6 x 3/8", #8 x 1/2", #8 x 3/4", #10 x 3/4", #10 x 3/4", #10 x 1"	EA	1

Self-Drilling Screw Repair Kit

These screws are used for replacements in striped holes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6900AX	Contains: #12 x 3/4", #12 x 1", #14 x 3/4", #14 x 1"	EA	1

Self-Drilling Screws

Zinc plated steel. Self drilling screws drill and tap holes in one step. Hex washer heads. #8 and #10 screws are designed for use with material thickness of .035" to .110"; #12 and #14 screws are designed for use with .110" to .220" material thickness.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6943CX	Hex Head Self Drilling Screw, 1/4in. Head #8 x 1/2in., 100 pcs	EA	1
6945CX	Hex Head Self Drilling Screw, Zinc Plated, #8 x 3/4in., 100 pcs	EA	1
6946CX	Hex Head Self Drilling Screw, 1/4in. Head #8 x 1in, 100 pcs	EA	1
6953CX	Hex Washer Head Self Drilling Screws 5/16in. Head #10 x 1/2in 100 pcs	EA	1
6955CX	Hex Head Self Drilling Screw, 5/16in. Head #10 x 3/4in., 100 pcs	EA	1
6956CX	Hex Washer Head Self Drilling Screws 5/16in. Head #10 x 1in 100 pcs	EA	1

SPECIALTY FASTENERS

Nylon Cable Clamps

These cable clamps are perfect for securing wire or pipes.



CATALOG NO.	DESCRIPTION	FITS PIPE OUTER DIAMETER	THICKNESS	WIDTH	UOM	ORDER MULTIPLE
5381	Nylon Cable Clamps, pack of 54	1/8"	.050"	3/8"	PK	1
5382	Nylon Cable Clamps, pack of 48	1/4"	.050"	3/8"	PK	1
5383	Nylon Cable Clamps, pack of 41	3/8"	.050"	3/8"	PK	1
5384	Nylon Cable Clamps, pack of 35	1/2"	.050"	3/8"	PK	1
5385	Nylon Cable Clamps, pack of 21	5/8"	.060"	1/2"	PK	1
5380AX	Assortment	1/8" - 1"			EA	1

Pipe Hanging Strap

Non plated Steel Pipe hanging Strap is perfect for hanging pipes, fastening faucets and valves, as well as repair jobs.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
PI335	Pipe Hanging Strap; 28 gauge AWG	3/4" x 10'	EA	1

Cotter Pins

Cotter Pins provide smooth locking between two parts. This set includes an assortment of regular Cotter Pins with extended prongs.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6011	Cotter Pins: 1/16" x 1-1/2"; 3/32" x 1-1/2"; 1/8" x 1-1/2", pack of 51	PK	1

Motor Shaft Key Assortments

You can use choose from either a large assortment or a small assortment. The keys are made of cold rolled 1018 steel and are zinc plated.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6101	Small Assortment includes: 1/8" x 1/8" x 1-3/16"; 3/16" x 3/16" x 1-3/16"; 3/16" x 1/4" x 1-3/16"; 1/4" x 1/4" x 1-3/4"	EA	1
6102	Large Assortment includes: 1/4" x 1/4" x 1-3/4"; 5/16" x 5/16" x 3"; 3/8" x 3/8" x 3	EA	1

Hose Clamps

Hose Clamps have stainless steel housings and bands. The screws are plated steel and have slotted hex heads allowing a socket wrench, nut driver, or screwdriver to be used.



CATALOG NO.	DESCRIPTION	SAE NO.	SAE DIAMETER RANGE (in.)	APPROX. RANGE (in.)	UOM	ORDER MULTIPLE
HC6202	Hose Clamps, pack of 6	*	N/A	1/4 to 5/8	PK	1
HC6203	Hose Clamps, pack of 6	6	.44 - .78	5/16 to 7/8	PK	1
HC5410	Hose Clamps, pack of 6	10	.56 - 1.06	9/16 to 1-1/8	PK	1
HC5410X	Hose Clamps, pack of 10	10	.56 - 1.06	9/16 to 1-1/8	PK	1
HC5416	Hose Clamps, pack of 6	16	.81 - 1.50	3/4 to 1-1/2	PK	1
HC5416X	Hose Clamps, pack of 10	16	.81 - 1.50	3/4 to 1-1/2	PK	1
HC5420	Hose Clamps, pack of 6	20	.81 - 1.75	13/16 to 1-3/4	PK	1
HC5424	Hose Clamps, pack of 6	24	1.06 - 2.00	1-1/16 to 2	PK	1
HC5436	Hose Clamps, pack of 4	36	1.81 - 2.75	1-1/2 to 2-3/4	PK	1

Set Screws

Set Screws have cup points and hex socket heads. Class 3A threads. Made of heat treated alloy steel.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6000	Large Assortment; course thread	1/4"-20; 5/16"-18; 3/8"-16	EA	1
6001	Small Assortment; fine thread	#8-32; #10-32; 1/4"-28	EA	1


*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

SPECIALTY FITTINGS

Grease Fittings

Case hardened steel fittings plated with yellow dip chromate and built-in ball checks. Assortment available in clear plastic box.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6311	Grease Fittings: 1/4"-28 Tapered Thread; straight, pack of 8	PK	1
6312	Grease Fittings: 1/8" Pipe Thread; straight, pack of 5	PK	1
6321	Grease Fittings: 1/4"-28 Tapered Thread; 90°, pack of 3	PK	1
6322	Grease Fittings: 1/8" Pipe Thread; 90°, pack of 3	PK	1
6310X	Assortment includes: 6311, 6312, 6321, 6322	EA	1



STORAGE CONTAINERS

Metal Parts Boxes

Metal Parts Boxes are prime cold rolled steel with baked gray enamel finish. The finish is rust and acid resistant. Each box comes with high impact plastic tray, positive pull down catch, and stick back parts labels for lid interiors.



CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L x W x D)	UOM	ORDER MULTIPLE
8200M	Metal Parts Box	21	13-3/8" x 9-1/4" x 2"	EA	1
8220M	Metal Parts Box	24	18" x 12" x 3"	EA	1

Satchel Style Case

Parts box made from rugged copolymer material with high impact translucent lid and handle on the side. 15 removable dividers allow up to 24 compartments.



CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L x W x D)	UOM	ORDER MULTIPLE
8233	Satchel Style Case	Up to 24	15" x 11-3/4" x 2-1/2"	EA	1

Polypropylene Parts Boxes

This box is ideal for holding your different sized nuts and bolts along with your additional bits. It can be stored in a tool box as well.



CATALOG NO.	DESCRIPTION	COLOR	NO. OF COMPARTMENTS	DIMENSIONS (L x W x D)	UOM	ORDER MULTIPLE
8201C	Polypropylene Parts Box Translucent		13	11" x 6-3/4" x 1-1/4"	EA	1
8203C	Polypropylene Parts Box Translucent		24	13-1/8" x 9" x 2-5/8"	EA	1

TAPES

Tape

Vinyl electrical tape. Part 5247 holds up to 7 pounds per square inch when attached to steel surface.



CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE
5255	Vinyl Electrical Tape	3/4" x 60'	EA	1

Teflon® Tape

This PTFE Tape is made of non toxic, pure white PTFE. The tape can be used with chemicals, solvents, oxygen, and on food lines. The product can withstand up to 2000 psi of pressure.



CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE
5246	Teflon® Thread Seal Tape	1/2" x 520"	EA	1

TESTERS, LEADS, CLIPS, FUSES

Clips

The clips are alligator clips and have vinyl red and black insulators.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5033	Steel Alligator Clips for use with test probes (.075"-.080"); 1-31/32" long; jaws open 5/16" max.; pack of 2 red, 2 black, 4 clips	PK	1
5035	Copper Alligator Clips; 1-31/32" long; jaws open 5/16" max.; crimpers slotted screw connection, pack of 2 red, 2 black, 4 clips	PK	1
5036	Steel Test Clips; 20A, 2-7/16" long; jaws open 5/8" max.; crimpers slotted screw connection, pack of 1 red, 1 black, 2 clips	PK	1

Blade (Auto) Fuses

These fuses are used to protect circuits in the wiring harness that are usually found under the hood, in a fuse panel or supplementary panel near the battery. MAX fuses are used in domestic and import vehicles.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED-AT3	Blade Fuse – 3 Amp – Purple, pack of 10	PK	1
ED-AT5	Blade Fuse – 5 Amp – Tan, pack of 10	PK	1

Test Leads

These are replacement leads.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5031	Low Voltage Test Leads; eight 22" long, color-coded leads with fully insulated alligator clips	EA	1
5041	Small Hook Type Low Voltage Test Leads; retractable hooks, 36" thermoplastic 22 gauge wire, nylon body/plunger, red/black	EA	1
5042	Large Hook Type Low Voltage Test Leads; retractable hooks, 36" PVC insulated 20 gauge wire, nylon body/plunger, red/black	EA	1
5046	Flexible Test Leads; steel alligator clips with vinyl red and black insulators; 36" 20 gauge wire; extremely flexible	EA	1

Dual Element Fuses – 250V

Provides time delay for temporary over-current conditions and motor running protection for heating and air conditioning equipment. Eliminates unnecessary maintenance from harmless overloads.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED-CR15	Dual Element Fuse – 15 Amps, pack of 2	PK	1
ED-CR20	Dual Element Fuse – 20 Amps, pack of 2	PK	1
ED-CR25	Dual Element Fuse – 25 Amps, pack of 2	PK	1
ED-CR30	Dual Element Fuse – 30 Amps, pack of 2	PK	1
ED-CR35	Dual Element Fuse – 35 Amps, pack of 2	PK	1
ED-CR40	Dual Element Fuse – 40 Amps, pack of 2	PK	1
ED-CR45	Dual Element Fuse – 45 Amps, pack of 2	PK	1
ED-CR50	Dual Element Fuse – 50 Amps, pack of 2	PK	1
ED-CR60	Dual Element Fuse – 60 Amps, pack of 2	PK	1

U.L. Class RK-5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

WIRE

TFFN Stranded Hook-Up Wire*


Packaged in handy dispenser bag. Polyvinyl chloride insulation. Wire rating: 600V, 90°C. Insulation: oil resistant nylon coating.



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	UOM	ORDER MULTIPLE
60331B	Black, pack of 50'	18	16	.09"	48'	PK	1
60331BE	Blue, pack of 50'	18	16	.09"	48'	PK	1
60331R	Red, pack of 50'	18	16	.09"	48'	PK	1
6332B	Black, pack of 50'	16	26	.10"	48'	PK	1
6332G	Green, pack of 50'	16	26	.10"	48'	PK	1
6332R	Red, pack of 50'	16	26	.10"	48'	PK	1
6332W	White, pack of 50'	16	26	.10"	48'	PK	1

THHN Stranded Hook-Up Wire*

Packaged in handy dispenser bag. Polyvinyl chloride insulation. Wire rating: 600V, 90°C. Insulation: oil resistant nylon coating.



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	UOM	ORDER MULTIPLE
6333B	Black, pack of 50'	14	19	.11"	48'	PK	1
6333G	Green, pack of 50'	14	19	.11"	48'	PK	1
6333R	Red, pack of 50'	14	19	.11"	48'	PK	1
6333W	White, pack of 50'	14	19	.11"	48'	PK	1
6334B	Black, pack of 50'	12	19	.13"	48'	PK	1
6334G	Green, pack of 50'	12	19	.13"	48'	PK	1
6334R	Red, pack of 50'	12	19	.13"	48'	PK	1
6334W	White, pack of 50'	12	19	.13"	48'	PK	1
6335B	Black, pack of 50'	10	19	.17"	48'	PK	1
6335G	Green, pack of 50'	10	19	.17"	48'	PK	1
6335R	Red, pack of 50'	10	19	.17"	48'	PK	1
6335W	White, pack of 50'	10	19	.17"	48'	PK	1
6360B	Black, pack of 50'	8	19	.22"	25'	PK	1
6360R	Red, pack of 50'	8	19	.22"	25'	PK	1
6360W	White, pack of 50'	8	19	.22"	25'	PK	1

WIRE cont'd

Thermostat Wire*

Thermoplastic insulated, jacketed wire for low voltage applications. Conductors are solid copper, individually insulated and color coded.



CATALOG NO.	DESCRIPTION	CONDUCTORS	WIRE GAUGE	LENGTH	UOM	ORDER MULTIPLE
6331	Thermostat Wire, pack of 40'	2	20	40'	PK	1
6336	Thermostat Wire, pack of 40'	3	20	40'	PK	1
6330-4	Thermostat Wire, pack of 40'	4	20	40'	PK	1
6337	Thermostat Wire, pack of 40'	5	20	40'	PK	1
6330-6	Thermostat Wire, pack of 40'	6	20	40'	PK	1
6338	Thermostat Wire, pack of 40'	8	20	40'	PK	1
6339XL	Thermostat Wire, pack of 40'	10	20	40'	PK	1

High Temperature Range Wire*


200°C glass braided, three conductor twisted wire. 600V; silicone rubber insulated. This product also contains a crimper.



CATALOG NO.	COLOR	WIRE GAUGE	LENGTH	UOM	ORDER MULTIPLE
6383-35	Black, Red, and White, pack of 5'	14	5'	PK	1
6383-325	Black, Red, and White, pack of 25'	14	25'	PK	1
6384-35	Black, Red, and White, pack of 5'	12	5'	PK	1
6384-325	Black, Red, and White, pack of 25'	12	25'	PK	1

SJTO Service Cord*


Features stranded bare copper, PVC insulation; PVC jacket. Cord is oil resistant. Cords have 3 individually insulated conductors. Ratings: 300V; 60°C.



CATALOG NO.	DESCRIPTION	WIRE GAUGE	LENGTH	UOM	ORDER MULTIPLE
6340	SJTO Service Cord, pack of 12'	16	12'	PK	1
6341	SJTO Service Cord, pack of 20'	16	20'	PK	1
6342	SJTO Service Cord, pack of 12'	14	12'	PK	1
6343	SJTO Service Cord, pack of 20'	14	20'	PK	1

Stranded High Temperature Wire*

Thermoplastic equipment insulated wire. CSA listed at 105°C; 600V. Insulation thickness: .03". MTW/AWM/TEW



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	UOM	ORDER MULTIPLE
6361B	Black, pack of 48'	18	16	.113"	48'	PK	1
6361R	Red, pack of 48'	18	16	.113"	48'	PK	1
6362B	Black, pack of 48'	16	26	.125"	48'	PK	1
6362W	White, pack of 48'	16	26	.125"	48'	PK	1
6363W	White, pack of 48'	14	19	.139"	48'	PK	1
6364B	Black, pack of 48'	12	19	.158"	48'	PK	1
6364R	Red, pack of 48'	12	19	.158"	48'	PK	1
6364W	White, pack of 48'	12	19	.158"	48'	PK	1
6365R	Red, pack of 48'	10	19	.182"	48'	PK	1

WIRING DEVICES

Thermoplastic Handle Plug*

This plug is a standard grade with flexible spring prongs and is furnished with a face washer. This product's rating is a 15A 125V and also contains a crimper.



CATALOG NO.	DESCRIPTION	MAX. CORD DIAMETER	POLES	WIRES	MATERIAL	UOM	ORDER MULTIPLE
ED179	Handle Plug	.406"	2	2	Thermoplastic	EA	1

Grounding Rubber Handle Plug*

The rubber back design allows for sure grip and protection against dirt and moisture entry. This plug is designed to operate in the widest possible temperature ranges.



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED1709	Grounding Handle Plug	.25"-.60"	2	3	15A-125V	EA	1

Tandem Grounding Rubber Handle Plug*

The rubber back design allows for sure grip and protection against dirt and moisture entry. This plug is designed to operate in the widest possible temperature ranges



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED1711	Tandem Handle Plug	.25"-.60"	2	3	15A-250V	EA	1

Armored Plug*

This plug has a round dead front and is vinyl enclosed.



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED2867	Armored Plug	.25"-.625"	2	3	15A-125V	EA	1

WIRING DEVICES cont'd

Right Angle Plug*

Our right angle plug is ergonomically designed fluted body with radial gripping ridge creates an ideal surface for gripping and pulling.



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED4409	Right Angle Plug	.25"-.655"	2	3	20A-125V	EA	1
ED4509	Right Angle Plug	.25"-.655"	2	3	20A-250V	EA	1
ED4867	Right Angle Plug	.25"-.655"	2	3	15A-125V	EA	1

Rubber Connector*

This is a standard grade rubber connector with a 3 pole opening.



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED252	Rubber Connector	.25"-.60"	2	3	15A-125V	EA	1

Armored Connector*

The Armor Connector is ideal for shops, garages, and heavier duty work areas. Vinyl enclosed.



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED2887	Armored Connector	.225"-.60"	2	3	15A-125V	EA	1

Ground Adapter*

This adapter is polarized with 2 pole to 3 wire grounding. The body is made of polypropylene.



CATALOG NO.	DESCRIPTION	RATING	UOM	ORDER MULTIPLE
ED419	Ground Adapter	15A-125V	EA	2

Triple Outlets*

These outlets are polarized and are made of high impact resistant plastic.



CATALOG NO.	DESCRIPTION	RATING	UOM	ORDER MULTIPLE
5223	Heavy duty, 2 pole, 3 wire	15A-125V	EA	1

Power Supply Replacement Cords*

For power tools or appliances. Black vinyl cord is flexible in very cold environments. Wire type is SJEOW-A.



CATALOG NO.	DESCRIPTION	WIRE	RATING	LENGTH	UOM	ORDER MULTIPLE
5249	SJEOW replacement power supply cord	14/3	15A / 125V	9'	EA	1

Receptacles*

Our receptacles are available in either singles or duplexes. This is a 2 pole, 3 wire product with ground included. Standard Grade.



CATALOG NO.	DESCRIPTION	RATING	COLOR	UOM	ORDER MULTIPLE
ED1876	Single Receptacle	20A-250V	Brown	EA	1
ED1876-I	Single Receptacle	20A-250V	Ivory	EA	1
ED1877	Single Receptacle	20A-125V	Brown	EA	1
ED270**	Duplex Receptacle	15A-125V	Brown	EA	1
ED270-I**	Duplex Receptacle	15A-125V	Ivory	EA	1
ED877	Duplex Receptacle	20A-125V	Brown	EA	1

**Standard Grade

Toggle Switch and Receptacle Combination Device*

This device is a single pole switch with 15A 120V AC. The receptacle is 15A 125V AC and it is a 2 pole, three wire grounding.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED5225	Toggle Switch and Receptacle – Brown Body	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

WIRING DEVICES cont'd

Metal Bat Handle Toggle Switches*

Features black phenolic plastic case; brass terminals; steel and zinc chromate frame and support; all other external parts are brass/bright nickel. These heavy duty toggle switches have screw terminals. Part ED447 has an "ON-OFF" face plate.

Specifications: 10A/277V-20A/125V AC
 Single Pole: 3/4HP 125-250V AC
 Double Pole: 1-1/2HP 125-250V AC



CATALOG NO.	DESCRIPTION	SEQUENCE	CIRCUIT	UOM	ORDER MULTIPLE
ED447	Bat Handle Toggle Switch	ON-OFF	Single Pole, Single Throw	EA	1
ED453	Bat Handle Toggle Switch	ON-ON	Double Pole, Double Throw	EA	1
ED454	Bat Handle Toggle Switch	ON-ON	Single Pole, Double Throw	EA	1
ED455	Bat Handle Toggle Switch	ON-OFF	Double Pole, Single Throw	EA	1
ED468	Bat Handle Toggle Switch	ON-OFF-ON	Single Pole, Double Throw	EA	1
ED494	Bat Handle Toggle Switch	ON-OFF-ON	Double Pole, Double Throw	EA	1
ED448B	Bat Handle Toggle Switch	ON-OFF	Single Pole, Single Throw	EA	1

Toggle Switch with Neon Pilot Light Combination Device*

Switch: 15A-120V AC
 Neon Pilot Light: 1/25W, 120V AC



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED277	Toggle Switch with Neon Pilot Light - Brown Body	EA	1

Utility Fuse Outlets*

This is designed to break up electrical surges on equipment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI381	Utility Fuse Outlet and Switch with Cover; 1/2HP-125V AC only; galvanized steel construction	EA	1

6180 Series Terminal Blocks*

These terminal blocks are constructed of high barrier thermoplastic are rated 20A 250V.



CATALOG NO.	DESCRIPTION	NO. OF POSITIONS	LENGTH (in.)	WIDTH (in.)	SCREW SIZE	MAX. WIRE SIZE	UOM	ORDER MULTIPLE
6182	Terminal Block	4	2.16	.88	6-32	22-14	EA	1
6183	Terminal Block	6	2.91	.88	6-32	22-14	EA	1
6184	Terminal Block	8	3.66	.88	6-32	22-14	EA	1
6185	Terminal Block	10	4.41	.88	6-32	22-14	EA	1
6186	Terminal Block	12	5.16	.88	6-32	22-14	EA	1
6187	Terminal Block	14	5.91	.88	6-32	22-14	EA	1

Toggle Switches*

Our toggle switch is a silent switch with ground included. Standard Grade.



CATALOG NO.	DESCRIPTION	RATING	COLOR	UOM	ORDER MULTIPLE
ED1240-2	Single Pole	15A-120/277V AC	Brown	EA	1
ED1238	Single Pole	20A-120/277V AC	Brown	EA	1
ED1301**	Single Pole	15A-120V AC	Brown	EA	1
ED1301-I**	Single Pole	15A-120V AC	Ivory	EA	1
ED1262-2	Double Pole	15A-120/277V AC	Brown	EA	1
ED1262-2I	Double Pole	15A-120/277V AC	Ivory	EA	1
ED1232	Double Pole	30A-120/277V AC	Brown	EA	1

**Standard Grade

Porcelain Outlet Box Lampholders*

Features one-piece pull chain. Two screw terminals, 2 pole, 2 wire. 4-1/2" outer diameter. These lamp holders fit 3-1/4" and 4" boxes. Rating: Lampholder: 660W/125V. Outlet: 15A/125V.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED9726	Porcelain Outlet Box Lampholder - U ground outlet	EA	1

Fuse Holders

Used to mount and protect fuses, fuse holders also enable fuses to be changed quickly and easily. Fuse holders are used in a variety of applications, including consumer electronics, industrial, telecom and datacom, automotive, and many others.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
EM480	In-Line Fuse Holder for use with 1-1/4 x 1/4" fuses up to 20 amps, 32 volts, 15" lead; 14 gauge red vinyl insulated wire	EA	1
EM484	Self-Stripping Fuse Holder mates with blade-type fuse .205 x .025", 18-14 AWG. Size: 1.37" L x .44" H x .95" W Max. Insulation Outer Diameter: .145"	EA	2

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

WIRING DEVICES cont'd

Vinyl Grommet Assortment Packs

These grommets exhibit high dielectric strength and are oil, ozone, and UV resistant.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED320	General Assortment – contains all grommet sizes	EA	1

Heat Shrink Tubing Assortments*

Heat Shrink Tubing is made of flame-retardant polyolefin. Thin walled, all purpose tubing. Rated 600V, 125°C. 2500 volts/mil. dielectric strength. Inert to fungus. Virtually unaffected by corrosives, common fluids, and solvents. Pieces are 6" in length.



CATALOG NO.	COLOR	INNER DIAMETER MAX SUPPLIED	MIN. RECOVERED	UOM	ORDER MULTIPLE
6370	Black & White, pack of 12	1/8", 1/4"	1/16", 1/8"	PK	1
6371	Black & White, pack of 7	1/8", 1/4", 3/8", 1/16", 1/8", 3/16"		PK	1
63070	Black, pack of 3	3/8" – 1/2"	3/16" – 1/4"	PK	1

Indicator Lights

Terminals are tin plated brass. Wire leads are 22 AWG, 4.4"–4.8" long, 1/2" stripped. Mounting will snap-fit into .500-.505 diameter hole in .020"-.100" thick panels.



CATALOG NO.	LENS COLOR	LENS MATERIAL	VOLTAGE	BULB TYPE	UOM	ORDER MULTIPLE
ED600	Red, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED601	Green, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED602	Amber, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED603	Blue, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED610	Red, pack of 2	Nylon	105–125V AC	Neon	PK	1
ED611	Green, pack of 2	Polycarbonate	105–125V AC	Neon**	PK	1
ED612	Amber, pack of 2	Nylon	105–125V AC	Neon	PK	1
ED613	Blue, pack of 2	Polycarbonate	105–125V AC	Neon†	PK	1
ED620	Red, pack of 2	Polycarbonate	208–250V AC	Neon	PK	1
ED621	Green, pack of 2	Polycarbonate	208–250V AC	Neon**	PK	1

6190 Series Terminal Blocks*

These terminal blocks are constructed of phenolic 9/16 in. centers. They are rated 30A 600V.



CATALOG NO.	DESCRIPTION	NO. OF POSITIONS	LENGTH (in.)	WIDTH (in.)	SCREW SIZE	MAX. WIRE SIZE	UOM	ORDER MULTIPLE
6193	Terminal Block	6	4.34	1.31	8-32	14-12	EA	1
6194	Terminal Block	8	5.47	1.31	8-32	14-12	EA	1
6195X	Terminal Block	10	6.59	1.31	8-32	14-12	EA	1

Indicator Lights*

Terminals are tin plated brass. Wire leads are 22 AWG, 4.4"–4.8" long, 1/2" stripped. .31" minimum diameter mounting.



CATALOG NO.	LENS COLOR	LENS MATERIAL	VOLTAGE	BULB TYPE	UOM	ORDER MULTIPLE
ED710	Red, pack of 2	Polycarbonate	105–125V AC	Neon	PK	1

Winged Wire Connectors*

Durable thermoplastic material. Flame retardant, abrasion resistant, non porous, and non corrosive. Expandable spring grips into the wire and adjusts itself to the wire size and shape so pre twisting is unnecessary. Even during temperature changes, they resist vibrations and retain holding power. Parts 8284 and 8286 are for use with copper to copper, aluminum to aluminum, and copper to aluminum (dry locations only).



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
8284	Small Yellow Winged Wire Connectors, pack of 18	PK	1
8284CX-B	Small Yellow Winged Wire Connectors, pack of 100	PK	1
8286	Medium Red Winged Wire Connectors, pack of 14	PK	1
8286CX-B	Medium Red Winged Wire Connectors, pack of 100	PK	1
8282LX	X-Large Blue Winged Wire Connectors, pack of 50	PK	1

*B indicates boxed product. All other catalog numbers are poly bagged.

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

WIRING DEVICES cont'd

Standard Wire Connectors*

Connectors are color coded with spring inserts. Heat resistant (105°C) thermoplastic. Connectors are for copper to copper connections. Parts 6294 and 6296 can connect aluminum to aluminum and copper to aluminum (dry locations only).



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6291	Mini Gray Standard Wire Connectors, pack of 29	PK	1
6291CX	Mini Gray Standard Wire Connectors, pack of 100	PK	1
6292	Tiny Blue Standard Wire Connectors, pack of 25	PK	1
6292CX	Tiny Blue Standard Wire Connectors, pack of 100	PK	1
6293	Small Orange Standard Wire Connectors, pack of 20	PK	1
6293CX	Small Orange Standard Wire Connectors, pack of 100	PK	1
6294	Medium Yellow Standard Wire Connectors, pack of 18	PK	1
6294CX	Medium Yellow Standard Wire Connectors, pack of 100	PK	1
6296	Large Red Standard Wire Connectors, pack of 12	PK	1
6296CX	Large Red Standard Wire Connectors, pack of 100	PK	1
6298	X-Large Gray Standard Wire Connectors, pack of 6	PK	1
6298LX	X-Large Gray Standard Wire Connectors, pack of 50	PK	1
6295X	Assortment: Includes 6291, 6292, 6293, 6294, 6296	EA	1

Aluminum Solderless Lugs*

Our aluminum solder less lug are made from high strength aluminum alloy. These lugs are suitable for use with either copper or aluminum conductors.



CATALOG NO.	DESCRIPTION	WIRE RANGE	AMP RATING	UOM	ORDER MULTIPLE
PI221	Small Lug for aluminum or copper wire, pack of 6	4-14	2	PK	1
PI222	Large Lug for aluminum or copper wire, pack of 6	2-14	2	PK	1

Pigtails

The wire has a #10 spade on one end and a 10 32 x 3/8in. slotted round head screw on the other. This allows for easy positioning in the outlet box.



CATALOG NO.	DESCRIPTION	WIRE LENGTH	WIRE GAUGE	WIRE TYPE	UOM	ORDER MULTIPLE
PI337-3	Pigtails, pack of 5	8"	14	Stranded	PK	1

Cable Markers

Cable markers come in books of 450 markers with matching terminal markers. Markers are mounted on dispenser cards in the book. Cable markers are suitable for above and below ground applications. Books are made of vinyl impregnated cloth that resists moderate amounts of dirt, oil and heat. The blank Write-On Markers (WM1014) are made of durable vinyl film that resists water, oils, and fungus. They can also withstand extremes in temperature.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WM1002	Alpha-Numeric Cable Marker Book; contains 10 each: A-Z, 0-15, +, -, /	EA	1
WM1003	Numeric Cable Marker Book; contains 10 each: 1-45	EA	1
WM1009	Line and Terminal Cable Marker Book; contains 45 each: 1, 2, 3, A, B, C; contains 30 each: T1, T2, T3, L1, L2, L3	EA	1
WM1014	180 Blank Write-On Markers, 1/2" x 1-1/2"	EA	1

Porcelain Wire Connectors*

For high temperature applications over 105°C (300 volts maximum). For stranded copper connections only.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4293	Small White Porcelain Wire Connectors, pack of 17	PK	1
4293CX	Small White Porcelain Wire Connectors, pack of 100	PK	1
4294	Medium White Porcelain Wire Connectors, pack of 15	PK	1
4294CX	Medium White Porcelain Wire Connectors, pack of 100	PK	1
4296	Large White Porcelain Wire Connectors, pack of 13	PK	1
4296CX	Large White Porcelain Wire Connectors, pack of 100	PK	1

Electrolytic Copper Solderless Lugs*

Our solder less lugs are manufactured from high strength pure electrolytic copper to insure both maximum strength and conductivity.



CATALOG NO.	DESCRIPTION	WIRE RANGE	AMP RATING	UOM	ORDER MULTIPLE
PI227	Medium Lug for copper wire, pack of 6	6-14	35-50	PK	1
PI228	Large Lug for copper wire, pack of 6	4-14	70	PK	1

Split Bolt Connectors*

These connectors are made of silicone bronze and are designed for copper use only.



CATALOG NO.	DESCRIPTION	MAX. SOLID WIRE	MAX. STRANDED WIRE	UOM	ORDER MULTIPLE
PI326	Split Bolt Connector, pack of 3	10	12	PK	1
PI327	Split Bolt Connector, pack of 3	8	8	PK	1
PI328	Split Bolt Connector, pack of 3	6	7	PK	1
PI929	Split Bolt Connector, pack of 3	4	5	PK	1

Ground Fitting Clamp*

A ground fitting clamp is ideal for surface mounting small amounts of electrical wiring or communication cables.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI237	For 8, 6, 4 bare grounding wire; fits 1/2"-1" pipe	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.
 **Neon bulb incorporates G2B lamp and resistor.
 † Neon bulb incorporates T2B lamp and resistor.

ELECTRICAL



Motors	72-75
Motor Brackets	76
Whips	76-77
DiversiTech Electrical Disconnects	77
Eaton Electrical Disconnects	78
Conduit, Fittings, Cable	78-79
Hard Start Kits	80
Contactors	80
Fan Centers	80
Fuses	81-82
Time Delays	83
Monitors	83
Surge Protectors	84
Electrical Supplies	84-87
Electrical Tapes	88-89
Terminals, Connectors	89-90
Thermal Controls	91
Thermostats	91
Thermostat Guards	92
Thermostat Wire	92-93
Stranded Copper THHN Wire	93-94
Wire Connectors	94-95
Wire/Cable Ties, Mounts, Clamps	95-96

MOTORS

Wagner® Single Speed Condenser Fan Motors

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Drain Holes with Plugs in both end plates
- Automatic Thermal Overload Protector
- Standard 48 Frame Motor Casing Size
- Low Power Consumption
- 60 C Ambient Design
- Electrically Reversible
- Continuous Air Over
- Class B Insulation
- Quiet Operation
- Extended Studs
- 30" Leads
- 60 HZ



BALL BEARINGS NOW STANDARD



CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE
WG840727	1/6	208-230	1075/1	1.3	EA	1
WG840728	1/4	208-230	1075/1	2.2	EA	1
WG840729	1/3	208-230	1075/1	2.8	EA	1
WG840730	1/2	208-230	1075/1	4.2	EA	1
WG840731	3/4	208-230	1075/1	4.5	EA	1
WG840203	1/6	208-230	825/1	1.3	EA	1
WG840204	1/4	208-230	825/1	1.5	EA	1
WG840205	1/3	208-230	825/1	2.2	EA	1
WG840746	1/2	208-230	825/1	2.9	EA	1

Wagner® Multiple Horsepower Condenser Fan Motors

The Multi-Horsepower motors are specially designed to cover a range of applications. The condenser fan motors range from 1/2 to 1/5; 1/3 to 1/6 both at 1075 rpm; 1/3 to 1/6 at 825rpm. These motors feature reversing plugs, extended thru bolts 36 inch leads and are designed for 370 volt capacitors. Installs with all 48 frame mounting brackets.



BALL BEARINGS NOW STANDARD



CATALOG NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE
WG840458	CF	208-230	1075/1	1/3-2.8	1/4-1.8	1/5-1.7	1/6-1.6	-	EA	1
WG840459	CF	208-230	825/1	1/3-2.1	1/4-1.55	1/5-1.4	1/6-1.34	1/8-1.3	EA	1
WG840465	CF	208-230	1075/2	1/3-2.8	1/4-2.0	1/5-1.7	1/6-1.5	-	EA	1
WG840468	CF	208-230	1075/2	1/2-3.0	1/3-2.5	1/4-2.0	1/5-1.3	-	EA	1
WG840469	CF	208-230	825/2	1/3-2.1	1/4-1.7	1/5-1.5	1/6-1.2	-	EA	1

Wagner® Direct Drive Furnace Blower Motors

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Uses 370V Capacitors
- Standard 48 Frame Motor Casing Size
- 2.5" Diameter Hub Rings included
- Low Power Consumption
- Automatic Thermal Overload Protector
- Continuous Duty, Air Over
- Electrically Reversible
- Class B Insulation
- Speed: 1075/3
- Quiet Operation
- 60 HZ

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE
WG840583	1/4	115	1075/3	4.2	EA	1
WG840584	1/4	208-230	1075/3	2.0	EA	1
WG840585	1/3	115	1075/3	5.5	EA	1
WG840586	1/3	208-230	1075/3	2.8	EA	1
WG840587	1/2	115	1075/3	7.5	EA	1
WG840588	1/2	208-230	1075/3	3.6	EA	1
WG840589	3/4	115	1075/3	10.2	EA	1
WG840590	3/4	208-230	1075/3	5.5	EA	1
WG840595	1	115	1075/3	12.6	EA	1
WG840596	1	208-230	1075/3	5.59	EA	1



MOTORS cont'd**Wagner® Multiple Horsepower Furnace Blower Motors**

The Multi-Horsepower motors are specially designed to cover a range of applications. The direct drive furnace blower motors range from 1/2 to 1/6 in both 115 and 230 volts and 3/4 to 1/5 in both 115 and 230 volts all at 1075rpm. These motors feature reversing plugs, extended thru bolts 36 inch leads and are designed for 370 volt capacitors. Installs with all 48 frame mounting brackets.

CATALOG NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE
WG840463	DDFB	115	1075/4	1/2-7.0	1/3-6.7	1/4-4.4	1/5-3.2	1/6-2.4	EA	1
WG840464	DDFB	208-230	1075/4	1/2-3.9	1/3-3.6	1/4-2.5	1/5-1.8	1/6-1.3	EA	1
WG840466	DDFB	115	1075/4	3/4-8.1	1/2-6.6	1/3-4.6	1/4-3.8	1/5-3.1	EA	1
WG840467	DDFB	208-230	1075/4	3/4-3.8	1/2-3.7	1/3-2.5	1/4-1.8	1/5-1.7	EA	1

**Evergreen® CM ECM Motors**

The Evergreen CM is made with the same field-proven, high-efficiency ECM technology that has been used for more than 20 years in new HVAC equipment. It features flexible control methods to help the installer balance airflow in HVAC systems such as VAV (Variable Air Volume) boxes and Packaged HVAC systems. The Evergreen CM is designed as a direct replacement for OEM (Original Equipment Manufacturer) Genteq model X13 (Constant Torque ECM) or as a field replacement for existing PSC (Permanent Split Capacitor) motors.

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	RPM	SHAFT	UOM	ORDER MULTIPLE
6703CM	1/3	208-230/277	5/PWM	2.8	1075	.5"X4" (3.5" SF)	EA	1
6705CM	1/2	208-230/277	5/PWM	4.1	1075	.5"X4" (3.5" SF)	EA	1
6707CM	3/4	208-230/277	5/PWM	6.0	1075	.5"X4" (3.5" SF)	EA	1
6710CM	1	208-230/277	5/PWM	7.6	1075	.5"X4" (3.5" SF)	EA	1

**Evergreen® EM ECM Motors**

The Evergreen EM was designed to replace direct-drive blower motors in residential and light commercial indoor furnaces, air handlers and package systems that were designed with a standard ECM motor, such as X13 or equivalent competitor model. It can also be used to retrofit PSC motors in commercial building series VAV boxes and packaged heat pump systems. It is NOT intended to replace premium ECM constant airflow products, such as EON, 2.3, 3.0 and 2.5.

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	RPM	SHAFT	UOM	ORDER MULTIPLE
6103E	1/3	115	5/PWM	4.8	1075	.5" X 5" (4.5" SF)	EA	1
6105E	1/2	115	5/PWM	6.8	1075	.5" X 5" (4.5" SF)	EA	1
6107E	3/4	115	5/PWM	8.4	1075	.5" X 5" (4.5" SF)	EA	1
6110E	1	115	5/PWM	10.9	1075	.5" X 5" (4.5" SF)	EA	1
6203E	1/3	208/230	5/PWM	2.8	1075	.5" X 5" (4.5" SF)	EA	1
6205E	1/2	208/230	5/PWM	4.1	1075	.5" X 5" (4.5" SF)	EA	1
6207E	3/4	208/230	5/PWM	6.0	1075	.5" X 5" (4.5" SF)	EA	1
6210E	1	208/230	5/PWM	7.6	1075	.5" X 5" (4.5" SF)	EA	1



MOTORS cont'd

Evergreen® IM ECM Motors

The Evergreen IM is an ECM designed to replace an existing PSC (Permanent Split Capacitor), direct drive, indoor blower motor. It is constructed with more than 20 years of proven ECM technology and reliability.

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	RPM	SHAFT	UOM	ORDER MULTIPLE
6005	1/2 (1/2, 1/3, 1/4)	115/230	5	6.7/4.0	1075	.5" X 5" (4.5" SF)	EA	1
6010	1 (1, 3/4, 1/2)	115/230	5	11.0/6.7	1075	.5" X 5" (4.5" SF)	EA	1



Evergreen® OM ECM Motors

The Evergreen Outdoor Motor, also known as Evergreen OM, is designed for direct-drive fan propeller applications in residential systems up to 5-tons. Easily replaces 6 Pole (1,100 rpm rated) and 8 pole (850 rpm rated) shaded pole or PSC motors.

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	RPM	SHAFT	UOM	ORDER MULTIPLE
6301	1/5	208-240	2	2.8	850/1100	.5" X 3" (2.5" SF)	EA	1
6303	1/3	208-240	2	3.5	850/1100	.5" X 3" (2.5" SF)	EA	1
6903	1/3	460	2/PWM	1.6	850/1100	.5" X 6" (5.5" SF)	EA	1
6905	1/2	460	2/PWM	2.5	850/1100	.5" X 6" (5.5" SF)	EA	1



Evergreen® InTune™ Programmer for ECM Motors

InTune is two components - a WIFI programmer (catalog #5K006) that connects in series with the motors existing connections and a free app. The WIFI programmer is purchased once and re-used on each motor during the tuning process. Free apps are available at the App Store and Google Play.

CATALOG NO.	Description	UOM	ORDER MULTIPLE
5K006	Evergreen InTune™ WIFI Programmer	EA	1




MOTORS cont'd

Fasco® OEM Replacement Draft Inducers

Designed, engineered and life-tested in the USA by FASCO. OEM approved for aftermarket replacement.

- Performance to match the original design.
- Fit for proper operation of the safety pressure switch and condensate management system.
- UL recognized, CSA or cUL certified.
- Safety for your customers and your business.

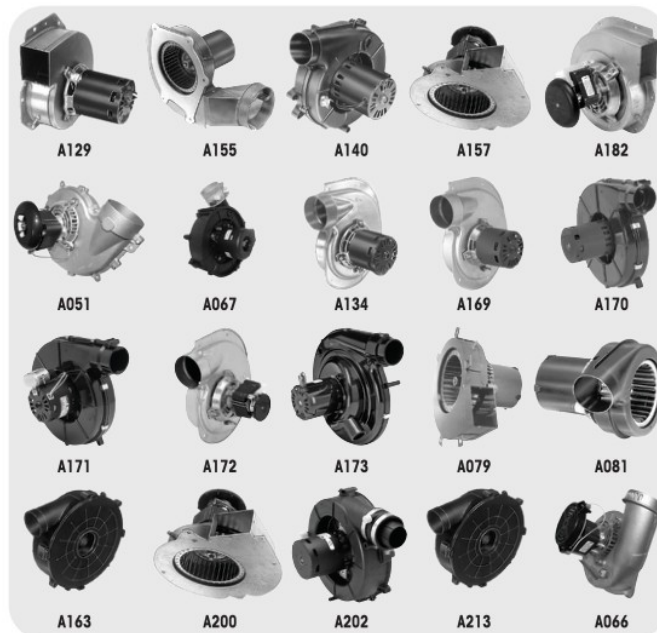

CATALOG NO.	HP	VOLTAGE	SPEED	AMPS	TYPE	RPM	ROT.	BRNG.	FRAME	OEM CROSS REFERENCE	UOM	ORDER MULTIPLE
AMANA												
A129	1/20	115	1	1.95	SP	3250	CW	SLV	3.3	Amana, 7021-9064, 7021-9259	EA	1
ARMSTRONG												
A155	1/30	115	1	1.4	SP	3000	CCW	BALL	3.3	7021-10046	EA	1
GOODMAN												
A140	1/50	115	1	1.4	SP	3400	CW	SLV	3.3	7021-9087, 7021-9000	EA	1
A157	1/35	115	1	1.3	SP	3000	CCW	SLV	-	7002-2307	EA	1
A182	1/35	115	1	1.2	SP	3125	CCW	SLV	3.3	7002-3036, B4059000	EA	1
INTERCITY PRODUCTS												
A051	1/60	115	1	1.6	SP	3000	CW	BALL	-	1013833, J238-1393	EA	1
A067	1/20	115	1	2.6	SP	3000	CW	BALL	3.3	1014338 119225-00	EA	1
A134	1/25	115	1	1.5	SP	3060	CW	SLV	3.3	7021-9335, 7021-8735, 7021-9499, 7021-8736	EA	1
A169	1/25	230	1	0.75	SP	2800	CW	SLV	3.3	7021-10048, 7021-10580	EA	1
A170	1/25	115	1	2.3	SP	3400	CCW	BALL	3.3	7021-10702, 7021-10299	EA	1
A171	1/25	115	1	0.7	PSC	3450	CCW	BALL	3.3	7062-4783, 10111412	EA	1
A172	1/35	115	1	1.6	SP	3000	CW	BALL	-	7002-2792, 1010975P	EA	1
A173	1/18	115	1	0.8	PSC	3450	CCW	BALL	3.3	7062-4578, 1011350	EA	1
JANITROL												
A079	1/50	115	1	1.1	SP	3000	CCW	SLV	3.3	7062-6804	EA	1
JOHNSON FURNACE												
A081'	1/40	230	1	0.5	SP	3000	CCW	BALL	3.3	HWC Series Unit	EA	1
LENNOX												
A163	1/20	115	1	1.8	SP	3400	CCW	BALL	3.3	7021-9450	EA	1
A200	1/30	115	1	1.95	SP	3000	CCW	BALL	-	7002-2975, 31L5501	EA	1
A202	1/30	115	1	1.8	SP	3400	CCW	BALL	3.3	7021-10602, 45037-001	EA	1
A213	1/25	115	2	2.1	SP	3200	CCW	BALL	3.3	7021-10376, 18L0401	EA	1
RHEEM-RUUD												
A066	1/30	120	1	1.27	SP	3000	CW	BALL	3.3	70-24157-03, 117847-00	EA	1

All rotation is determined by looking at shaft end.
 Note: 1. 3-1/2" motor body length

MOTOR BRACKETS

DiversiTech® Motors Bracket

These brackets help hold the motor securely.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DMB-1	Fixed Lug Assembly for 5-1/2" diameter motors	EA	1
DMB-2	Adjustable Lug Assembly for 5-1/2" diameter motors	EA	1

Motor Mount – Flex Bracket

Torsion Flex Bracket holds motor securely. Fits 5-1/2" motors. Typically used for Goodman equipment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DMB-3	5-1/2" Motor Mount Torsion Flex Bracket	EA	1

WHIPS

DiversiWhips

Liquid tight flexible conduit system. A labor saving convenience kit for A/C unit hookup. Also use for heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting. Three distinct wire colors for ease of hook up. 1 straight and 1 90 degree metallic or non metallic connector. 90 degree connector is removable for straight connections. (Second straight connector not included.) U.L. and C.U.L Listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-4	1/2" x 4' #10 THHN Wire – Metallic Connectors	EA	6
6-12-6	1/2" x 6' #10 THHN Wire – Metallic Connectors	EA	6
6-34-4	3/4" x 4' #8 THHN Wire – Metallic Connectors	EA	6
6-34-6	3/4" x 6' #8 THHN Wire – Metallic Connectors	EA	6
6-34-8	3/4" x 8' #8 THHN Wire – Metallic Connectors	EA	3
6-12-4NM	1/2" x 4' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-12-6NM	1/2" x 6' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-34-4NM	3/4" x 4' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-6NM	3/4" x 6' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-8NM	3/4" x 8' #8 THHN Wire – Non-Metallic Connectors	EA	3
6-12-6NMS	1/2" x 6' #10 THHN Wire – 2 Non-Metallic Straight Connectors	EA	6
6-34-6NMS	3/4" x 6' #8 THHN Wire – 2 Non-Metallic Straight Connectors	EA	6
6-12-6NM-2	1/2" x 6' #10 THHN Wire, 2-piece Non-Metallic Connectors	EA	6
6-34-6NM-2	3/4" x 6' #8 THHN Wire, 2-piece Non-Metallic Connectors	EA	6

*For DiversiWhips produced with 2 straight connectors, add S to part number (ex: 6-12-4S).

DiversiWhips Pallet Packs

DiversiWhips are now available in a convenient, bulk packaged pallet pack at a discounted price. Pallet pack makes an attractive floor standing display. 1 straight and 1 90 degrees metallic or non metallic connector.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B6-12-4	1/2 x 4' #10 THHN Wire – Metallic Connectors	EA	90
B6-12-6	1/2 x 6' #10 THHN Wire – Metallic Connectors	EA	60
B6-34-6	3/4 x 6' #8 THHN Wire – Metallic Connectors	EA	45
B6-12-4NM	1/2 x 4' #10 THHN Wire – Non-Metallic Connectors	EA	90
B6-12-6NM	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	60
B6-34-4NM	3/4 x 4' #8 THHN Wire – Non-Metallic Connectors	EA	60
B6-34-6NM	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	45

Evaporator Cooler Whip

A whip designed for labor saving convenience when hooking up an evaporative cooling unit. A 10 ft. whip with 5 distinctly colored wires. One straight and one 90 degree non-metallic connector included.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-10NM-EVAP	Evaporator Cooler Whip	EA	5

DiversiWhips with Extended Length Wires

DiversiWhips are available with extra long lead wires for those difficult to wire applications. These whips offer 10in. of lead wire on the straight side and 18in. of lead wire on the 90 degree side.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-6NMR	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-34-6NMR	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	6

WHIPS cont'd

DiversiWhip - Up to 30 Amp

An economical whip for applications up to 30 Amp. A labor saving convenience kits for A/C hookup, heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting. One straight and one 90 degree non-metallic connector included.



6-12-6NMP

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-6NMP	1/2" x 6' #12 THHN Wire – Non-Metallic Connectors, Up to 30 Amp	EA	6

DiversiWhips for the Swimming Pool Industry

A labor saving kit for hookup of swimming pool motors, pumps, filters, and timers. Three distinct wire colors for ease of hookup. 1 straight and 1 90 degree non-metallic connector included.



6-12-4NMSWP

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-4NMSWP	1/2" x 4' #10 THHN Wire – In Box	EA	6
6-12-6NMSWP	1/2" x 6' #10 THHN Wire – In Box	EA	6
6-34-4NMSWP	3/4" x 4' #8 THHN Wire – In Box	EA	6
6-34-6NMSWP	3/4" x 6' #8 THHN Wire – In Box	EA	6

Solid Wire Whips

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-4NMSWP	1/2" x 4' #12 Solid 3 Wire – Non-Metallic Conn.	EA	6
6-12-6NMSWP	1/2" x 6' #12 Solid 3 Wire – Non-Metallic Conn.	EA	6
6-12-8NMSWP	1/2" x 8' #12 Solid 3 Wire – Non-Metallic Conn.	EA	3

DIVERSITECH ELECTRICAL DISCONNECTS

Disconnects—Metal Case

Fused model designed with fuses in pull out handle for easy replacement. The line, load, and ground terminals are aligned for ease of wiring. The fused models have indicator lights for blown fuses. This is rain tight and sleet resistant. The UL Listed number is IRF9, NEMA Type 3R and the US Patent is 6,630,637.



DDS-60

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DDS-30	30A Fusible Disconnect Switch	EA	10
DDS-60	60A Fusible Disconnect Switch	EA	10
DDS-60U	60A Non-Fusible Disconnect Switch	EA	10

Low Profile Disconnects—Metal Case

This low profile disconnect switch is a slightly smaller design than that of the standard DiversiTech disconnects. This has a side opening door with a full dead front. This is rain tight and sleet resistant. The UL Listed number is IRF9, NEMA Type 3R.



EDS-60U

EDS-12-6NM

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
EDS-60U	60A Non-Fusible Disconnect Switch	EA	10
EDS-12-6NM	Disconnect and Whip Combo Kit	EA	3

Disconnects—Non-Metallic Case

This 60 amp non-fusible disconnect is housed in a lightweight, non-metallic case. It features a side opening door with more than 180° access, full dead front, and a locking tab.



750-P60NF

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-P60NF	60A Non Fusible Disconnect Switch, Non-Metallic Case, Plastic	EA	10

Molded Case Switch Disconnect

The DDS-60SW Molded Case Switch Disconnect is rugged and easy to use like an ordinary light switch. It eliminates the pullout handle used in traditional AC disconnects and is easy to install. It is UL listed and rated for inoor and outdoor applications with NEMA 3R rating.



DDS-60SW

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DDS-60SW	Molded Case Switch Disconnect, 60A 240 VAC	EA	10

3 Pole Switch for Mini-Splits

Three-pole, 30 Amp, 600 Volt rated disconnect switch provides safe, reliable manual ON/OFF switching control for Mini-splits and HVAC systems. This switch meets the local code requirements of breaking both the power lines (L1 and L2) and the communication line of the mini-split's indoor unit for service.



755-303SW

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
755-303SW	3 Pole Switch for Mini-Splits	EA	1

EATON ELECTRICAL DISCONNECTS

Eaton Switch A/C Disconnect

This A/C Disconnect is 60 amps switch rated for 10 HP motors at 240VAC. The switch is an on off circuit breaker with no pull out head that could be lost or stolen. It has easy-to-remove front cover with no screws or fasteners to remove.



DPB222R



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DPB222R	60A molded case switch	EA	1

Eaton Three Phase Disconnects

These disconnects are UL listed and meet UL 98 for enclosed switches and NEMA Std. KS-1. They are suitable as service entrance equipment when applied with neutral or ground lug kit. They come with rainproof NEMA 3R enclosure.



DG322NRB



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DG321NRB	Fusible 30 Amp, 240VAC	EA	1
DG322NRB	Fusible 60 Amp, 240VAC	EA	1
DG322URB	Non-fusible 60 Amp, 240VAC	EA	1

CONDUIT, FITTINGS, CABLE

DiversiTech™ Flexible Conduit

For electrical applications: outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut. Impact resistant, chemical resistant, and will not kink. U.L. and C.U.L. Listed. For use as indicated in Article 351 of the 1987 NEC.



750-12100

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-38100	3/8" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-12100	1/2" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-500	1/2" x 100' Liquid Tite Conduit – Metallic, 100' per roll	EA	1
750-34100	3/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-600	3/4" x 100' Liquid Tite Conduit – Metallic, 100' per roll	EA	1
750-10100	1" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-125100	1-1/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-1550	1-1/2" x 50' Liquid Tite Conduit – Non-Metallic, 50' per roll	EA	1
750-2050	2" x 50' Liquid Tite Conduit – Non-Metallic, 50' per roll	EA	1
750-10500	1" x 500' Liquid Tite Conduit – Non-Metallic, 500' per roll	EA	1
750-121000	1/2" x 1000' Liquid Tite Conduit – Non-Metallic, 1000' per roll	EA	1
750-34800	3/4" x 800' Liquid Tite Conduit – Non-Metallic, 800' per roll	EA	1

Single Piece Liquid Tite Fittings

Conduit threads onto ferrule and up inside the outer body. An inside taper squeezes down on the outside of conduit for a superior liquid tight seal. The cut portion of the conduit does not show, giving a more finished appearance. Easy to use at a lower cost than regular liquid tite fittings.



750-SLTC9050

750-SLTC50

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-SLTC50	1/2" Straight Screw-On Fitting	EA	25
750-SLTC9050	1/2" 90° Screw-On Fitting	EA	25
750-SLTC75	3/4" Straight Screw-On Fitting	EA	25
750-SLTC9075	3/4" 90° Screw-On Fitting	EA	25

Liquid Tite Connectors

For use with metallic and non metallic liquid tite conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulled through. U. L. Listed. C.U.L. Listed.



750-MLT50

750-NMLT50

750-NMLT9050

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-NMLT50	1/2" Non-Metallic Straight Connector	EA	25
750-NMLT4550	1/2" Non-Metallic 45 Degree Elbow Connector	EA	10
750-NMLT9050	1/2" Non-Metallic 90 Degree Elbow Connector	EA	10
750-NMLT75	3/4" Non-Metallic Straight Connector	EA	10
750-NMLT4575	3/4" Non-Metallic 45 Degree Elbow Connector	EA	10
750-NMLT9075	3/4" Non-Metallic 90 Degree Elbow Connector	EA	10
750-NMLT100	1" Non-Metallic Straight Connector	EA	5
750-NMLT90100	1" Non-Metallic 90 Degree Elbow Connector	EA	5
750-MLT50	1/2" Metallic Straight Connector	EA	25
750-MLT9050	1/2" Metallic 90 Degree Elbow Connector	EA	10
750-MLT75	3/4" Metallic Straight Connector	EA	10
750-MLT9075	3/4" Metallic 90 Degree Elbow Connector	EA	10
750-NMLT125	1-1/4" Non-Metallic Straight Connector	EA	1
750-NMLT150	1-1/2" Non-Metallic Straight Connector	EA	10
750-NMLT90125	1-1/4" Non-Metallic 90 Degree Elbow Connector	EA	1
750-NMLT5090-F	1/2" Non-Metallic Adjustable Connector	EA	10
750-NMLT7590-F	3/4" Non-Metallic Adjustable Connector	EA	10
750-TZNMLT200	2" NM Topaz	EA	2
750-TZNMLT150	1-1/2" NM Topaz	EA	5
750-TZNMLT90150	1-1/2" NM Topaz 90 Degree	EA	2
750-TZNMLT125	1-1/4" NM Topaz	EA	5
750-TZNMLT90125	1-1/4" NM Topaz 90 Degree	EA	2
750-TZNMLT100	1" NM Topaz	EA	5
750-TZNMLT90100	1" NM Topaz 90 Degree	EA	5
750-TZNMLT38	3/8" NM Topaz	EA	10
750-TZNMLT9038	3/8" NM Topaz 90 Degree	EA	25
750-TZNMLT9050	1/2" NM Topaz 90 Degree	EA	10
750-TZNMLT9075	3/4" NM Topaz 90 Degree	EA	10

CONDUIT, FITTINGS, CABLE cont'd

Two-Piece Liquid Tite Fittings

These 2-piece Liquid Tite compression fittings are for use with non-metallic Type B Liquid Tite conduit to terminate and seal conduit to enclosures. Easy to use with no disassembly required, cULus listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-2LTC50	1/2" Straight, 2-piece Compression, Non-Metallic, Liquid-Tite Fitting	EA	25
750-2LTC9050	1/2" 90°, 2-piece Compression, Non-Metallic, Liquid-Tite Fitting	EA	25
750-2LTC75	3/4" Straight, 2-piece Compression, Non-Metallic, Liquid-Tite Fitting	EA	25
750-2LTC9075	3/4" 90°, 2-piece Compression, Non-Metallic, Liquid-Tite Fitting	EA	25

Romex Connectors – Metallic

These Metallic Romex Connectors are made of zinc die cast are cable connectors for Romex wire. U.L. Listed C.S.A. Approved.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-RC841	3/8" Romex Connector for 1/2" Knockouts	EA	100
750-RC842	3/4" Romex Connector for 3/4" Knockouts	EA	50

U.L. Listed and C.S.A. Approved.

BX Set Screw Connectors

These connectors are for BX cable range of .445 to .630 in diameter. This product is UL listed and CSA approved.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-845	Trade Size – 3/8"	EA	100

Non-Metallic Sheathed Cable (Romex Wire)

600V building wire. Easy to pull and strip, flame and moisture resistant. Saves time, labor and money. Color coded conductors of copper, PVC insulation and outer jacket with ground. U.L. Listed 719 Federal Specifications J C94.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-6-2	6 AWG, 2 Conductors with Ground – 125' per pack	EA	1
620-8-2	8 AWG, 2 Conductors with Ground – 125' per pack	EA	1
620-10-2	10 AWG, 2 Conductors with Ground – 250' per pack	EA	1
620-12-2	12 AWG, 2 Conductors with Ground – 250' per pack	EA	1
620-14-2	14 AWG, 2 Conductors with Ground – 250' per pack	EA	1

U.L. Listed 719 Federal Specifications J-C94.

Aluminum Armored MC Cable

90° C Rated aluminum metal clad cable system. THHN solid copper with specially compounded heat-resistant U.L. Listed insulation and jacket. Flexible interlocked aluminum armor. Extremely durable – withstands severe handling. U.L. Listed #4. Conforms to NEC article 333.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-122	12-2 Aluminum Armored MC Cable – 100' per roll	EA	1
640-142	14-2 Aluminum Armored MC Cable – 100' per roll	EA	1

EMT (Thinwall) Fittings

These are used to join EMT conduit to boxes on enclosures.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-800	Set Screw Connector – 1/2"	EA	50
625-801	Set Screw Connector – 3/4"	EA	25
625-304	Strap – One Hole – 1/2"	EA	100
625-305	Strap – One Hole – 3/4"	EA	100
625-810	Set Screw Coupling – 1/2"	EA	50
625-811	Set Screw Coupling – 3/4"	EA	25

Cable Staples

Cable Staples for NMB Cable (Romex) and Copper Insulated Staples for thermostat wire.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-183	Romex Staples – 1/2", pack of 100	PK	1
625-IS5	Copper Insulated #5 Staples for T-Stat Wire	EA	100

Top Opening Metal Case

Top opening metal cases feature a large internal wiring space, aligned line, load, and ground terminal, and rear, bottom, and side entry knockouts for ease of installation and wiring. The housing is NEMA Type 3R and features a folding pivot locking tab.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PD60NF	Non Fused - 60A	EA	6
PD30F	Fused - 30A	EA	6
PD60F	Fused - 60A	EA	6

HARD START KITS

Torque Plus—Hard Start Kits

Totally solid state, our DST 5 is just right for all permanent split capacitor (PSC) compressors from 1/2 to 10 H.P. It can be used on units that operate on 120 through 288 Volts. The DST 6 offers a larger capacitor for severely hard to start compressors. The DST 6 can be used on all PSC single phase compressors from 1 1/2 to 10 H.P. A unique combination of relay and safety timer. The capacitor is automatically disconnected in 0.5 seconds if the compressor fails to start.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DST-5	Torque Plus – 300% Torque Multiplier	EA	1
DST-6	Torque Plus – 500% Torque Multiplier	EA	1

DiversiTech Hard Start Kits

DiversiTech hard start kits reduce contractor call backs by boosting the starting capacitor for a compressor. This prevents home brownouts and improves homeowner satisfaction with your service. DiversiTech's hard start kits feature a potential relay that disconnects the start capacitor from the circuit at exactly the moment it is no longer needed to boost the compressor. This results in a precision compressor start even under hard starting conditions. Replaces the Kickstart KS-1 and the 5-n-1 kit.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HSK1	Hard Start Kit for 3.5 to 5HP Compressor	EA	1
HSK5	Hard Start Kit for 1 to 3HP Compressor	EA	1

CONTACTORS

Eaton Contactor Accessories

These auxiliary contacts are side mounted contact kits for Eaton's definite purpose contactors with contact rating of 15A to 75A.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DPEAUX10	15-75A, 1NO	EA	1
DPEAUX11	15-75A, 1NO-1NC	EA	1
DPEAUX11QC	15-75A, 1NO-1NC with Quick Connect	EA	1
DPEAUX22	25-75A, 2NO-2NC	EA	1

FAN CENTERS

Fan Centers

The fan centers offer low voltage for one and two speed fan motors; auxiliary circuits in heating cooling, or heating/ cooling applications. This has a DPDT Relay and is UL rated. There are color coded pre stripped leads on this center. This product has a 24V coil voltage, power, and duty rated contacts. It mounts directly to a 4in. electrical box.



CATALOG NO.	VOLTAGE	UOM	ORDER MULTIPLE
D-90113	120	EA	1
D-90118	208/240	EA	1

FUSES

Dual Element Fuses – 250V

Provides time delay for temporary over current conditions and motor running protection for heating and air conditioning equipment. Eliminates unnecessary maintenance from harmless overloads. U.L. Class RK 5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.



7-CRNR40

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-CRNR15	15 Amps	EA	10
7-CRNR20	20 Amps	EA	10
7-CRNR25	25 Amps	EA	10
7-CRNR30	30 Amps	EA	10
7-CRNR35	35 Amps	EA	10
7-CRNR40	40 Amps	EA	10
7-CRNR45	45 Amps	EA	10
7-CRNR50	50 Amps	EA	10
7-CRNR60	60 Amps	EA	10
7-CRNR70	70 Amps	EA	5
7-CRNR80	80 Amps	EA	5
7-CRNR90	90 Amps	EA	5
7-CRNR100	100 Amps	EA	5

U.L. Class RK-5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

Time Delay Fuses – 600V

These plugs offer safe protection during momentary overload. No adapter necessary. U.L. Listed., Class RK5



626-HASR15

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-HASR10	10 Amp	EA	10
626-HASR15	15 Amp	EA	10
626-HASR20	20 Amp	EA	10
626-HASR25	25 Amp	EA	10
626-HASR30	30 Amp	EA	10
626-HASR40	40 Amp	EA	10
626-HASR60	60 Amp	EA	10

U.L. Listed.

Plug Fuses

Expels gases caused by the blowing fuse, but doesn't allow flame to escape. Glass top for safety against shock. Positive visual indication of OK condition or blown condition. Distinguishes between overload and dead short conditions. Magnifying center of face. Shapes of face openings identify ratings. Meets Federal Specification WF 791E/Gen. Type 791/1. Base "W" fuses. U.L. Listed.



626-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-15	Plug Fuse Type TL – 15 Amp	EA	4
626-20	Plug Fuse Type TL – 20 Amp	EA	4
626-25	Plug Fuse Type TL – 25 Amp	EA	4
626-30	Plug Fuse Type TL – 30 Amp	EA	4

U.L. Listed.

One Time Fuses

Protection to lighting, heating, and other non transient circuits. U.L. Class K5, Standard for Safety 1988, One Time Fuse Interrupting Rating 10,000 Amps. rms. A.C., 250 VAC/VDC



7-10KOTN40

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-10KOTN30	30 Amps	EA	10
7-10KOTN35	35 Amps	EA	10
7-10KOTN40	40 Amps	EA	10
7-10KOTN45	45 Amps	EA	10
7-10KOTN50	50 Amps	EA	10
7-10KOTN60	60 Amps	EA	10
7-10KOTN70	70 Amps	EA	5
7-10KOTN80	80 Amps	EA	5
7-10KOTN90	90 Amps	EA	5
7-10KOTN100	100 Amps	EA	5

U.L. Class K5, Standard for Safety 1988, One Time Fuse Interrupting Rating 10,000 Amps. rms. A.C.

Time Delay Plug Fuses

These plugs offer safe protection during momentary overload. No adapter necessary. U.L. Listed.



626-30T

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-10T	Type "T" Plug Fuse – 10 Amp	EA	4
626-15T	Type "T" Plug Fuse – 15 Amp	EA	4
626-20T	Type "T" Plug Fuse – 20 Amp	EA	4
626-25T	Type "T" Plug Fuse – 25 Amp	EA	4
626-30T	Type "T" Plug Fuse – 30 Amp	EA	4

U.L. Listed.

Type "S" Non-Tamper Fuses

Provides specific overcurrent protection. Time delay element protects against premature blowing from motors in air conditioners or compressors. Visual indication of good or blown condition. U.L. Listed. C.S.A. Approved.



626-30S


CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-6S	Type "S" Fuse – 6.25 Amp	EA	4
626-10S	Type "S" Fuse – 10 Amp	EA	4
626-15S	Type "S" Fuse – 15 Amp	EA	4
626-20S	Type "S" Fuse – 20 Amp	EA	4
626-30S	Type "S" Fuse – 30 Amp	EA	4

U.L. Listed. C.S.A. Approved.

FUSES cont'd

In-Line Fuse Holder

For fusing all control circuits up to 30 amp. Features rigid plastic protective covering for each fuse. Used on AC and DC circuits. U.L. Listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FH-1	In-Line Fuse Holder, Pack of 10	EA	1

U.L. Listed.

Blade (Auto) Fuses

These fuses are fast acting low voltage supplementary fuses, automotive blade style fuse.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-AT0003	Blade Fuse – 3 Amp – Purple, pack of 5	EA	100
626-AT0005	Blade Fuse – 5 Amp – Tan, pack of 5	EA	100

EasyID® Blade Fuses

The EasyID® series of illuminating blade fuses use Light Emitting Diode (LED) technology to indicate that a fuse has opened, making it easy to spot the opened fuse in a dark control panel. It makes it easy for a contractor to troubleshoot a problem and save time.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-AT03LED	EasyID® Blade Fuse – 3 Amp – Violet, pack of 5	EA	100
626-AT05LED	EasyID® Blade Fuse – 5 Amp – Tan, pack of 5	EA	100

Fuse Adapters

Fuse adapters are used to retrofit fuses into existing installations.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-38632	Fuse Adapter – 60 to 30 Reducer for Class H, 250V	EA	1
626-38636	Fuse Adapter – 60 to 30 Reducer for Class H, 600V	EA	1

Fuse Pullers

Our fuse pullers are used to safely pull fuses.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-38071	Fuse Puller – For Fuse Sizes 1/4" to 1/2"	EA	1
626-38073	Fuse Puller – For Fuse Sizes 1" to 1-3/4"	EA	1

Box Cover Units

The maximum amps on this box cover unit are 15 and the maximum AC voltage of 125. These units are designed for use with the Type T plug fuses. U.L. Listed and C.S.A. Certified.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-608	Switch/Fuse Combo (ESSU)	EA	1
620-6081	Plug Fuse Base Only (ESOU)	EA	1
620-6082	Receptacle/Fuse Combo (ESRU)	EA	1
620-6083	Switch/Fuse Combo Square (ESSY)	EA	1

U.L. Listed and C.S.A. Certified.

Fuseblocks

The fuse blocks are designed to allow the fuse to blow or burn out before the component can be damaged.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-23133	Fuseblock – 1 Pole Screw Class H, 250V	EA	1
626-26311	Fuseblock – 3 Pole Box Lug Class H, 250V	EA	1

TIME DELAYS

Adjustable Delay on Break Timer

Adjusts from 6 seconds to 8 minutes. Spin-proof knob. Works with 24, 120 or 240 VAC control circuits. Supports up to 1.0 Amps. Two wire hookup for easy installation. Solid state with quick disconnect terminals. Mounts with one self-tapping screw. Conformal coated circuitry protects against moisture and shock. UR recognized for USA and Canada. Works with anticipator type thermostats.

HOW IT WORKS: Immediately upon application of power, the Delay on Break timer enables circuit operation. Once power is interrupted, the circuit opens for the time set on the dial. After the time period elapses, the circuit closes, allowing the protected motor or compressor to start. For typical HVAC applications, the operation of the timer is transparent and will go unnoticed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ADB-1	Adjustable Delay on Break	EA	1
ADB-2	Adjustable Delay on Break w/Wire Leads	EA	1

Adjustable Delay on Make Timer

Ideal for random starting of multiple units. Adjusts from 6 seconds to 8 minutes. Spin proof knob. Works with 24, 120 or 240 VAC control circuits. Supports up to 1.0 Amps. Two wire hookup for easy installation. Solid state with quick-disconnect terminals. Mounts with one self-tapping screw. Conformal coated circuitry protects against moisture and shock. UR recognized for US and Canada. Works with anticipator type thermostats.

HOW IT WORKS: These timers delay circuit closure upon application of power. Only after the set time period elapses and power remains ON will the circuit close, allowing the protected motor or compressor to start. For typical HVAC installations, timers are adjusted to random times to prevent power circuit overloads, thus are often called random start timers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ADM-1	Adjustable Delay on Make	EA	1
ADM-2	Adjustable Delay on Make w/Wire Leads	EA	1

MONITORS

Digital Three Phase Line Voltage Monitor

Offers continuous protection against voltage anomalies which can damage compressors, motors and other sensitive electrically operated devices.

PROTECTION: Loss of Phase, Phase Reversal, Voltage Imbalance, Low Voltage, High Voltage

DISPLAY: Large custom LCD display indicates all operating conditions at a glance. Three large sets of digits provide easy system troubleshooting.

VOLTMETER: Three independent voltmeters read both line and contactor load (backside) voltages.

MONITORED VOLTAGE: 160 to 600 Volts 50-60 Hz.

POWER SUPPLY: Power for the WPC-500 is automatically derived from any active phase. System operation is not dependent on the control voltage or a specific phase for power.

CONTROL VOLTAGE: 19-277 VAC. Anticipator load is provided for operation with 24 volt electronic and mechanical thermostats.

OPERATING VOLTAGE SET POINT: 175 to 650 VAC. Digitally adjustable in one volt increments.

VOLTAGE TRIP POINT: Adjustable in 1% increments between 6% and 18% of selected operating voltage. Restart voltage set point (hysteresis) fixed at cutout voltage + 3%.

VOLTAGE SYMMETRY: Adjustable imbalance trip point from 2% to 25% of selected operating voltage.

RESPONSE TIMES:
Phase Loss/Reversal: 100 mS max.
Imbalance: Adjustable Response Timer

Over or Under Voltage: Adjustable Response Timer
LOCKOUT DELAY TIMER: Fully adjustable 0 to 720 Seconds (0 to 12 minutes). Digital display shows re- maining time and user set points.

SEQUENTIAL START TIMER: 0 to 30 seconds in one second increments.

RESPONSE TIMER: 0.1 to 20 Seconds. Digital display shows remaining time and user set points.

MEMORY: Up to 25 past fault conditions are stored for later retrieval and analysis. The faults may be displayed or cleared by the front panel buttons.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DTP-3	Digital 3-Phase Motor Protector	EA	1

Digital Single Phase Line Voltage Monitor

Automatic voltage monitor and control system. Continuously measures incoming line voltage, allowing detection of any voltage outside the tolerances that you set. If these limits are exceeded, the response timer begins counting. You may also set response time – a short time for a quick response or a long time to avoid nuisance tripping. If the voltage remains outside the tolerance after the time has elapsed, the DSP-1 will turn off its output relay and protect your device. While output is off, an additional delay timer activates to avoid rapid restarts.

FEATURES:
Digital voltmeter displays instantaneous line voltage;
Automatic voltage tester adjusts from 90 to 300 volts;
Adjustable response timer (0.1 to 10 sec.) prevents nuisance tripping;
Adjustable delay timer (1 to 720 sec.) prevents rapid restarts;
Digital display makes for easy viewing and operation

SPECIFICATIONS:
Voltmeter: 70 to 325 Volts
Voltage Set Point: 90 to 300 Volts
Tolerance Limits: 6 to 18%
Response Timer: 0.1 to 10 seconds
Delay Timer: 1 to 720 seconds
Output Relay: 10 Amps, 250 VAC resistive, single-pole/double-throw
Control Input: 18 to 250 VAC with anticipator load for 24 volt thermostats



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DSP-1	Digital Single Phase Motor Protector	EA	1

SURGE PROTECTORS

Surge-Trap Type 1 STXH

The most compact of the STX series offering, the Surge-Trap® Type 1 STXH meets requirements for UL1449 4th Edition and is suitable for any 120/240VAC split phase application. The STXH Series SPD features TPMOV® technology inside making it the safest product available in its category. Its compact size, performance and reliability are especially ideal for HVAC applications and direct mounting to air condition disconnect switches.



CATALOG NO.	DESCRIPTION	UPC	UOM	ORDER MULTIPLE
STXH120P05	STXH Type 1 50kA 120V Single Phase	0782001472511	EA	1
STXH240S05	STXH Type 1 50kA 240/120V Split Phase	0782001472504	EA	1

Surge-Trap Type 1 STXR

The most popular range in the STX series offering, the Surge-Trap® Type 1 STXR meets requirements for UL1449 4th Edition and is ideal for the replacement of obsolete surge arrestors. The STXR Series SPDs feature TPMOV® technology inside, making them the safest product available. With a small, compact design and line or load installation flexibility, the STXR series is the perfect fit for branch panel and/or individual equipment protection.



CATALOG NO.	DESCRIPTION	UPC	UOM	ORDER MULTIPLE
STXR208Y05N	STXR Type 1 50kA 208Y/120V N-G	0782001469962	EA	1
STXR480Y05N	STXR Type 1 50kA 480V/277V N-G	0782001469986	EA	1
STXR240D05	STXR Type 1 50kA 240V 3-Phase DELTA	0782001469900	EA	1
STXR480D05	STXR Type 1 50kA 480V 3-Phase DELTA	0782001469917	EA	1
STXRM BK	STXR Surge Protector Mounting Bracket Kit	0782001470760	EA	1

ELECTRICAL SUPPLIES

Electrical Toggle Switches

Side wire design with automatic grounding and large binding head terminal screws for fast wiring. Lubricated cam provides smooth lever action. U.L. Listed. C.S.A. Certified. Verified to Federal Spec. WS896E




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-600	20A-1 HP 120V, Single Pole, Brown	EA	10
620-601	20A-1 HP 120V, Single Pole, Ivory	EA	10
625-CS120W	20A-1HP 120V Single Pole, White	EA	10
625-1301W	15A-1/2HP 120V Single Pole, White	EA	10
620-604	15A-1/2 HP 120V, Single Pole, Brown	EA	10
620-605	15A-1/2 HP 120V, Single Pole, Ivory	EA	10

U.L. Listed. C.S.A. Certified. Verified to Federal Spec. WS896E.

Electrical Duplex Receptacles

Automatic grounding for fast installation. Heavy duty mounting strap for additional assembly strength. Copper alloy power/ground contacts for optimum continuity. Side wire design with large binding head terminal screws for fast wiring. U.L. Listed. C.S.A. Certified (NEMA 5 15 Type).

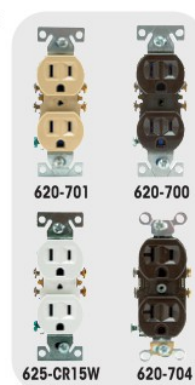

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-700	15A, 125V, Brown	EA	10
620-701	15A, 125V, Ivory	EA	10
625-CR15W	15A 125V, White	EA	10
620-702	20A, 125V, Brown	EA	10
620-703	20A, 125V, Ivory	EA	10
625-CR20W	20A 125V, White	EA	10
620-704	15A, 125V, Brown – Residential	EA	10
620-705	15A, 125V, Ivory – Residential	EA	10
625-270W	15A 125V, White – Residential	EA	10

U.L. Listed. C.S.A. Certified (NEMA 5-15 Type).

Electrical Outlet Boxes, Extensions and Covers

We have 4in. steel square boxes, extensions, and covers available. Conforms to Article 370 of NEC. U.L. Listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-401	2-1/8" Deep, 1/2" and 3/4" K.O.s	EA	25
620-403	1-1/2" Deep, 1/2" K.O.s	EA	50
620-404	1-1/2" Deep, 1/2" and 3/4" K.O.s Extension	EA	50
620-406	Flat Blank Cover	EA	50
620-409	Flat, One Duplex Receptacle Cover	EA	50
620-411	One Switch and One Duplex Receptacle Cover	EA	50

Conforms to Article 370 of NEC. U.L. Listed.

Plastic Wall Plates

Non flammable thermoplastic, phenolic or urea material. Color matched 1/2in. long steel mounting screws furnished. Smooth surface – no recessed areas to collect dirt, discolor. Easy to clean. Full weight and thickness provide high dielectric strength, minimum moisture absorption, impact resistance. Warp resistant, fit flush to wall. U.L. Listed. C.S.A. Approved.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-2132B	Duplex Receptacle Cover – Brown	EA	25
625-2132V	Duplex Receptacle Cover – Ivory	EA	10
625-2132W	Duplex Receptacle Cover – White	EA	10
625-2134V	Single Toggle Cover – Ivory	EA	25
625-2134W	Single Toggle Cover – White	EA	25

U.L. Listed. C.S.A. Approved.

ELECTRICAL SUPPLIES cont'd

Electrical Outlet Boxes, Extensions and Covers

Standard steel utility (Handy) boxes and covers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-200	1-1/2" Deep, 1/2" K.O.s	EA	50
620-201	1-7/8" Deep, 1/2" K.O.s	EA	50
620-202	2-1/8" Deep, 1/2" K.O.s	EA	50
620-252	Flat, Two Duplex Receptacle Cover	EA	100
620-253	Flat, Toggle Switch Cover	EA	100
620-254	Flat Blank Cover	EA	100
620-255	Flat Cover 1/2" K.O.	EA	100

Conforms to Article 370 of NEC. U.L. Listed.

Switch Covers

Our switch covers come with gas, oil, or emergency already printed on them.



CATALOG NO.	SIZE	TYPE	DESCRIPTION	UOM	ORDER MULTIPLE
625-S17	4" X 4"	Gas	4" Square Box	EA	10
625-S16	4-1/4" X 2-3/4"	Gas	Utility/Handy Box	EA	1
625-S15	4-1/2" X 2-1/2"	Gas	Flush Mount	EA	25
625-S14	4" X 4"	Oil	4" Square Box	EA	1
625-S13	4-1/4" x 2-3/4"	Oil	Utility/Handy Box	EA	1
625-S19	4-1/2" X 2-1/2"	Oil	Flush Mount	EA	1
625-S20	4-3/4" X 2-1/2"	Emergency	Switch Plate	EA	1
625-S18	3/4"		Switch Guard (Wall plate/ switch not included)	EA	1

Eaton Circuit Breakers - Type CH

Type CH Circuit Breakers are 3/4-inch per pole plug-on circuit breakers designed for Eaton's Type CH Loadcenters. They are 10 kAIC arc fault circuit interrupters rated for 120VAC or 240VAC applications.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CH115	Single Pole, 15A	EA	10
CH120	Single Pole, 20A	EA	10
CH215	Two Pole, 15A	EA	5
CH220	Two Pole, 20A	EA	5
CH230	Two Pole, 30A	EA	5
CH240	Two Pole, 40A	EA	5
CH250	Two Pole, 50A	EA	5
CH260	Two Pole, 60A	EA	5

Switch/Plug Combo

Use with air handlers and condensate pumps. Touch-A-Matic design, with exclusive spring loaded steel ball mechanism for smooth, positive contact movement. Small neon pilot light ON when switch is ON, is built-in to the switch on switch/receptacle.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-274W	White 2P 3W Grounding—15A 120V	EA	10

U.L. Listed. C.S.A. Approved.

Eaton Circuit Breakers - Type BR

Type BR Circuit Breakers are 1-inch per pole plug-on circuit breakers designed for Eaton's Type BR Loadcenters. They are 10 kAIC arc fault circuit interrupters rated for 120VAC or 240VAC applications.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BR115	Single Pole, 15A	EA	10
BR120	Single Pole, 20A	EA	10
BR130	Single Pole, 30A	EA	10
BR215	Two Pole, 15A	EA	5
BR220	Two Pole, 20A	EA	5
BR230	Two Pole, 30A	EA	5
BR240	Two Pole, 40A	EA	5
BR250	Two Pole, 50A	EA	5
BR260	Two Pole, 60A	EA	5
BR2100	Two Pole, 100A	EA	5

UL Certified Universal Circuit Breakers

These Type CL replacement circuit breakers are classified as direct replacements of brand specified circuit breakers by Underwriters Laboratories. These breakers are tested extensively in numerous Square D® HOME-LINE®, General Electric®, Crouse-Hinds®, Thomas & Betts®, Murray® and ITE®/Siemens® Loadcenters.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-CL115	UL Circuit Breaker 1-pole, 15A, 0.5"	EA	10
625-CL120	UL Circuit Breaker 1-pole, 20A, 0.5"	EA	10
625-CL220	UL Circuit Breaker 2-pole, 20A, 1.0"	EA	5
625-CL230	UL Circuit Breaker 2-pole, 30A, 1.0"	EA	5
625-CL240	UL Circuit Breaker 2-pole 40A, 1.0"	EA	5
625-CL250	UL Circuit Breaker 2-pole, 50A, 1.0"	EA	5

ELECTRICAL SUPPLIES cont'd

Toggle Switches

These switches are available in single pole double pole. They are UL listed and furnished with screw terminals. The ratings are A:20A 125VAC, 20 250 VAC, 1 HP at 120 240 V and B 15A 125/250 VAC, ¾ HP at 240 V.



CATALOG NO.	DESCRIPTION	RATING	UOM	ORDER MULTIPLE
TS-1	Toggle Switch – SP-ST – ON/OFF	A	EA	1
TS-3	Toggle Switch – SP-DT-CO – ON/OFF/ON	B	EA	1
TS-4	Toggle Switch – DP-ST – ON/OFF	A	EA	1

Replacement Power Supply Cord

- Extends power cords for refrigerators, microwaves, air conditioners and other appliances
- Stripped at one end and angled male plug at other end
- 3-Prong flat cord
- 125VAC



CATALOG NO.	WIRE GAUGE/CONDUCTORS	AMPS	LENGTH	UOM	ORDER MULTIPLE
89221	16/3	15	6'	EA	1
89223	14/3	15	6'	EA	50
89224	14/3	15	6'	EA	50

Dryer Cords

- Thick vinyl insulation with right angle male plug
- 4 Wire - 10/4 Round SRDT Wire
- NEMA 14-30
- 30 Amp @ 125V/250V



CATALOG NO.	WIRE GAUGE/CONDUCTORS	LENGTH	UOM	ORDER MULTIPLE
89231	10/4	4'	EA	12
89233	10/4	6'	EA	12

Right Angle Tri-Tap Portable GFCI

- For indoor or temporary outdoor use
- Provides portable protection on tools, appliances, outdoor equipment, etc.
- Great for jobsites, workshops or marinas
- 3 outlet power cord GFCI protection against hazardous shock
- 15 Amp 120 Volt
- Automatic Reset
- Class A GFCI 4-6mA Trip
- 1875 Watt
- Grounded & Open Neutral Protection
- Insulation Volts: 1500 V RMS
- NEMA 5-15P & (3) 5-15R
- 2' 12/3 AWG SSJTW Cord
- Rainproof
- Complies with NEC 305-6
- Operating Temperature: -31°F to 151°F (-35°C to 66°C)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89000	Right Angle Tri-Tap Portable GFCI	EA	24

Toggle Switch Cover

Weatherproof body for toggle switches up to 15/16" long.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-B1	Toggle Switch Cover	EA	5

Power Supply Cord (Pigtails)

Stranded bare copper conductors. Grounding conductors. PVC jacket. Right and straight angle male plug. 110 Volt. 16 AWG x 6' long. SPT 2.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-16-6	Power Supply Cord – Straight Plug	EA	50
625-16-690	Power Supply Cord – 90 Degree Plug	EA	50

Generator Power Cord Sets

- 20 Amp & 30 Amp Cord Sets are designed for use with manual transfer switches, transfer panels and power inlet boxes
- One Piece molded Cord Plugs
- L14 Twist Lock Male/Female Receptacles
- 300 Volt SJTOW Rubber Cord
- -30°F (-34°C) Outdoor Use & Oil Resistant
- L14-20P
- L14-20R
- L14-30P
- L14-30R



CATALOG NO.	AMPS	SIZE	LENGTH	NEMA#	MAX GEN INPUT	UOM	ORDER MULTIPLE
89350	30	10/4	20'	L14-30	7.5 KW	EA	6

Range Cords

- Thick vinyl insulation with right angle male plug
- 4 Wire - 6/2 & 8/2 round SRDT Wire
- NEMA 14-60
- 50A @ 125V/250V



CATALOG NO.	WIRE GAUGE/CONDUCTORS	LENGTH	UOM	ORDER MULTIPLE
89236	6/2+8/2	4'	EA	12
89238	6/2+8/2	6'	EA	12

Heavy Duty Tri-Tap Extension Cord - 3 Outlets

- Heavy Duty 2 Foot Extension Cord with Prong Plug & Lighted Block Style Receptacles
- 15A 125V 12/3 STW Cord with Molded Plug Receptacle
- Lighted Female End to detect power
- Approved under OSHA Standards for Outdoor and Indoor Use



CATALOG NO.	LENGTH	UOM	ORDER MULTIPLE
89312	2'	EA	20

ELECTRICAL SUPPLIES cont'd

In-Line Tri-Tap Portable GFCI

- For indoor or temporary outdoor use
- Provides portable protection on tools, appliances, outdoor equipment, etc.
- Great for jobsites, workshops or marinas
- 3 outlet power cord GFCI protection against hazardous shock
- 15 Amp 120 Volt
- Automatic Reset
- Class A GFCI 4-6mA Trip
- 1875 Watt
- Grounded & Open Neutral Protection
- Insulation Volts: 1500 V RMS
- NEMA 5-15P & (3) 5-15R
- 2' 12/3 AWG SSJTW Cord
- Rainproof
- Complies with NEC 305-6
- Operating Temperature: -31°F to 151°F (-35°C to 66°C)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89006	In-Line Tri-Tap Portable GFCI	EA	24

Single Portable GFCI Adapter

- GFCI Protected Plug Only
- Fits any standard 3 wire outlet
- Provides instant GFCI protection
- Immediately detects ground fault from damaged cords or exposure to water and shuts off power to avoid electrocution
- 15 Amp 120 Volt
- Automatic Reset
- Class A GFCI 4-6mA Trip
- 1875 Watt
- Grounded & Open Neutral Protection
- Insulation Volts: 1500 V RMS
- NEMA 5-15P & 5-15R
- 2' 12/3 AWG SSJTW Cord
- Rainproof
- Complies with NEC 305-6
- Operating Temperature: -31°F to 151°F (-35°C to 66°C)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89002	Single Portable GFCI Adapter	EA	24

4-Outlet GFCI Power Pack


- Automatic Reset
- Right Angle GFCI Plug with power 'ON' LED indicator
- (4) NEMA 5-15R Outlets with separate covers for each outlet
- (1) NEMA 5-15P Plug
- 15 Amp 120 Volt
- 6' 12/3 SJTW Cord
- 15A Circuit Breaker
- Automatic Reset
- Class A GFCI 4-6mA Trip
- 1875 Watt
- Grounded & Open Neutral Protection
- Insulation Volts: 1500 V RMS
- Complies with NEC 305-6
- Operating Temperature: -31°F to 151°F (-35°C to 66°C)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89008	4-Outlet GFCI Power Pack	EA	24

Right Angle GFCI Plug - Field Wired

- User Attachable
- Compatible with 15 Amp U-ground outlets and plugs
- Trip Level 4-6 mA
- Automatic Reset
- Rated for indoor and outdoor use
- Class "A" people protection and GFCI
- 15 Amp 120 Volt
- 1875 Watts, 60 Hz
- LED Power 'ON' Indicator
- Open Neutral and Ground Neutral protection
- Operating Temperature: -31°F to 151°F (-35°C to 66°C)
- Impact resistant case



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89003	Right Angle GFCI Plug - Field Wired	EA	63

5-Outlet GFCI Shock Buster

- GFCI Protected
- Plug into any 3-prong dual outlet
- Converts electrical outlet into a safety outlet
- Ideal for family TV rooms, dens, dormitory rooms, garage workshops and rec-rooms
- Protects from damaged electrical cords and hazardous electrical leakage levels
- Quick power shut off to avoid electrocution
- Built-in sensing device to detect leakage currents as low as 4mA
- 15 Amp 120 Volt



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89009	5-Outlet GFCI Shock Buster	EA	60

ELECTRICAL TAPES

7 Mil Professional Grade Electrical Tape


- 3/4" x 66' x 7 Mil
- All Weather Professional Grade Splicing Tape used as primary insulation up to 600V and as a protective outer jacket up to 69KV
- Flame retardant and weather resistant
- Excellent cold weather resistant properties -1°F to 221°F (-18°C to 105°C)
- High dielectric strength, high adhesion and shear
- Highly elastic polymeric vinyl backing - excellent elongation
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 and CSA 22.2 approved
- ASTM-D-3005 HH-I-595C
- Lead free



CATALOG NO.	COLOR	SIZE	PACKAGING TYPE	UOM	ORDER MULTIPLE
60110	Black	3/4" x 66'	Plastic Cup	EA	100

7 Mil Commercial Grade Electrical Tape

- 3/4" x 66' x 7 Mil
- Used for General Purpose Splicing as primary insulation to 600V and as a protective outer jacket at higher voltages
- Flame retardant and weather resistant
- Cold weather resistant -1°F to 221°F (-18°C to 105°C)
- Good dielectric strength, high adhesion and shear
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 and CSA 22.2 approved
- MIL-I-7798A
- Lead free



CATALOG NO.	COLOR	SIZE	PACKAGING TYPE	UOM	ORDER MULTIPLE
60100	Black	3/4" x 66'	Cello	EA	100

General Purpose Vinyl Electrical Tape

- 3/4" x 60' x 7 Mil
- Used for protective jacketing & bundling/harnessing
- Resistant to acids, alkalis, chemicals, oils, moisture, sunlight and corrosion
- Flame retardant and weather resistant
- UL 510 and CSA 22.2 approved
- Lead free
- 600V



CATALOG NO.	COLOR	PACKAGE TYPE	SLEEVE QTY	UOM	ORDER MULTIPLE
60000	Black	Cello	10	EA	100
60010	Red	Cello	10	EA	100
60020	White	Cello	10	EA	100
60030	Yellow	Cello	10	EA	100
60040	Green	Cello	10	EA	100
60050	Blue	Cello	10	EA	100
60070	Orange	Cello	10	EA	100

8.5 Mil Commercial Grade Electrical Tape

- 3/4" x 66' x 8.5 Mil
- Heavier thickness for added mechanical & electrical protection
- Used for General Purpose Splicing as primary insulation to 600V and as a protective outer jacket at higher voltages
- Flame retardant and weather resistant
- Cold weather resistant -1°F to 221°F (-18°C to 105°C)
- Good dielectric strength, high adhesion and shear
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 and CSA 22.2 approved
- MIL-I-7798A
- Lead free



CATALOG NO.	COLOR	SIZE	PACKAGING TYPE	UOM	ORDER MULTIPLE
60200	Black	3/4" x 66'	Cello	EA	100
60202	Black	2" x 66'	Cello	EA	40

Scotch 3M Super 33+ Electrical Tape

Premium grade, 7 mil thick, all-weather vinyl insulating tape. Performs continuously in a temperature ambient of up to 220°F and as low as 0°F. Resealable plastic case. Made in USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET33	Super 33+ Electrical Tape – 3/4" x 66'	EA	10

Scotch 3M Super 88 Electrical Tape

Premium grade, 8.5 mil thick, all-weather vinyl insulating tape. Performs continuously in a temperature ambient of up to 220°F and as low as 0°F. Excellent resistance to abrasion, moisture, acids and corrosion. Packaged in a resealable plastic case. Made in the USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET44	Super 88 Electrical Tape – 3/4" x 66'	EA	10

Scotch 35 Vinyl Electrical Tape

This 7 mil premium grade electrical vinyl tape stretches to conform to virtually any shape that requires color-coded insulation. Abrasion and weather resistant. Measures 3/4" x 66'.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET35N	Vinyl Electrical Tape – Orange	EA	10
ET35G	Vinyl Electrical Tape – Green	EA	10
ET35R	Vinyl Electrical Tape – Red	EA	10
ET35W	Vinyl Electrical Tape – White	EA	10

ELECTRICAL TAPES cont'd

Economy Electrical Tape

This tape is suitable for use up to 175 F (80C) and not more than 600V. The electrical tape is excellent for adhesion and UL listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-3460	3/4" x 60' Economy Electrical Tape	EA	10

Glass Cloth, Moisture Sealing, and Economy Electrical Tapes

This is a woven glass cloth tape designed to operate in 600 volt dry applications, requiring high mechanical strength and resistance to high temperatures. The glass cloth is specially treated and prepared to provide corrosion free protection. It will not shrink, rot, or burn and has a high tensile strength. It contains pressure sensitive thermosetting adhesive which performs as Class B temperature (266 degrees F / 130 degrees C). Provides hear stable insulation for hot spot applications Highlight: Color White. Width 1/2in. Length 66 ft. Thickness 7 mil. Tensile Strength (2) 150 lb./in. Material Glass Cloth.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GC275	1/2" x 66' Glass Cloth Electrical Tape by 3M	EA	10
GC277	3/4" x 66' Glass Cloth Electrical Tape by 3M	EA	10
ET130C1	1" x 30' Moisture Sealing Splicing Tape by 3M	EA	24
ET22	3/4" x 66' Hiawatha Electrical Tape by 3M	EA	10
AT-1700	3/4" x 66' TemFlex™ by 3M	EA	10

TERMINALS, CONNECTORS

Compressor Repair Kit

Finally, a product that simplifies the repair of burned or damaged spade terminals when reconnecting or replacing a compressor. Fits both non burned and burned terminals. Connects to the compressor via precision brass cylinders that fit over the terminals and connect with stainless steel set screws. Wires are permanently attached. Standard factory 600V, 65 strand machine wire. Easy to install and guaranteed for the life of the compressor.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TLC-3-8	3 Wire, 8 Gauge Connection Kit	EA	1
TLC-3-10	3 Wire, 10 Gauge Connection Kit	EA	1
TLC-3-12	3 Wire, 12 Gauge Connection Kit	EA	1

Transparent Plastic Boxes with Terminal Assortments

Boxes are made of soft, pliable, durable K resin with 18 compartments containing the most popular terminals, including hi temp and compressor terminals.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PA10	180 Terminals (10 Each Kind)	EA	1
PA25	360 Terminals (20 Each Kind)	EA	1
PA25AP	Appliance Parts Technician Assortment (mostly Hi-Temp)	EA	1
PA18	"K" Resin Plastic Box Only	EA	1

Replacement Compressor Leads

Extreme heat within compressors typically causes failure of wiring insulation. This can cause corrosion to the inner strands of copper within the wire used for compressor hook up. This reduces the power flow to the compressor causing the unit to overheat and can prevent the compressor from starting. A MINIMUM of 12in. of wire must be removed. The DiversiTech Replacement Compressor Leads are ideal for replacing this corroded wiring. 24in. leads also available for replacing wire all the way to the contactor and capacitor.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CC33	Compressor Leads – 12" with Butt, pack of 3	PK	1
CC33-18	Compressor Leads – 18" with Butt, pack of 3	PK	1
CC33-24	Compressor Leads – 24" with Ring, pack of 3	PK	1

Compartmented Storage Boxes

These boxes can be used to store your compressor terminals, nylon ties and clamps.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MB21	21 Compartmented Metal Box	EA	1
MB22	21 Compartmented Metal Box w/230 popular EA items including hi-temp and compressor terminals, nylon ties and clamps	EA	1

TERMINALS, CONNECTORS cont'd

**Grommets – Vinyl
(By Panel Hole Size)**

Grommets safely route cables and wires through sharp edged cutouts.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GV06*	Grommets – 3/8", pack of 18	PK	1
GV07	Grommets – 7/16", pack of 12	PK	1
GV08*	Grommets – 1/2", pack of 12	PK	1
GV10*	Grommets – 5/8", pack of 7	PK	1
GV12	Grommets – 3/4", pack of 3	PK	1
GV14*	Grommets – 7/8", pack of 4	PK	1
GVA1	Assortment – Small – GV04, GV05, GV06, GV07, GV08, pack of 15	PK	1
GVA2	Assortment – Large – GV08, GV10, GV12, GV14, GV16, pack of 5	PK	1

Sizes shown above also available in 100 packs. Replace "" with "C" for part number.

**Heat Shrink Tubing –
Polyolefin 50% Shrink, Black
Commercial Grade**

Our shrinking tube is economical and mechanically tough heat shrinkable tubing used for insulating, jacketing and identification.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HS03	3/16" I.D. Expanded – 4" Long, pack of 8	PK	1*
HS04	1/4" I.D. Expanded – 4" Long, pack of 7	PK	1*
HS06	3/8" I.D. Expanded – 4" Long, pack of 6	PK	1*
HS08	1/2" I.D. Expanded – 4" Long, pack of 5	PK	1*
HSA1	Assorted 3/16", 1/4", 3/8" – 4" Long, pack of 7	PK	1
HSA2	Assorted 1/2", 3/4", 1" – 4" Long, pack of 4	PK	1

Available in lengths up to 250 ft.

*These items are also available in bulk. To order, enter the catalog number followed by the letter "B". For example, HS03B is the bulk part number for HS03. Bulk items are priced and shipped by the foot.

200 Piece Terminal Kit

- High impact re-usable plastic box
- Assortment of ring & spade terminals, butt connectors, male & female disconnects

TERMINALS IN KIT

DESCRIPTION	QTY
Ring Terminal 22-16 #6	4
Ring Terminal 22-16 #8	4
Ring Terminal 22-16 #10	4
Ring Terminal 16-14 #6	4
Ring Terminal 16-14 #8	4
Ring Terminal 16-14 #10	5
Ring Terminal 12-10 #8	4
Ring Terminal 12-10 #10	6
Ring Terminal 12-10 1/4"	5
Ring Terminal 12-10 5/16"	4
Spade Terminal 22-16 #6	11
Spade Terminal 22-16 #8	13
Spade Terminal 22-16 #10	4
Spade Terminal 16-14 #6	5
Spade Terminal 16-14 #8	4
Spade Terminal 16-14 #10	4
Spade Terminal 12-10 #8	4
Spade Terminal 12-10 #10	16
Spade Terminal 12-10 1/4"	4
Butt connector 22-18	11
Butt connector 16-14	11
Butt connector 12-10	9
Vinyl Male Disconnect 22-16 .250	4
Vinyl Male Disconnect 22-14 .250	4
Vinyl Male Disconnect 22-10 .250	4
Vinyl Female Disconnect 22-18 .250	5
Vinyl Female Disconnect 16-14 .187	4
Vinyl Female Disconnect 16-14 .250	11
Vinyl Female Disconnect 12-10 .250	13
Nyl Full Ins Fem Discon 22-18	4
Nyl Full Ins Fem Discon 16-14	5
Nyl Full Ins Fem Discon 12-10 .250	4
Nyl Full Ins Male Discon 22-18 .250	4
Nyl Full Ins Male Discon 16-14 .250	4



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
10816	200 Piece Terminal Kit	EA	5

THERMAL CONTROLS

Fusible Links

Fusible Links are temperature sensitive, one time devices. Engineered as safety links, they open the circuit if the designed limit temperature is reached.

CATALOG NO.	FUSIBLE TEMP °F	TYPE	PRONG TYPE	QTY/PACK	UOM	ORDER MULTIPLE
HFL-4257	257°	In-Line		pack of 4	PK	1
HFL-4300	300°	In-Line		pack of 4	PK	1
HFL-4333	333°	In-Line		pack of 4	PK	1
HFL-5257	257°	Face Plate	Straight	pack of 2	PK	1
HFL-5258	257°	Face Plate	Right Angle	pack of 2	PK	1
HFL-5300	300°	Face Plate	Straight	pack of 2	PK	1
HFL-5301	300°	Face Plate	Right Angle	pack of 2	PK	1
HFL-5333	333°	Face Plate	Straight	pack of 2	PK	1



Replacement Element Kits

Field repair damaged element sections of electric heaters. Each kit contains a specific KW replacement element, two ceramic terminal insulator sets, plated bolts, nuts and washers.


CATALOG NO.	WATTAGE AT		IN PLACE LENGTH (INCHES)		UOM	ORDER MULTIPLE
	240V	208V	MINIMUM	MAXIMUM		
HEK-500	5000	3750	54"	162"	EA	1



Sequencers

The sequencers are used in electric heat systems to stage blower motors and heating elements. All sequencers are for 24V control.

CATALOG NO.	NO. CIRCUITS	KILWON NO.	SWITCH CONFIGURATION	DELAY ON TIME MIN.-MAX. SECONDS	DELAY OFF TIME MIN.-MAX. SECONDS	UOM	ORDER MULTIPLE
HDR-101	1 Main	60000A0211	SPST-NO	1-24	45-75	EA	1
HDR-102	1 Main	60000A0147	SPST-NO	30-75	1-40	EA	1
HDR-201	2 Main	60000E0110	DPST-NO	1-24	45-75	EA	1
HDR-202	2 Main	60000E0109	DPST-NO	30-70	1-40	EA	1
HDR-211	2 Main Staged	60200A0117	DPST-NO	30-110	1-40	EA	1
HDR-212	2 Main Staged	60200A0127	DPST-NO	1-25	50-110	EA	1
HDR-221	3 Main Staged	51172-131-1	DPST-NO SPST-NO	1-25	50-110	EA	1
HDR-222	4 Main Staged	51172-131-2	2 DPST-NO	1-40	50-110	EA	1



Manual Reset Fire Stat

This bi metal switch is used as a manual reset. When temperature condition is met, the device opens. The manual reset can only be reset after proper cool down of the switch. The HMR 130 is a popular fire stat in ducted air distribution systems. Should temperatures in the duct exceed 130 degree F, the switch opens, shutting down the whole system so no fire or smoke can be spread by the fan.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HMR-130	Bi-metal Manual Reset Fire Stat	EA	1



THERMOSTATS

LuxPro Thermostats

LuxPro thermostats are designed to be a reliable, simple solution to in home comfort, so that everyone can enjoy the benefits and comforts of advanced temperature control. Diversitech offers a variety of LuxPro models and options to match any installation need.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
675-P521U	5-2 program, 2 H/1 C, Programmable	EA	1
675-P621U	5-1-1 program, 2 H/1 C, Programmable	EA	1
675-P721UT	7 Day, 2 H/1 C, Programmable, Touchscreen	EA	1
675-P722U	7 Day, Programmable, 2 H/2 C for Conventional, 2 H/1 C for Heat Pumps	EA	1
675-PSD010BF	Digital for Heat Only, with Fan Switch	EA	1
675-PSD111	1 H/1 C, Non-Programmable, Vertical/Horizontal	EA	1
675-PSDH121	1 or 2 H/C, Non-Programmable, Vertical/Horizontal	EA	1
675-PSM30SA	Heat Only Mechanical	EA	1
675-PSM40SA	Heating & Cool Mechanical	EA	1



THERMOSTAT GUARDS

Plastic Thermostat Guards

Use to prevent tampering with thermostats. The covers are clear, allowing complete viewing of the thermostat and current settings. Furnished complete with ring and/or solid base. Includes vent holes for easy airflow across the thermostat. Lockable with universal key. Internal dimensional clearance/sizing for thermostats as noted.



CATALOG NO.	DESCRIPTION	T-STAT CLEARANCE	UOM	ORDER MULTIPLE
585-TG	Clear Plastic w/Two Bases	8-1/4" x 4-1/2" x 3-1/4"	EA	1
585-TG1	Clear Plastic w/Two Bases	5-3/4" x 3-1/2" x 2-3/4"	EA	1
585-TG2	Clear Plastic w/Two Bases	4-3/4" x 4-1/4" x 2-3/4"	EA	1
585-TG5	Clear Plastic w/Solid Base	3-1/2" x 3-1/4" x 2-1/4"	EA	1
585-TG6	Clear Plastic w/Two Bases	6-1/4" x 3-3/4" x 1-3/4"	EA	1
585-F336	Key for Thermostat Guard		EA	1

Cross Reference

DIVERSITECH PART NO.	BEKO PART NO.	BRAMEC PART NO.	MARS PART NO.
585-TG	BTG-UK2	13012	70220
585-TG1	BTG-RK	13016	70210
585-TG2	BTG-K	13008	70205
585-TG5	BTG-EK	13004	70201
585-TG6	BTG-DK	13018	70217
585-TG8	BTG-54VLW	13001	70216

Steel Thermostat Guards

Steel thermostat guards are used to prevent tampering with thermostats. The covers are steel, giving complete tamper protection of the thermostat, and physical impact protection. Great for warehouse and industrial locations. Furnished complete with ring and/or solid base as noted. Includes vent holes for easy airflow across the thermostat. Lockable with universal key. Internal dimensional clearance/sizing for thermostats as noted.



CATALOG NO.	DESCRIPTION	T-STAT CLEARANCE	UOM	ORDER MULTIPLE
585-TG3	Beige Steel w/Solid Base	6" x 4" x 3"	EA	1
585-TG4	Beige Steel w/Ring Base	6" x 4" x 3"	EA	1
585-TG7	Beige Steel w/Solid Base	5-1/2" x 3-1/2" x 2-3/4"	EA	1
585-TG8	Beige Steel w/Ring Base	5" x 3" x 2-3/4"	EA	1
585-TG9	Beige Steel w/Two Bases	6" x 4" x 3"	EA	1

THERMOSTAT WIRE

Thermostat Wire

Class 2 thermostat wire for indoor wiring needs. Soft drawn bare copper wire, semi rigid PVC insulation and PVC overall jacket. Packaged on aluminum spool.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-18-2	18 AWG, 2 Conductors – 500 ft. Spool	EA	4
620-18-3	18 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-18-4	18 AWG, 4 Conductors – 250 ft. Spool	EA	4
620-18-5	18 AWG, 5 Conductors – 250 ft. Spool	EA	4
620-18-6	18 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-18-7	18 AWG, 7 Conductors – 250 ft. Spool	EA	4
620-18-8	18 AWG, 8 Conductors – 250 ft. Spool	EA	4
620-18-10	18 AWG, 10 Conductors – 250 ft. Spool	EA	4
620-20-3	20 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-20-4	20 AWG, 4 Conductors – 250 ft. Spool	EA	4
620-20-5	20 AWG, 5 Conductors – 250 ft. Spool	EA	4
620-20-6	20 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-20-7	20 AWG, 7 Conductors – 250 ft. Spool	EA	4
620-20-8	20 AWG, 8 Conductors – 250 ft. Spool	EA	4
620-20-10	20 AWG, 10 Conductors – 250 ft. Spool	EA	4

U.L. Listed. Meets Subject 13 per Article 725, 1990 NEC.

Plenum Thermostat Wire

The Plenum Thermostat Wire is UL Listed type CL2P NEC Article 725 and is designed for use in thermostat control applications.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-18-2P	18 AWG, 2 Conductors – 500 ft. Spool	EA	4
620-18-3P	18 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-18-6P	18 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-18-8P	18 AWG, 8 Conductors – 250 ft. Spool	EA	4

Wire for Mini-Split Installation

Wire and cabling specific for mini split installation power supply and control circuits.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-18-4	Stranded Shielded CL3R, 50' per roll	EA	1
230-14-4	Stranded Non-Shielded CL3R, 50' per roll	EA	1
230-14-7	Stranded Non-Shielded CL3R, 50' per roll	EA	1
230-14-4S	Stranded Shielded CL3R, 50' per roll	EA	1

THERMOSTAT WIRE cont'd

HVAC Mini-Split Wiring Solutions

Southwire® is a market leader with its EZ-In™ Mini-Split cable designed specifically for mini-split installations. EZ-In™ Mini-Split cable, available in both shielded and non-shielded configurations, has brought ease of installation and savings to HVAC mini-split installations by eliminating the use of conduit or cable trays. Now, Southwire® has enhanced its offering with connectors and tools specifically designed with mini-split installations in mind.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
59351202	EZ-IN Shielded Mini-Split Cable, 14-4 Stranded, 600V, 250FT Reel	EA	1
59351203	EZ-IN Shielded Mini-Split Cable, 14-4 Stranded, 600V, 50FT Bag	EA	1
64235201	EZ-IN Shielded Mini-Split Cable Liquid Tight Straight Connector, 1/2" Hub Size	EA	25
64275801	EZ-IN Shielded Mini-Split Cable Liquid Tight 90 Degree Connector, 1/2" Hub Size	EA	15
58278040	Wire Strippers and Cutters, Heavy Duty, Stainless Steel, for 18-10AWG Wires	EA	5
58282040	Compact Conduit and Metal Scorer, Jacket Cutter	EA	3
58282240	Rotary Armor Cable Cutter with Rotary Blade	EA	2
58282340	Replacement Rotary Cutter Blades	EA	5
64846401	Point of Purchase Display with Liquid Tight Straight and 90 Degree Connectors, Cutter, Replacement Blades	EA	1



STRANDED COPPER THHN WIRE

Stranded Copper Wire in Clear Dispenser Pack, 194°F

This copper wire is UL listed and THHN wire. It is 19 strand copper and is 600 V as well as 90°C Stranded.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
W801	08 Gauge, 10 ft., Black	EA	1
W802	08 Gauge, 10 ft., Red	EA	1
W803	08 Gauge, 10 ft., Green	EA	1
W805	08 Gauge, 10 ft., White	EA	1
W101	10 Gauge, 10 ft., Black	EA	1
W102	10 Gauge, 10 ft., Red	EA	1
W103	10 Gauge, 10 ft., Green	EA	1
W104	10 Gauge, 10 ft., Blue	EA	1
W105	10 Gauge, 10 ft., White	EA	1
W121	12 Gauge, 15 ft., Black	EA	1
W122	12 Gauge, 15 ft., Red	EA	1
W123	12 Gauge, 15 ft., Green	EA	1
W124	12 Gauge, 15 ft., Blue	EA	1
W125	12 Gauge, 15 ft., White	EA	1
W141	14 Gauge, 20 ft., Black	EA	1
W142	14 Gauge, 20 ft., Red	EA	1
W143	14 Gauge, 20 ft., Green	EA	1
W144	14 Gauge, 20 ft., Blue	EA	1
W145	14 Gauge, 20 ft., White	EA	1

Stranded Copper Wire on Spool

This copper wire is UL listed and THHN wire. It is 19 strand copper and is 600 V as well as 90°C Stranded. This comes 100 ft. per spool.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
W801-100	08 Gauge, 100 ft. Spool, Black	EA	1
W802-100	08 Gauge, 100 ft. Spool, Red	EA	1
W803-100	08 Gauge, 100 ft. Spool, Green	EA	1
W804-100	08 Gauge, 100 ft. Spool, Blue	EA	1
W805-100	08 Gauge, 100 ft. Spool, White	EA	1
W101-100	10 Gauge, 100 ft. Spool, Black	EA	1
W102-100	10 Gauge, 100 ft. Spool, Red	EA	1
W103-100	10 Gauge, 100 ft. Spool, Green	EA	1
W104-100	10 Gauge, 100 ft. Spool, Blue	EA	1
W105-100	10 Gauge, 100 ft. Spool, White	EA	1
W121-100	12 Gauge, 100 ft. Spool, Black	EA	1
W122-100	12 Gauge, 100 ft. Spool, Red	EA	1
W123-100	12 Gauge, 100 ft. Spool, Green	EA	1
W124-100	12 Gauge, 100 ft. Spool, Blue	EA	1
W125-100	12 Gauge, 100 ft. Spool, White	EA	1
W141-100	14 Gauge, 100 ft. Spool, Black	EA	1
W142-100	14 Gauge, 100 ft. Spool, Red	EA	1
W143-100	14 Gauge, 100 ft. Spool, Green	EA	1
W144-100	14 Gauge, 100 ft. Spool, Blue	EA	1
W145-100	14 Gauge, 100 ft. Spool, White	EA	1

STRANDED COPPER THHN WIRE cont'd

Stranded Copper Wire on Spool

This copper wire is UL listed and THHN wire. It is 19 strand copper and is 600 V as well as 90°C Stranded. This comes 50 ft. per spool.



High Temperature Wire, 400°F (204°C), 600 V.

7 strand tin coated copper wire with silicone rubber insulation protected by a braided fiberglass jacket. Use on the front of all gas furnaces with spark ignition because of flame roll out on start up. Also on all power feeds to electric strip and duct heaters. Also used on all heat producing food preparation equipment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
W801-50	08 Gauge, 50 ft. Spool, Black	EA	1
W802-50	08 Gauge, 50 ft. Spool, Red	EA	1
W803-50	08 Gauge, 50 ft. Spool, Green	EA	1
W804-50	08 Gauge, 50 ft. Spool, Blue	EA	1
W101-50	10 Gauge, 50 ft. Spool, Black	EA	1
W102-50	10 Gauge, 50 ft. Spool, Red	EA	1
W103-50	10 Gauge, 50 ft. Spool, Green	EA	1
W104-50	10 Gauge, 50 ft. Spool, Blue	EA	1
W105-50	10 Gauge, 50 ft. Spool, White	EA	1
W121-50	12 Gauge, 50 ft. Spool, Black	EA	1
W122-50	12 Gauge, 50 ft. Spool, Red	EA	1
W123-50	12 Gauge, 50 ft. Spool, Green	EA	1
W124-50	12 Gauge, 50 ft. Spool, Blue	EA	1
W125-50	12 Gauge, 50 ft. Spool, White	EA	1
W141-50	14 Gauge, 50 ft. Spool, Black	EA	1
W142-50	14 Gauge, 50 ft. Spool, Red	EA	1
W143-50	14 Gauge, 50 ft. Spool, Green	EA	1
W144-50	14 Gauge, 50 ft. Spool, Blue	EA	1
W145-50	14 Gauge, 50 ft. Spool, White	EA	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WHT20	14 gauge, 10 ft. black, 10 ft. white	EA	1
WHTB14-50	14 gauge, black, 50 ft.	EA	1
WHTR14-50	14 gauge, red, 50 ft.	EA	1
WHTW14-50	14 gauge, white, 50 ft.	EA	1
WHTB12-50	12 gauge, black, 50 ft.	EA	1
WHTB10-50	10 gauge, black, 50 ft.	EA	1

WIRE CONNECTORS

Wire Connectors—Screw On, U.L. Listed, C.S.A Approved

Color coded connectors make quick, secure connections for positive continuity. High dielectric thermoplastic shell resists chemical action from hydrocarbons, dilute acid or alkaline solutions. Deep skirt design prevents exposure of bare wire.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-001	Gray Screw-On – Size 71B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-002	Blue Screw-On – Size 72B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-003	Orange Screw-On – Size 73B, #22 to #14 AWG, 600V Max., pack of 100	PK	1
623-004	Yellow Screw-On – Size 74B, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-005	Red Screw-On – Size 76B, #18 to #10 AWG, 600V Max., pack of 100	PK	1

U.L. Listed. CSA Approved.

Wire Connectors—Winged, U.L. Listed, C.S.A Approved

Wings give surer grip; offset center design provides great twisting leverage. Expandable square-wire spring instantly adjusts to shape and size to create a strong, vibration-resistant connection. Same tough shell as screw-on type.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-000	Lg. Gray Winged – Size 78B, #14 to #8 AWG, 600V Max., pack of 50	PK	1
623-006	Yellow Winged – Size 84, #22 to #10 AWG, 600V Max., pack of 100	PK	1
623-007	Red Winged – Size 86, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-008	Blue Winged – Size 89, #10 to #6, 600V Max., pack of 50	PK	1

U.L. Listed. C.S.A. Approved.

WIRE CONNECTORS cont'd

Twist-On Wire Connectors Combo Kit

The 623-MIX Twist-On Wire Connectors Combo Kit is a very handy and convenient wire connector kit. It contains 600 pieces of color-coded, twist-on and winged twist-on wire connectors in 9 commonly used sizes. Its durable and configurable Plano box is great organizer for wire connector refills and storage. A wiring combinations chart for each connector is also included. It is a great truck stock item for contractors.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-MIX	Twist-On Wire Connectors Combo Kit, Pack of 600	PK	1

U.L. Listed. CSA Approved.

Wire Connectors—Contractor Packs, U.L. Listed, C.S.A Approved

These connectors have a high dielectric thermoplastic shell. These are UL listed and CSA approved. This product is great for making quick and secure connections.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
C222	Closed End Connectors 22-14 W, pack of 18	PK	1
C222C	Closed End Connectors 22-14 W, pack of 100	PK	1
C223	Closed End Connectors 18-10 W, pack of 15	PK	1
C223C	Closed End Connectors 18-10 W, pack of 100	PK	1
C241	Blue Wire Connectors 22-16 W, pack of 20	PK	1
C241L	Blue Wire Connectors 22-16 W, pack of 50	PK	1
C243	Orange Wire Connectors 22-14 W, pack of 15	PK	1
C243L	Orange Wire Connectors 22-14 W, pack of 50	PK	1
C245	Yellow Wire Connectors 18-10 W, pack of 13	PK	1
C245L	Yellow Wire Connectors 18-10 W, pack of 50	PK	1
C247	Red Wire Connectors 18-10 W, pack of 10	PK	1
C312	Yellow Winged Wire Connectors, pack of 13	PK	1
C312L	Yellow Winged Wire Connectors, pack of 50	PK	1
C512	Red Winged Wire Connectors, pack of 10	PK	1
C512L	Red Winged Wire Connectors, pack of 50	PK	1

U.L. Listed. CSA Approved.

Wire Connectors—Screw On, U.L. Listed, C.S.A Approved

Color coded connectors make quick, secure connections for positive continuity. High dielectric thermoplastic shell resists chemical action from hydrocarbons, dilute acid or alkaline solutions. Deep skirt design prevents exposure of bare wire. New handy carry handle and grip bottle. U.L. Listed. C.S.A. Approved.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-012	Blue Screw-On – Size 72B, #22 to #16 AWG, 300V Max., pack of 600	PK	1
623-013	Orange Screw-On – Size 73B, #22 to #14 AWG, 600V Max., pack of 300	PK	1
623-014	Yellow Screw-On – Size 74B, #18 to #10 AWG, 600V Max., pack of 200	PK	1

U.L. Listed. CSA Approved.

Porcelain Wire Connectors

Porcelain Wire Connectors are used in high temperature applications such as appliances.



CATALOG NO.	DESCRIPTION	AWG	UOM	ORDER MULTIPLE
CPN1	Porcelain – Small, pack of 15	22-16, 2 Strand Wire	PK	1
CPN1C	Porcelain – Small, pack of 100	22-16, 2 Strand Wire	PK	1
CPN2	Porcelain – Medium, pack of 10	18-14, 2 Strand Wire	PK	1
CPN2C	Porcelain – Medium, pack of 100	18-14, 2 Strand Wire	PK	1
CPN3	Porcelain – Large, pack of 10	18-14, 3 Strand Wire	PK	1
CPN3C	Porcelain – Large, pack of 100	18-14, 3 Strand Wire	PK	1
CPN2M	Porcelain – Medium, pack of 1000	18-14, 2 Strand Wire	PK	1

WIRE/CABLE TIES, MOUNTS, CLAMPS

Cable Tie Assortment Pack

6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct. Tensioning tool for 32"+ allows operator to adjust strap to any desired tension.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-711	Natural Cable Tie Assortment – 7" and 11", pack of 150	PK	25
7-711-B	Black Cable Tie Assortment – 7" and 11", pack of 150	PK	25
7-5811	Natural Cable Tie Assortment – 5", 8", and 11", pack of 450	PK	30
7-5811-B	Black Cable Tie Assortment – 5", 8", and 11", pack of 450	PK	30

Heavy Duty Cable Ties

6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct. Tensioning tool for 32"+ allows operator to adjust strap to any desired tension.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-P24	24" Long – Fits up to 6" Duct – 175 lb. Tensile	EA	50
7-P36	36" Long – Fits up to 10" Duct – 175 lb. Tensile	EA	50
7-P36B	36" Long – Black – Fits up to 10" Duct – 175 lb. Tensile	EA	50
7-P48	48" Long – Fits up to 14" Duct – 175 lb. Tensile	EA	50
7-P48B	48" Long – Black – Fits up to 14" Duct – 175 lb. Tensile	EA	25
7-L300	Tensioning Tool for 120-175 lb. Ties	EA	1

WIRE/CABLE TIES, MOUNTS, CLAMPS cont'd

White Nylon Ties with Mounting Hole

These wire ties are perfect for securing wires. You can choose from an assortment of sizes.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WTM05	White Wire Ties with Mounting Hole – 5" Nylon, pack of 13	18	PK	1
WTM05C	White Wire Ties with Mounting Hole – 5" Nylon, pack of 100	18	PK	1
WTM07	White Wire Ties with Mounting Hole – 7" Nylon, pack of 11	50	PK	1
WTM07C	White Wire Ties with Mounting Hole – 7" Nylon, pack of 100	50	PK	1
WTM11	White Wire Ties with Mounting Hole – 11" Nylon, pack of 6	50	PK	1
WTM11C	White Wire Ties with Mounting Hole – 11" Nylon, pack of 100	50	PK	1
WTM14C	White Wire Ties with Mounting Hole – 14" Nylon, pack of 100	50	PK	1

Black Nylon Ties with Mounting Hole

These wire ties are perfect for securing wires. You can choose from an assortment of sizes.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WTMB05C	Black Wire Ties with Mounting Hole – 5" Nylon, pack of 100	18	PK	1
WTMB07	Black Wire Ties with Mounting Hole – 7" Nylon, pack of 10	50	PK	1
WTMB07C	Black Wire Ties with Mounting Hole – 7" Nylon, pack of 100	50	PK	1
WTMB11	Black Wire Ties with Mounting Hole – 11" Nylon, pack of 6	50	PK	1
WTMB11C	Black Wire Ties with Mounting Hole – 11" Nylon, pack of 100	50	PK	1
WTMB14C	Black Wire Ties with Mounting Hole – 14" Nylon, pack of 100	50	PK	1

Wire and Cable Clamps – Nylon

These wire ties are perfect for securing wires. You can choose from an assortment of diameter sizes.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WC02	Wire and Cable Clamps – 1/8" Diameter, pack of 40	PK	1
WC03	Wire and Cable Clamps – 3/16" Diameter, pack of 40	PK	1
WC04	Wire and Cable Clamps – 1/4" Diameter, pack of 35	PK	1
WC05	Wire and Cable Clamps – 5/16" Diameter, pack of 35	PK	1
WC06	Wire and Cable Clamps – 3/8" Diameter, pack of 30	PK	1
WC08	Wire and Cable Clamps – 1/2" Diameter, pack of 25	PK	1
WC09	Wire and Cable Clamps – 9/16" Diameter, pack of 20	PK	1
WC10	Wire and Cable Clamps – 5/8" Diameter, pack of 20	PK	1
WC12	Wire and Cable Clamps – 3/4" Diameter, pack of 15	PK	1
WC14	Wire and Cable Clamps – 7/8" Diameter, pack of 15	PK	1
WC16	Wire and Cable Clamps – 1" Diameter, pack of 14	PK	1
WCA1	Wire and Cable Clamps Assortment – 1/8" to 1", pack of 26	PK	1

All above sizes are available in 100 packs. Add "C" to the end of the part number.

White Nylon Wire Ties


These wire ties are perfect for securing wires. You can choose from an assortment of sizes.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WT04	White Wire Ties – 4" Nylon, pack of 40	18	PK	1
WT04C	White Wire Ties – 4" Nylon, pack of 100	18	PK	1
WT05	White Wire Ties – 5" Nylon, pack of 35	18	PK	1
WT05C	White Wire Ties – 5" Nylon, pack of 100	18	PK	1
WT07	White Wire Ties – 7" Nylon, pack of 30	50	PK	1
WT07C	White Wire Ties – 7" Nylon, pack of 100	50	PK	1
WT11	White Wire Ties – 11" Nylon, pack of 15	50	PK	1
WT11C	White Wire Ties – 11" Nylon, pack of 100	50	PK	1
WT11L	White Wire Ties – 11" Nylon, pack of 50	50	PK	1
WT15	White Wire Ties – 15" Nylon, pack of 12	50	PK	1
WT15C	White Wire Ties – 15" Nylon, pack of 100	50	PK	1
WTA1	White Wire Ties – Assorted 4", 7", and 11" Nylon, pack of 30		PK	1

Black Nylon Wire Ties

These wire ties are perfect for securing wires. You can choose from an assortment of sizes. Ultraviolet resistant for outdoor use.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WTB05	Black Wire Ties – 6" Nylon, pack of 35	18	PK	1
WTB05C	Black Wire Ties – 6" Nylon, pack of 100	18	PK	1
WTB07	Black Wire Ties – 7" Nylon, pack of 30	50	PK	1
WTB07C	Black Wire Ties – 7" Nylon, pack of 100	50	PK	1
WTB07M	Black Wire Ties – 7" Nylon, pack of 1000	50	PK	1
WTB11	Black Wire Ties – 11" Nylon, pack of 15	50	PK	1
WTB11C	Black Wire Ties – 11" Nylon, pack of 100	50	PK	1
WTB11CR	Black Wire Ties, Releasable – 11" Nylon, pack of 100	50	PK	25
WTB11D	Black Wire Ties – 11" Nylon, pack of 500	50	PK	1
WTB11M	Black Wire Ties – 11" Nylon, pack of 1000	50	PK	1
WTB15	Black Wire Ties – 14" Nylon, pack of 12	50	PK	1
WTB15C	Black Wire Ties – 15" Nylon, pack of 100	50	PK	1
WTBA1	Black Wire Ties – Assorted 4", 7", and 11" Nylon, pack of 28	50	PK	1

Wire Tie Mounts

These mounts are use for mounting wires in electrical work.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WTM1	White Wire Tie Mounts – Adhesive Back, pack of 4	PK	1
WTM1C	White Wire Tie Mounts – Adhesive Back, pack of 100	PK	1
WTM2	White Wire Tie Mounts – #8 Screw, pack of 7	PK	1
WTM2C	White Wire Tie Mounts – #8 Screw, pack of 100	PK	1

TOOLS



TUBE WORKING

Flaring Tools	98-99
Swaging Tools	100
Tube Bending	101
Tube Cutting	102-103
Accessories	103

MANIFOLD GAUGES AND HOSES

Manifolds	104-105
Manifold Gauges	106-107
Hoses	107
Ball Valve Hoses	108
Hose Adapters	108
Valve Core Removal	109

SERVICE TOOLS

General Tools	109-112
Brushes	112-113
Compressor Tote	114
Fin Tools	114
Inspection Mirrors	114
Purge Tools	114
Reamers	115
Thermometers	116

GASSES AND TORCHES

Gasses	116
Torches	117
Replacement - Recovery Cylinders	117

SHEET METAL TOOLS

Snips	118-119
Bending and Braking	119-120
Crimping	120

TOOLS STORAGE AND CASES

Storage Containers	121-124
--------------------	---------

CONDENSOR AND COIL CLEANING TOOLS

Sprayers	125-127
Mini-Split Bibs	127-128
Sprayer Accessories	128-130

HAND TOOLS

Hex Keys	130-131
Multitools	131-132
Nut Drivers	132-135
Screwdrivers	135-136
Utility Knives	137
Wrenches and Pliers	137-141

DRAIN LINE CLEANING AND CLEARING

Drain Gun and Cartridges	141
Refillable, Portable, and Other Drain Line Clearing	142
Accessories	142

SERVICE EQUIPMENT

Lineset Cleaner	143
Vacuum Gauges	143-144
Refrigerant Scales	144
Leak Detection	145
Vacuum Pumps	146
Recovery Machines	146

WORK LIGHTING

Work Lights	147-148
-------------	---------

TOOLS | TUBE WORKING

FLARING TOOLS

SPIN® Tools

SPIN® Flaring and Swaging bits deliver the best flares and swages in seconds! Gives you consistent sizes on flares and swages, every time. Using an innovative technology, SPIN® tools are designed to quickly flare or swage virtually any copper or aluminum tube. Perfect for mini-splits and ductless A/C copper and aluminum tubes, it keeps the tubing thickness for high pressure refrigerant fluids such as R410A, R22, etc. Available in sets from 4 up to 6 pieces for HVAC/R applications; and 3 pieces for plumbing applications.



FLARING

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
F4000	4 pc Flaring Set - 1/4", 3/8", 1/2", 5/8"	PK	1
F5000	5 pc Flaring Set - 1/4", 3/8", 1/2", 5/8", 3/4"	PK	1
F6000	6 pc Flaring Set - 1/4", 3/8", 1/2", 5/8", 3/4", 7/8"	PK	1
F1014	Flaring Tool, 1/4", Individual	EA	1
F1516	Flaring Tool, 5/16", Individual	EA	1
F1038	Flaring Tool, 3/8", Individual	EA	1
F1012	Flaring Tool, 1/2", Individual	EA	1
F1058	Flaring Tool, 5/8", Individual	EA	1
F1034	Flaring Tool, 3/4", Individual	EA	1
F1078	Flaring Tool, 7/8", Individual	EA	1

SWAGING

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
S4000	4 pc Swaging Set - 1/4", 3/8", 1/2", 5/8"	PK	1
S5000	5 pc Swaging Set - 1/4", 3/8", 1/2", 5/8", 3/4"	PK	1
S6000	6 pc Swaging Set - 1/4", 3/8", 1/2", 5/8", 3/4", 7/8"	PK	1
S1014	Swaging Tool, 1/4", Individual	EA	1
S1516	Swaging Tool, 5/16", Individual	EA	1
S1038	Swaging Tool, 3/8", Individual	EA	1
S1012	Swaging Tool, 1/2", Individual	EA	1
S1058	Swaging Tool, 5/8", Individual	EA	1
S1034	Swaging Tool, 3/4", Individual	EA	1
S1078	Swaging Tool, 7/8", Individual	EA	1

PLUMBING

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
S3000	3 pc Plumbing Set - 1/2", 3/4", 1"	EA	1

Orbital Flare

The hilmer Orbital Flare was designed to produce quality flares – again and again. A tube-stop arrow allows precise positioning and placement so you can keep that nickel in your pocket. Plus, a clutch mechanism stops the flare to eliminate cracking the tube.

Features & Benefits

- Precise Flares, Every Time:** An off-center mounted cone spins on an axis to effectively produce quality flares.
- No Cracked Tubes:** A clutch mechanism stops the flaring when the job is done.
- Simple Setup:** A clothespin-inspired, spring-loaded block grips the tube securely.
- Easy to Position:** A tube-stop arrow slides to set correct height and positioning while ball detents allow for easy flaring cone alignment.
- Extra Confidence:** A leak-proof blank-off valve isolates the pump from the system for accurate vacuum readings and easy oil change without losing a vacuum.



1838952



CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838952	Orbital Flare - 45°	3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	8-1/2" x 4-5/8" x 5-1/4"	3.8 lbs.	EA	1

Orbital Flare Kit with Tubing Cutter and Deburring Tool

The hilmer Orbital Flare Kit comes with everything you need to produce quality flares – again and again. The kit includes hilmer's Large Diameter Tubing Cutter (item #1885384) for easy kink-free cuts, a Pocket Size Deburring Tool (item #1891258) to smooth things over and, of course, our industry-leading Orbital Flare (item #1838952).

Features & Benefits

- Storage:** Kit included for convenient storage.
- Precise Flares, Every Time:** An off-center mounted cone spins on an axis to effectively produce quality flares.
- No Cracked Tubes:** A clutch mechanism stops the flaring when the job is done.
- Accurate Cutting:** A unique, four-roller tracking system keeps the tube from threading.
- Professional Deburring:** Conveniently deburr tubes and fittings 1/4" nominal and larger.



1937685



CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937685	Orbital Flare with Large Diameter Tubing Cutter and Pocket Size Deburring Tool	3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	9" x 12-1/2" x 2-1/2"	5.8 lbs.	EA	1

TUBE WORKING | TOOLS

FLARING TOOLS CONT'D

Large Basic Flare

The hilmor Large Basic Flare has all the advantages of hilmor flaring tools with the bulked-up size to handle 3/4" to 1-1/8" tubes. And it can fit into spaces other flaring and swaging tools can't.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bar are made to be knocked around.

Control: Steel wing nuts make it easy to hold pipe secure.

Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838955	Large Basic Orbital Flare - 45°	3/4", 7/8", 1-1/8"	7" x 6" x 5-1/4"	3.7 lbs.	EA	1



1838955

Basic Flare

The hilmor flaring tools are the no-muss, no-fuss way to flare. Our Basic Flare handles 1/8" to 3/4" tubes.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bar are made to be knocked around.

Control: Steel wing nuts make it easy to hold pipe secure.

Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838956	Basic Orbital Flare - 45°	1/8", 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	8-3/4" x 5-1/4" x 4-1/4"	2.4 lbs.	EA	1



1838956

Quick-Engage Flare and Swage Kit

Extra appendages are hard to come by these days. Instead, opt for the all-new hilmor Quick-Engage Flare and Swage. Simple setup, precise positioning and a secure hold allow you to quickly conquer and move on to the next job.

Features & Benefits

Less Work: Allows for faster flares and swages because it requires fewer rotations.

Simple Setup: A clothespin-inspired, spring-loaded block grips the tube securely.

Easy to Position: A tube-stop arrow slides to set correct height and positioning, while ball detents allow for easy flaring cone alignment.

Product Specifications

1 Bar - 45°, 1 Quick-Engage Yoke, 1 Flare Cone 3/16" to 3/4", 5 Swage Heads

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838947	Quick-Engage Flare and Swage Kit	3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	8-1/2" x 4-5/8" x 7-1/2"	3.5 lbs.	EA	1



1838947



Large Flare/Swage

When you need a precise, quality flare or swage, the hilmor Large Flare/Swage delivers. Its compact design allows it to fit where others can't. And, with a long handle for additional leverage, it can help give you a leg up on any job.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bar are made to be knocked around.

Control: Steel wing nuts make it easy to hold pipe secure.

Small Space Capable: A compact design allows it to be used even in cramped spaces.

Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838948	Large Flare/Swage - 45°	3/4", 7/8", 1-1/8"	7" x 6" x 6"	6.4 lbs.	EA	1



1838948



Basic Flare/Swage Kit

The hilmor Basic Flare/Swage Kit has the no-muss, no-fuss tools to flare AND swage tubes in a variety of sizes. The small Basic Flare bar handles 1/8" to 7/16" tubes, while the large Basic Flare bar helps you take on 1/2" to 3/4" tubes. Swage head attachments for sizes 1/8" to 3/4" make an entirely new tool for tube working.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bars are made to be knocked around.

Control: Steel wing nuts make it easy to securely hold tube.

Small Space Capable: A compact design allows it to be used even in cramped spaces.

Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

Product Specifications

2 Bars - 45°, 1 Basic Flare/Swage Yoke, 1 Flaring Head, 5 Swage Heads

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937684	Basic Flare/Swage Kit	1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8", 3/4"	9" x 12-1/2" x 2-1/2"	5.0 lbs.	EA	1



1937684

TOOLS | TUBE WORKING

SWAGING TOOLS

Compact Swage Tool Kit

The hilmor Compact Swage Tool is taking swaging to the next level. It has the power to swage 2-1/8" tubing and the control to swage 1/4" tubing without a crack. With its small, pistol-shape design, it can fit in the smallest of spaces. This patented design can reduce on-the-job fatigue with its easy setup and one-handed operation made possible by an innovative hydraulic mechanism and release button. It's even equipped for multiple sizes.

Features & Benefits

- Picture-Perfect Swaging: Simply select the correct head, place it on the tool and make a quality swage.
- Less Effort, More Control: The power to swage 7/8" tubing and the control to swage 3/8" without splitting the tube.
- Small Space Capable: A compact design allows it to be used even in cramped spaces.
- One-handed Operation: The lever mechanism and release button allow for one-handed swaging without the fatigue.

Product Specifications

3/8", 1/2", 5/8", 3/4", 7/8" Expander Heads, Deburrer, Compact Swage Tool

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839015	Compact Swage Tool Kit	3/8", 1/2", 5/8", 3/4", 7/8"	9" x 1-3/4" x 5"	8.5 lbs.	EA	1

Expander Heads & Replacement Parts

Item Numbers	Descriptions	Sizes
1964042	CSEH14 Expander Head	1/4"
1839016	CSEH516 Expander Head	5/16"
1839017	CSEH38 Expander Head	3/8"
1839018	CSEH12 Expander Head	1/2"
1839019	CSEH58 Expander Head	5/8"
1839020	CSEH34 Expander Head	3/4"
1839021	CSEH78 Expander Head	7/8"

Item Numbers	Descriptions	Sizes
1839022	CSEH118 Expander Head	1-1/8"
1839023	CSEH138 Expander Head	1-3/8"
1839024	CSEH158 Expander Head	1-5/8"
1964043	CSEH218 Expander Head	2-1/8"
1839025	CSB Compact Swage Body Kit	N/A
1891258	Pocket Size Deburring Tool	N/A
Recommended Replacement Hydraulic Fluid		HV-15



1839015



hilmor

Deluxe Compact Swage Tool Kit

Thoughtfully designed to fit into the smallest of spaces, the hilmor Compact Swage Tool can knock out the picture-perfect swage in just one shot. A patented hydraulic mechanism and release button let you take care of any job single-handedly.

Features & Benefits

- Picture-perfect Swaging: Simply select the correct head, place it on the tool and make a quality swage.
- One-handed Operation: The lever mechanism and release button allow for one-handed swaging without the fatigue.

Product Specifications

1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1-1/8", 1-3/8", 1-5/8" Expander Heads, Pocket Size Deburring Tool, Compact Swage Tool

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1964041	Deluxe Compact Swage Tool Kit	1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1-1/8", 1-3/8", 1-5/8"	9" x 1-3/4" x 5"	8.5 lbs.	EA	1

Additional Expander Heads

Item Numbers	Descriptions	Sizes
1964043	CSEH516 Expander Head	2-1/8"



1964041

hilmor

Punch Swage Set

Get the sizes you need, right when you need them, with the hilmor 5-piece Punch Swage Set. Punches are available in a set with 1/4", 5/16", 3/8", 1/2" and 5/8".

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS	WEIGHT	UOM	ORDER MUL.
1839008	Punch Swage Set	1/4", 5/16", 3/8", 1/2", 5/8"	1/4" - Dia: 1/2"; H: 3" 5/16" - Dia: 2/3"; H: 3" 3/8" - Dia: 2/3"; H: 3" 1/2" - Dia: 7/8"; H: 3-3/4" 5/8" - Dia: 7/8"; H: 3-3/4"	3 oz.	EA	1



1839008

hilmor

Multi-Swage Punch

One punch. Multiple tube sizes. The hilmor Multi-Swage Punch is designed to fit 1/4" to 5/8" tubes. Made of steel and chrome-coated for a durable design with less friction against the tube.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS	WEIGHT	UOM	ORDER MUL.
1839009	Multi-Swage Punch	1/4" to 5/8" (1/4", 5/16", 3/8", 1/2", 5/8")	Dia: 7/8"; H: 5-1/4"	6 oz.	EA	1



1839009

hilmor

TUBE WORKING | TOOLS

TUBE BENDING

Compact Bender Kits

Small in size. Big on advantages. The hilmer Compact Bender will help you get the job done right – from start to finish. Small-space capabilities, one-handed operation and precise bends – you get it all. A universal crossbar and color-coded mandrels provide simple setup and easy size identification. An advanced mandrel design and quick-release mechanism allow for an easy tube release. You can count on precise bends of 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" and 7/8" tubing up to 90°.

Features & Benefits

- Simple Setup:** Universal crossbar and color-coded mandrels make identifying and changing sizes quick and easy.
- One-handed Operation:** A ratcheting mechanism and innovative release lever allow for bending with one hand.
- Small Space Capable:** A compact design allows it to fit where others can't.

Product Specifications

1839032 Compact Bender Kit

Body and crossbar for 1/4" to 7/8", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" and 7/8" mandrels.

1926598 Compact Bender Kit with Reverse Bending Attachment

Body and crossbar for 1/4" to 7/8", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" mandrels and Reverse Bending Attachment



1926598

hilmer

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839032	Compact Bender Kits	1/4", 5/16"	16-3/8" x 12-1/4" x 3-1/4"	8.8 lbs.	EA	1
1926598	Compact Bender Kit with Reverse Bending Attachment	1/4", 5/16"	16-3/8" x 12-1/4" x 3-1/4"	10.8 lbs.	EA	1

Replacement Parts		
Item Numbers	Descriptions	Sizes
1839035	Compact Bender Mandrel	1/4"
1839036	Compact Bender Mandrel	5/16"
1839037	Compact Bender Mandrel	3/8"
1839038	Compact Bender Mandrel	1/2"

Replacement Parts cont'd		
Item Numbers	Descriptions	Sizes
1839039	Compact Bender Mandrel	5/8"
1839040	Compact Bender Mandrel	3/4"
1839041	Compact Bender Mandrel	7/8"

Tri-Tube Benders

From start to final bend, the hilmer Tri-Tube Benders have you covered.

Features & Benefits

- Precise Angles:** Calibrated markings for making accurate bends up to 180°.
- Comfortable Grip:** Non-slip grip.
- Lighten Your Load:** Constructed out of lightweight die-cast aluminum.
- Indexing Handle:** Compact design for tight access (1839026 only).

Product Specifications

Tube Materials: Soft Tubing Only - Copper, Steel, Aluminum, Brass

CATALOG NO.	DESCRIPTION	TUBE SIZE (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839026	Tri-Tube Bender	3/16", 1/4", 5/16", 3/8"	2-1/2" x 6" x 12-1/2"	1.8 lbs.	EA	1
1839027	Tri-Tube Bender	3/16", 1/4", 3/8", 1/2"	3-1/2" x 7-1/2" x 7"	2.5 lbs.	EA	1



1839026



1839027

hilmer

Spring Benders

Getting an accurate bend by hand isn't always easy. But, our Spring Benders can help simplify things. Four different benders are included to fit 1/4", 3/8", 1/2" and 5/8" tubing. Simply slip the Spring Bender over soft copper or aluminum tubing, and count on the spring to keep the tube from kinking.

Product Specifications

Tube Materials: Soft Tubing Only - Copper, Steel, Aluminum, Brass

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839031	Spring Benders	1/4", 3/8", 1/2", 5/8"	1/4" - 11-1/3" 3/8" - 11-1/3" 1/2" - 11-1/3" 5/8" - 11-1/3"	5 oz.	EA	1



1839031

hilmer

TOOLS | TUBE WORKING

TUBE CUTTING

Kut-All Plastic Tube and Hose Cutter

Tough, durable nylon. Blade closes into its own handle for safe handling. Replaceable high carbon, teflon coated steel blades. Ideal for cutting up to 1-1/8" I.D. plastic tubing, reinforced plastic tubing, rigid plastic pipe, and rubber hose.



PK-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PK-2	Kut-All Plastic Tube and Hose Cutter	EA	1

One-Handed PVC/Hose Cutter

The ratchet system holds the blade in place while you adjust your grip to increase the pressure. The high carbon steel blade maintains sharpness and resists chipping. These cutters can be used for cutting PVC, CPVC, Polyethylene, PEX, and ABS tubing. The cutters have a quick-blade reset and can be used as a one handed operation. With the handle locking strap for safe storage, the easy replacing blade feature, and the ergonomically designed handle, these cutters are a perfect addition to any tool box.



6-T1191

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-T1191	Capacity: 1/8" to 1-5/8"; Length: 8-1/4" (210mm)	EA	1

Small Diameter Tubing Cutters

When you're in a tight space, this tool can definitely cut it. hilmor's ruggedly durable Small Diameter Tubing Cutters offer precision cuts with minimal burrs.

Features & Benefits

- Rugged and Durable:** An ergonomic, cast-zinc body and shock-resistant steel wheel reduce burrs while increasing life and durability.
- Small Space Capable:** Compact design allows this tool to fit where others can't.
- Maximum Protection:** A full-stop threading system offers maximum protection for cutting wheels.
- Precision Flare Cutting:** A flare-cutting groove allows for precision removal of material. Item 1885383 only.
- Spare Blade Storage:** A bonus blade comes with the tool and can be stored easily in the handle. Items 1885382 & 1885383 only.



1885381 1885382 1885383



CATALOG NO.	DESCRIPTION	DIAMETERS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885381	Small Diameter Tubing Cutter	1/8" - 5/8"	1-3/8" x 3/4" x 1-3/4"	4 oz.	EA	1
1885382	Small Diameter Tubing Cutter	1/8" - 1"	1-3/4" x 3/4" x 2-3/8"	6 oz.	EA	1
1885383	Small Diameter Tubing Cutter	1/8" - 1"	2" x 1" x 3"	8 oz.	EA	1

Large Diameter Tubing Cutters

This cutter can talk the talk without walking the walk. hilmor's Large Diameter Tubing Cutters feature a four-roller tracking system to keep the tube from threading. All the while, a shock-resistant steel wheel cuts through the tube like a knife through butter.

Features & Benefits

- Rugged and Durable:** An ergonomic, cast-zinc body and shock-resistant steel wheel reduce burrs while increasing life and durability.
- Precision Flare Cutting:** A flare-cutting groove allows for precision removal of material. Item 1885383 only.
- Maximum Protection:** A full-stop threading system offers maximum protection for cutting wheels.
- Spare Blade Storage:** A bonus blade comes with the tool and can be stored easily in the handle.
- Accurate Cutting:** A unique, four-roller tracking system keeps the tube from threading.
- Professional Deburring:** Conveniently deburr tubes with a replaceable machinist's reamer.



1885385



1885384



CATALOG NO.	DESCRIPTION	DIAMETERS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885384	Large Diameter Plastic Tubing Cutter	1/8" - 1-3/8"	2-3/4" x 1-3/4" x 6-1/4"	1.4 lbs.	EA	1
1885385	Large Diameter Tubing Cutter	1/8" - 1-3/4"	3" x 1-3/4" x 7-7/8"	1.7 lbs.	EA	1

TUBE WORKING | TOOLS

TUBE CUTTING CONT'D

Plastic Tubing Cutter

We've cut out the unnecessary complexity so you can cut plastic. hilmer's Plastic Tubing Cutter gets the job done with ease. Simple design and intuitive features allow you to get a handle on any cut.

Features & Benefits

Rugged and Durable: An ergonomic, cast-aluminum body and stainless steel blade increase life and durability.

Comfortable Grip: A rubberized handle makes it easier to use in wet and dirty environments.

Easy to Open and Close: A conveniently positioned locking latch allows for true one-handed operation.

CATALOG NO.	DESCRIPTION	DIAMETER	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885388	Plastic Tubing Cutter	1-5/16" MAX OD	11" x 5-1/2" x 1-2/5"	13 oz.	EA	1
1885390	Plastic Tubing Cutter Rep Blade	NA	NA	NA	EA	1



1885388



hilmer

Ratcheting Plastic Tubing Cutters

1885393 Features & Benefits

Rugged and Durable: An ergonomic, cast-aluminum body and stainless steel blade increase life and durability.

Comfortable Grip: A rubberized handle makes it easier to use in wet and dirty environments.

Easy to Open and Close: A conveniently placed release button allows for true one-handed operation, while a locking tab secures the blade in place.

1885395 Features & Benefits

Rugged and Durable: An ergonomic, cast-aluminum body and high-carbon steel blade increase life and durability.

Comfortable Grip: Simply pull both handles apart to quickly start the next cut.

CATALOG NO.	DESCRIPTION	DIAMETER	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885393	Ratcheting Plastic Tubing Cutter	1-5/8" MAX OD	9" x 1-1/8" x 4-1/8"	1.0 lbs.	EA	1
1885395	Ratcheting Plastic Tubing Cutter	2-3/8" MAX OD	13-1/8" x 1-1/3" x 6"	2.5 lbs.	EA	1



1885393



1885395

hilmer

ACCESSORIES

Small Tubing Cutter Wheels

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
1885386	Small Tubing Cutter Wheels - 2 Pack (Fits 1885381, 1885382)	PK	1
1885387	Tubing Cutter Wheels - 2 Pack (Fits 1885383, 1885384, 1885385)	PK	1
21024TCD	Replacement Deburrer for 1885384, 1885385	EA	1



1885386

1885387

hilmer

TOOLS | MANIFOLD GAUGES AND HOSES

MANIFOLDS

4-Valve Aluminum Manifold

We know that manifolds are your lifeline. So, when we decided to retool the features and design, we were meticulous down to the last detail.

Features & Benefits

Extra Confidence:	Built to last with a forged aluminum body. Designed to be leak-resistant with replaceable stainless steel valve seats, SAE-style O-rings and a securely seated, large sight glass.
Quick on the Job:	Get faster vacuum pulls with a true 3/8" bore throughout the valve.
Comfortable Grip:	A rubberized handle makes it easier to use in wet and dirty environments.
Glow in the Dark:	Light-activated paint illuminates, so you won't be left in the dark.
Built-in Pressure Reminder:	A pressure reminder allows you to set the pressure ring and reference it later.

Product Specifications

Accuracy:	Class 1 - 1% Accuracy (full scale)
Gauge Connection Type:	1/8" NPT Male Fitting
Valve Type:	Double O-ring Piston Style
Valve Seat (Orifice):	Replaceable Stainless Steel (SAE-style straight thread with O-ring)
Sight Glass:	Bonded steel with SAE-style straight thread with O-ring
Vacuum Port:	3/8" full bore (quantity 1)
Charge Ports:	1/4" (quantity 3)



1839130



1839131

CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (LXWXH) W/O HOOK	WEIGHT	TEMP.	PRESSURE RANGE LOW	PRESSURE RANGE HIGH	UOM	ORDER MUL.
1839109	4-Valve Aluminum Manifold w/60" Hoses and Ball Valve Adapters	R410A	8-7/8" x 4" x 7-1/8"	7.1 lbs.	F/C	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839128	4-Valve Aluminum Manifold w/60" Hoses and Ball Valve Adapters	HP22-407C-410A (Heat Pump)	8-7/8" x 4" x 7-1/8"	7.1 lbs.	NA	0/800 psi	0/800 psi	EA	1
1839130	4-Valve Aluminum Manifold w/60" Hoses and Ball Valve Adapters	R22-404A-410A	8-7/8" x 4" x 7-1/8"	7.1 lbs.	F	-30" HG/ 300/500 ps	0/800 psi	EA	1
1839111	4-Valve Aluminum Manifold w/o Hoses	R410A	8-7/8" x 4" x 7-1/8"	3.4 lbs.	F/C	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839129	4-Valve Aluminum Manifold w/o Hoses	HP22-407C-410A (Heat Pump)	8-7/8" x 4" x 7-1/8"	3.4 lbs.	NA	0/800 psi	0/800 psi	EA	1
1839132	4-Valve Aluminum Manifold w/o Hoses	R22-404A-410A	8-7/8" x 4" x 7-1/8"	3.4 lbs.	F	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839110	4-Valve Aluminum Manifold w/60" Hoses, Dual Readout Thermometer and Ball Valve Adapters	R410A	8-7/8" x 4" x 7-1/8"	7.3 lbs.	F/C	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839131	4-Valve Aluminum Manifold w/60" Hoses, Dual Readout Thermometer and Ball Valve Adapters	R22-404A-410A	8-7/8" x 4" x 7-1/8"	7.3 lbs.	F	-30" HG/ 300/500 psi	0/800 psi	EA	1

MANIFOLD GAUGES AND HOSES | TOOLS

MANIFOLDS CONT'D

2-Valve Aluminum Manifold

The rough-and-tumble durability of our 4-Valve with the simplicity of a 2-Valve design.

Features & Benefits

- Extra Confidence:** Built to last with a forged aluminum body. Designed to be leak-resistant with replaceable stainless steel valve seats, SAE-style O-rings and a securely seated, large sight glass.
- Comfortable Grip:** A rubberized handle makes it easier to use in wet and dirty environments.
- Easy to Read:** Improved graphics and high-contrast colors deliver precise readings at a glance
- Glows in the Dark:** Light-activated paint illuminates, so you won't be left in the dark
- Built-in Pressure Reminder:** A pressure reminder allows you to set the pressure ring and reference it later.

Product Specifications

- Accuracy:** Class 1 - 1% Accuracy (full scale)
- Gauge Connection Type:** 1/8" NPT Male Fitting
- Valve Type:** Double O-ring Piston Style
- Valve Seat (Orifice):** Replaceable Stainless Steel (SAE-style straight thread with O-ring)
- Sight Glass:** Bonded steel with SAE-style straight thread with O-ring
- Charge Ports:** 1/4" (quantity 3)



CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (LXWXH) W/O HOOK	WEIGHT	TEMP.	PRESSURE RANGE LOW	PRESSURE RANGE HIGH	UOM	ORDER MUL.
1839126	2-Valve Aluminum Manifold	R22-134A-404A	8-7/8" x 1-3/4" x 7-1/8"	7.1 lbs.	F	-30" HG/120/350 psi	0/500 psi	EA	1
1839134	2-Valve Aluminum Manifold	R22-404A-410A	8-7/8" x 1-3/4" x 7-1/8"	7.1 lbs.	F	-30" HG/120/500 psi	0/800 psi	EA	1

2-Valve Basic Manifold

The hilmer 2-Valve Basic Manifold with 60" Hoses provides all the features you've come to expect from a standard manifold, and then some. It has a durable design, improved accessibility and smart functionality. The 3-1/8" gauges have been optimized for greater readability with improved graphics, high-contrast color and glow-in-the-dark functionality. Sold with hilmer 60" hoses.

Features & Benefits

- Easy to Read:** Improved graphics and high-contrast colors deliver precise readings at a glance.
- Glows in the Dark:** Light-activated paint illuminates, so you won't be left in the dark.
- Comfortable Grip:** A rubberized handle makes it easier to use in wet and dirty environments.

Product Specifications

- Accuracy:** Class 1 - 1% Accuracy (full scale)
- Gauge Connection Type:** 1/8" NPT Male Fitting
- Valve Type:** Double O-ring Piston Style
- Charge Ports:** 1/4" (quantity 3)
- Hoses Included:** 1839153 Hose 60" - Set of 3



CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (L X W X H) W/O HOOK	WEIGHT	TEMP.	PRESSURE RANGE LOW	PRESSURE RANGE HIGH	UOM	ORDER MUL.
1839114	2-Valve Basic Manifold with 60" Hoses	R410A	7-1/4" x 3" x 6"	3.9 lbs.	F/C	-30" HG/300/500 psi	0/800 psi	EA	1
1932650	2-Valve Basic Manifold with 60" Hoses	R22-404A-410A	7-1/4" x 3" x 6"	3.9 lbs.	F	-30" HG/300/500 psi	0/800 psi	EA	1

Manifold Replacement Parts

CATALOG NO.	DESCRIPTION	LOCATION	UOM	ORDER MUL.
1932944	Analog Manifold Hook	1	EA	1
1932949	Manifold Valve Handle - Blue	2	EA	1
1932951	Manifold Valve Handle - Yellow	3	EA	1
1932950	Manifold Valve Handle - Red	4	EA	1
1932945	2-Valve Seat Assembly (2-1/4")	5	EA	1
1932946	4-Valve Seat Assembly (3-1/4", 1-3/8")	6	EA	1



TOOLS | MANIFOLD GAUGES AND HOSES

MANIFOLD GAUGES

Manifold Gauge

DiversiTech's MG-1 Manifold Gauge provides the technician with a precision diagnostic and monitoring analog gauge set complete with hoses.

The Manifold Gauge and Hose Set includes:

- 2 valve brass manifold
- 5' long high pressure hose set
- For use with the following refrigerants:
 - R-410A
 - R-22
 - R-407C
- Detailed gauge readings in PSI and °F



MG-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MG-1	Manifold Gauge and Hose Set	EA	1
MG-RGB	Replacement Gauge - Blue	EA	1
MG-RGR	Replacement Gauge - red	EA	1

Leak Test Gauge

This Gas gauge test is ideal for teasing all new installations of or leaks and passing inspection code. The special sensitive diaphragm gauges for more accurate low pressure readings.



TG-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TG-05	Leak Test Gauge - 3/4" FPT., 15 psi	EA	1
TG-30-12	Leak Test Gauge - 1/2" FPT. Conn., 30 psi	EA	1
TG-30	Leak Test Gauge - 3/4" FPT. Conn., 30 psi	EA	1
TG-30-1	Leak Test Gauge - 1" FPT. Conn., 30 psi	EA	1

Regulators

Rehvac nitrogen and CO₂ regulators feature a machined brass piston with internal bleed-down safety. This design makes the Rehvac regulator long lasting and reliable.



CT-475M

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CA-252C	Rehvac Adjustable Regulator, 0-250psi	EA	1
CT-475M	Regulator, N/CO ₂ - 0-475 psi	EA	1

Gauges

Rehvac replacement gauges are reliable and easy to read.



GA-06

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GA-06	Rehvac 600 psi Low Pressure Replacement Gauge	EA	1
GA-30	Rehvac 3000 psi High Pressure Replacement Gauge	EA	1

Analog Gauges

You need accurate readings, and you need them at a glance. hilmor gauges were made for just that. Simply choose the gauge you need, and put it to work.

Features & Benefits

- Easy to Read:** Improved graphics and high-contrast colors deliver precise readings at a glance.
- Rugged and Durable:** High-impact protective boots and steel construction mean dropping it won't ruin your day.

Product Specifications

Accuracy: Class 1 - 1% Accuracy (full scale) Fitting: 1/8" NPT Male connection
 Size: 3-1/8" (80mm) Gauge Included Parts: Protective boot and dial indicator ring



hilmor

CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (DEPTH, DIAMETER)	WEIGHT	TEMP.	PRESSURE RANGE	UOM	ORDER MUL.
1839082	Analog Gauge - Low Side (Blue)	R410A	1-3/4", 3-5/8"	6 oz.	F/C	-30" HG/ 300/500 psi	EA	1
1839088	Analog Gauge - Low Side (Blue)	R22-134A-410A	1-3/4", 3-5/8"	6 oz.	F	-30" HG/ 120/350 psi	EA	1
1839090	Analog Gauge - Low Side (Blue)	HP22-407C-410A	1-3/4", 3-5/8"	6 oz.	F	0/800 psi	EA	1
1839092	Analog Gauge - Low Side (Blue)	R22-404A-410A	1-3/4", 3-5/8"	6 oz.	F	-30" HG/ 300/500 psi	EA	1
1839083	Analog Gauge - High Side (Red)	R410A	1-3/4", 3-5/8"	6 oz.	F/C	0/800 psi	EA	1
1839089	Analog Gauge - Low Side (Red)	R22-134A-410A	1-3/4", 3-5/8"	6 oz.	F	0/500 psi	EA	1
1839091	Analog Gauge - Low Side (Red)	HP22-407C-410A	1-3/4", 3-5/8"	6 oz.	F	0/800 psi	EA	1
1839093	Analog Gauge - Low Side (Red)	R22-404A-410A	1-3/4", 3-5/8"	6 oz.	F	0/800 psi	EA	1

MANIFOLD GAUGES AND HOSES | TOOLS

MANIFOLD GAUGES CONT'D

Analog Gauge Replacement Parts

CATALOG NO.	DESCRIPTION	LOCATION	UOM	ORDER MUL.
1932986	Analog Gauge Lens	1	EA	1
1932947	Low Side Analog Gauge Boot w/Ring	2	EA	1
1932948	High Side Analog Gauge Boot w/Ring	3	EA	1



HOSES

Hoses

Rehvac hoses are designed specifically for air, nitrogen, or CO₂ service. Featuring a 600 psi working pressure and a 2200 psi burst pressure, Rehvac hoses are abrasion resistant and long lasting.



CW-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CW-15	Rehvac 15" Whip Hose	EA	1
CW-30	Rehvac 30" Whip Hose	EA	1

Refrigeration Hoses

The hilmar 36" and 60" hoses are designed with smart features including an extra abrasion-resistant layer for tough environments.



1839159



Features & Benefits

Superior Protection: An extra abrasion-resistant layer for the tough environments of HVAC/R.
Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.

Product Specifications

Max. Allowable Working Pressure: 800 PSI
Burst Pressure: 4000 PSI
Operating Temp.: -20°F to 180°F
End Connection: Straight by 45 degree

CATALOG NO.	DESCRIPTION	WEIGHT	DIAMETER	UOM	ORDER MUL.
1839156	36" Hose - Blue	6 oz.	1/4"	EA	1
1839158	36" Hose - Set of 3	6 oz.	1/4"	EA	1
1839159	36" Hose - VAC	6 oz.	3/8"	EA	1
1839150	60" Hose - Red	8 oz.	1/4"	EA	1
1839151	60" Hose - Blue	8 oz.	1/4"	EA	1
1839152	60" Hose - Yellow	8 oz.	1/4"	EA	1
1839153	60" Hose - Set of 3	8 oz.	1/4"	EA	1
1839154	60" Hose - VAC	8 oz.	3/8"	EA	1

Stainless Steel Evacuation Hoses

When pulling a vacuum, use hilmar Stainless Steel Evacuation Hoses to help prevent permeation and outgassing for a faster evacuation.



1950568, 1950569, 1980570, 1950651



Product Specifications

Max. Working Pressure: 800 PSI
Burst Pressure: 4000 PSI

CATALOG NO.	DESCRIPTION	DIAMETER	CONNECTION SIZE	UOM	ORDER MUL.
1950568	36" Stainless Steel Evacuation Hose	1/4"	1/4" x 1/4"	EA	1
1950569	36" Stainless Steel Evacuation Hose	3/8"	1/4" x 3/8"	EA	1
1950570	60" Stainless Steel Evacuation Hose	1/4"	1/4" x 1/4"	EA	1
1950651	60" Stainless Steel Evacuation Hose	3/8"	1/4" x 3/8"	EA	1

Refrigeration Hose Replacement Parts



CATALOG NO.	DESCRIPTION	LOCATION	UOM	ORDER MUL.
1932984	Hose Gaskets (3/8", Pack of 10)	1	EA	1
1932982	Hose Gaskets (1/4", Pack of 12)	2	EA	1
1932985	Hose Threaded Depressors, Pack of 6	3	EA	1

TOOLS | MANIFOLD GAUGES AND HOSES

BALL VALVE HOSES

Refrigeration Hoses with Ball Valve Extensions

Rated for 800 PSI working pressure to work with high-pressure refrigerants. Includes an easy-turn valve for added control of refrigerant loss.

Features & Benefits

Superior Protection: An extra abrasion-resistant layer for the tough environments of HVAC/R.
 Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.

Product Specifications

Max. Allowable Working Pressure: 800 PSI
 Burst Pressure: 4000 PSI
 Operating Temp.: -20°F to 180°F
 Hoses End Connection: Straight by Straight
 Ball Valve Extension Connection: Straight by 45°



1839143
hilmar

CATALOG NO.	DESCRIPTION	DIAMETER	WEIGHT	UOM	ORDER MUL.
1839140	60" Hose w/Ball Valve Ext - Red	1/4"	15 oz.	EA	1
1839141	60" Hose w/Ball Valve Ext - Blue	1/4"	15 oz.	EA	1
1839142	60" Hose w/Ball Valve Ext - Yellow	1/4"	15 oz.	EA	1
1839143	60" Hose w/Ball Valve Ext - Set of 4	1/4" & 3/8"	3.8 lbs.	EA	1

CATALOG NO.	DESCRIPTION	DIAMETER	WEIGHT	UOM	ORDER MUL.
1839144	60" Hose w/Ball Valve Ext - VAC	3/8"	1.3 lbs.	EA	1
1935930	72" Hose w/Ball Valve Ext - Set of 3	1/4"	3.0 lbs.	EA	1
1936001	72" Hose w/Ball Valve Ext - VAC	3/8"	1.5 lbs.	EA	1
1936002	72" Hose w/Ball Valve Ext - Set of 4	1/4" & 3/8"	4.5 lbs.	EA	1

Refrigeration Hoses with Ball Valve Ends

Our retooled hoses includes an easy turn valve for added control of refrigerant loss. Features an extra abrasion-resistant layer for superior protection in tough conditions. All of our hoses are rated for 800 PSI working pressure to work with the newest high-pressure refrigerants.

Features & Benefits

Minimize Refrigerant Loss: Easy-turn valve for added control of refrigerant loss.
 Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.
 Small Space Capable: A compact design allows it to be used even in cramped spaces.

Product Specifications

Max. Allowable Working Pressure: 800 PSI
 Burst Pressure: 4000 PSI
 Operating Temp.: -20°F to 180°F
 Hoses End Connection: Straight by 45 degrees



1935917
hilmar

CATALOG NO.	DESCRIPTION	DIAMETER	WEIGHT	UOM	ORDER MUL.
1935917	48" Hose w/Ball Valve Ext - Set of 3	1/4"	1.8 lbs.	EA	1
1935918	48" Hose w/Ball Valve Ext - Vacuum	3/8"	1.8 lbs.	EA	1
1935924	60" Hose w/Ball Valve Ext - Set of 3	1/4"	1.8 lbs.	EA	1
1935925	60" Hose w/Ball Valve Ext - Set of 4	1/4" & 3/8"	1.8 lbs.	EA	1
1935926	60" Hose w/Ball Valve Ext - Ball Valve	3/8"	1.8/1.0 lbs.	EA	1

HOSE ADAPTERS

Ball Valve Extensions

We all know that controlling refrigerant loss on the jobsite is a big deal. And the hilmar Ball Valve Extension is here to help. It is designed with an extra 6" of hose for additional length.

Features & Benefits

Superior Protection: An extra abrasion-resistant layer for the tough environments of HVAC/R.
 Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.

Product Specifications

Max. Allowable Working Pressure: 800 PSI
 Burst Pressure: 4000 PSI
 Operating Temp.: -20°F to 180°F
 End Connection: Straight by 45 degree



1839148, 1839149
hilmar

CATALOG NO.	DESCRIPTION	LENGTH	WEIGHT	DIAMETER	UOM	ORDER MUL.
1839148	Ball Valve Ext - Set of 3	8"	4 oz.	1/4"	EA	1
1839149	Ball Valve Ext - VAC	8"	4 oz.	3/8"	EA	1

MANIFOLD GAUGES AND HOSES / SERVICE TOOLS | TOOLS

VALVE CORE REMOVAL

Valve Core Removal Tool

Valve Core Removal Tools are designed to make work more efficient, but there's nothing efficient about losing tools or equipment. The hilmor Valve Core Removal Tool has a built-in rare earth magnet on the back of the plunger for convenient jobsite storage. After removing the core for evacuation or change-out, the plunger and valve core can be stored on the side of the unit. The tool comes in both 1/4" and 5/16" sizes. The hilmor Valve Core Removal Tool uses a spring gripper, as opposed to an O-ring to grab valve cores, increasing the life of the tool.

Features & Benefits

- Jobsite Storage:** Built-in rare-earth magnet for convenient plunger storage, minimizing lost parts on the job.
- Superior Versatility:** Vacuum tested to 20 microns and tested to 800 PSI working pressure.
- Reliable Core Gripper:** Securely and confidently remove valve cores for unrestricted flow.
- Vacuum Gauge Port:** 1/4" side flare to easily connect a vacuum gauge.

Product Specifications

- Max. Allowable Working Pressure:** 800 PSI
- Burst Pressure:** 4000 PSI
- Operating Temp.:** -20°F to 180°F



1947967 1947968
hilmor

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	CONNECTION SIZE	UOM	ORDER MUL.
1947967	Valve Core Removal Tool	2-1/2" x 5-3/4" x 7-7/8"	8 oz.	1/4"	EA	1
1947968	Valve Core Removal Tool	2-1/2" x 5-3/4" x 7-7/8"	8 oz.	5/16"	EA	1

Valve Core Removal Tool

Designed to remove and replace valve cores without losing the refrigerant charge. Connects to any 1/4" male flare fitting. Saves time, saves refrigerant.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
301	Valve Core Removal Tool	EA	1
VCRT-1	Valve Core Removal Tool	EA	1



301

GENERAL TOOLS

Hydrogauge

- Economical Pressure measurements.
- Replaces ordinary U-tube manometers
- Measures gas pressure easily and efficiently
- Direct reading, no plus or minus readings to add together as in old fashioned U-tubes
- Fills like a glass of water, no more air bubbles
- Strong magnet for mounting
- Heavy-duty construction
- Made of industrial grade, flexible PVC plastic
- Lightweight; Easy to use
- 6-HG15 water column height: 15"
- Plastic: 30" to 36" of industrial grade flexible plastic
- Hose fitting: All brass



6-HG15

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HG15	Hydrogauge Manometer	EA	1

Gas Pressure Test Kit

- Rugged, Heavy Duty Field Use.
 - Measure Natural gas (methane) or LP gas pressure across appliance manifolds.
 - Test gas stoves, furnaces, dryers and other gas appliances. Can also be used for other non-corrosive gases.
 - Large 2" sensitive diaphragm gauge is calibrated in inches of water column, also shows ounces per square inch
 - Magnified lens
 - Easier to use than a manometer
 - Range: 0 to 35 inches of water column (in. H₂O) 0 to 20 ounces per square inch (oz./in²)
- Includes: 2" sensitive diaphragm gauge; 3' of rubber tubing; brass fitting for quick connection to the appliance manifold 3/8" NPT; molded hard case.



6-GPK035

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-GPK035	Gas Pressure Test Kit	EA	1

TOOLS | SERVICE TOOLS

GENERAL TOOLS

007 Control Checker

A lifetime tool for monitoring and checking safety controls and operating controls. One unit for all voltages 24-460 VAC or DC without switching dials or meters. Compact, 4 oz, reliable. Saves troubleshooting. For normally closed controls, 007 connects in parallel with safety control. When the safety control opens in response to a problem in the system, 007 red LED turns on and remains on until reset manually. With intermittent problem, the LED remains on indicating the control is open. For operating controls, 007 verifies the status of all types indicating if there is power to the holding coil, the NC contact is open or closed, the thermostat contacts are open or closed, there is power to the contactor or starting holding coil, the overloads are open or closed, or there is a bad connection either on control or power side. NOTE: May use with lockout relays. Features battery check and reset switch. Includes 9-volt battery. 007 may be used over and over.



TC-007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TC-007	007 Control Checker	EA	1

U.S. Pat. No. 4,092,625.

Refractometer

The Refractometer can measure the freezing point of coolants, glycol and the Charge Condition of Batteries.



6-REF401

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-REF401	Refractometer	EA	1

Liquid Charger

Liquid low side charging adapter. For use with all CFC, HCFC and HFC refrigerants on 1/2 ton and larger units. 1/4" female SAE flare inlet, 1/4" male SAE flare outlet.



LC500

Features & Benefits

Less Work: Eliminates the need to heat the refrigerant.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
LC500	Liquid Charger	4.4" x 1" x 1"	0.65 lbs.	EA	1

Tattle-Tale Control Monitor

Identifies open controls in seconds. A single use monitoring device for determining which safety control has opened in response to a malfunction. Saves wasted hours tracing a safety control shutdown, even if intermittent. A quick, inexpensive way to visually spot where the problem is. Simply install in parallel with each safety control. When a control opens, the red indicator flag pops up. You will know immediately which area of the system is experiencing problems. Disposable, safe, simple to use, and pocket sized. Monitors safety controls, fuses, overload relays, motor protectors, freeze controls, limit controls, safety switches, fusible links, or steam control. CAUTION: Not to be used with lockout relays, use TC-007.



TT-24

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TT-120	Tattle-Tale Control Monitor - 120 Volt AC or DC, pack of 3	PK	1
TT-24	Tattle-Tale Control Monitor - 24 Volt AC or DC, pack of 3	PK	1
TT-240	Tattle-Tale Control Monitor - 240 Volt AC or DC, pack of 3	PK	1

Tolerance on all voltages shown is ± 20%. U.S. Pat. No. 4,250,480.

Deluxe Hi-Tension Hacksaw

Hackframe featuring handle and end pieces made of die cast aluminum. Lightweight yet rigid and highly tensioned (up to 25,000 psi) for cleaner, surer cut. Permanent blade pins feature versatile angling (up to 55°) for flush cutting. Blade can be inserted in handle to be used as compass saw. Frame will fit most standard tool boxes.



540-278HX0002



540-278BM0024

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-278HX0002	Hacksaw Frame with Blade	EA	1
540-278BM0024	Replacement Blades for Hacksaw Frame 12" x 24T	EA	10

Cable Tie Tensioning Tool

The hilmar Cable Tie Tensioning Tool can relieve the stress of the job. It seamlessly tightens heavy and lightweight cable, and cuts excess material with its easy-to-use lever.



1891190

Features & Benefits

Versatility: Works with both light and heavy-duty nylon cable ties.

Clean Cut: Easy-to-use cutting lever allows for flush cutting of excess material.




CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891190	Cable Tie Tensioning Tool	7-5/8" x 3-7/8" x 5/8"	10 oz.	EA	1

SERVICE TOOLS | TOOLS

GENERAL TOOLS CONT'D.

T-50 Series Staples and Staple Guns

The #1 selling staple gun in the world! Used extensively by building contractors, home do-it-yourselfers and specialty trade applications for tacking insulation, ceiling tile, window screening, cornerite, and 1001 other jobs ranging from light to heavy duty work. The T-50 Outward Clinch Staple Gun is ideal for fiberglass ductwork.



540-T50MOC
ARROW

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-506	3/8" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-508	1/2" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-509	9/16" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-T50M	T50M Heavy Duty Staple Gun Tacker	EA	1
540-T50MOC	T50MOC Outward Clinch Staple Gun	EA	1

Bi-Metal Reciprocating Saw Blades

Premium high speed steel with a flexible alloy back. Bi-metal blades fit all reciprocating saws with 1/2" shank.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-R8CCRF	Cast Iron-Ceramic Tile Carbide Grit 8" Long	EA	1
540-RB125W	12" x 6T Wood and Nail 3/4" x 12" x .050	EA	5
540-RB414M	4" x 14T Short Metal Cutting 3/4" x 4" x .035	EA	5
540-RB418M	4" x 18T Short Metal Cutting 5/8" x 4" x .035	EA	5
540-RB610H-DM	6" x 10T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB614H-DM	6" x 14T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB618H-DM	6" x 18T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB624H-DM	6" x 24T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB636DW	Drywall Cutting with V Head 5/8" x 6" x .035	EA	5
540-RB636W	6" x 6T Wood and Nail Slope 3/4" x 6" x .050	EA	5
540-RB656WS	6" x 6T Wood and Nail Scroll 3/4" x 6" x .050	EA	5
540-RB810H-DM	8" x 10T HD Metal Cutting 3/4" x 8" x .035	EA	5
540-RB814H-DM	8" x 14T HD Metal Cutting 3/4" x 8" x .035	EA	5
540-RB956W	9" x 6T Wood and Nail 3/4" x 9" x .050	EA	5

Magjumper

Magjumper from DiversiTech is a magnetic jumper for low voltage troubleshooting. It features a 20" length with magnetic tips that won't pop off like alligator clips sometimes can. It stays flexible even in cold weather and is perfect for recessed terminals. Magjumper is ideal for use on control boards, zone panels, thermostats, hydronics and automation controllers.



CT800

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MAG-1	Magjumper Terminal Kit	EA	1

4-Piece Hook and Pick Set

For separating wires, removing small fuses, "O" rings, retrieving washers and loose parts too small to pick up with your fingers. Bright-dipped, anodized hex-shaped aluminum handles with powerful magnet on end. Handy screw-in hook, pick, point and scribe. High carbon polished needle steel. All in a compact zip-lock vinyl pouch that fits in your shirt pocket! Set includes four screw-in tips plus handle.



MHP-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MHP-4	4-Piece Hook and Pick Set	EA	1

Test Leads

Alligator clips are covered by pure vinyl boots for flexibility at any temperature without cracking.



FTL3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACK4	2 Red and 2 Black Boots w/4 Alligator Clips	EA	1
FTL3	Pair, Red and Black - 36"	EA	1
FTL3D	Pair, Red and Black - Super Heavy Duty - 36"	EA	1

Multi Color Test Leads

Easy to use multi-colored test leads. 5 colors (white, red, black, yellow, green) with 2 connections each for easy testing on the job. Wire is 18 gauge, 18" long.



CT800

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CT800	Multi Color Test Leads	EA	1

Test Cord (Female)

Heavy duty red and black boots are on this cord. The cord has large clips, 3 wires, and is 24 in. With this cord, you can get power in remote areas without an 110V outlet. The voltage is 3 to 20V and has 125 AMPs. The wire gauge is 16 and the weight is .36 lb.



6-CT700F

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-CT700F	Test Cord (Female)	EA	1

Blind Rivet Tools

Heavy duty hand rivet tool that offers long handles to increase leverage and to secure the rivet in the nosepiece while the tool is in use. Powerful riveting capacity with 4 standard nosepieces to set 3/32", 1/8", 5/32", and 3/16" blind rivets.



5107

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5107	Heavy-duty tool; 4 interchangeable nose pieces to accommodate 3/32", 1/8", 5/32", 3/16" steel or aluminum rivets	EA	1

TOOLS | SERVICE TOOLS

GENERAL TOOLS CONT'D

Test Leads

These are replacement leads.



5031

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5031	Low Voltage test Leads; eight 22" long, color-coded leads with fully insulated alligator chips	EA	1
5041	Small Hook Type Low Voltage Test Leads; retractable hooks, 36" thermoplastic 22 gauge wire, nylon body/plunger, red/black	EA	1
5042	Large Hook Type Low Voltage Test Leads; retractable hooks, 36" PVC insulated 20 gauge wire, nylon body/plunger, red/black	EA	1
5046	Flexible Test Leads; steel alligator clips with vinyl red and black insulators; 36" 20 gauge wire; extremely flexible	EA	1

Clips

The clips are alligator clips and have vinyl red and black insulators.



5033

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5033	Steel Alligator Clips for use with test probes (.075"-.080"); 1-31/32" long; jaws open 5/16" max.; pack of 2 red, 2 black, 4 clips	PK	1
5035	Copper Alligator Clips; 1-31/32" long; jaws open 5/16" max.; crimper slotted screw connection, pack of 2 red, 2 black, 4 clips	PK	1
5036	Steel Test Clips; 20A, 2-7/16" long; jaws open 5/8" max.; crimper slotted screw connection, pack of 1 red, 1 black, 2 clips	PK	1

Cable Markers

Cable markers come in books of 450 markers with matching terminal markers. Markers are mounted on dispenser cards in the book. Cable markers are suitable for above and below ground applications. Books are made of vinyl impregnated cloth that resists moderate amounts of dirt, oil and heat. The blank Write-On Markers (WM1014) are made of durable vinyl film that resists water, oils, and fungus. They can also withstand extremes in temperature.



WM1002

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WM1002	Alpha-Numeric Cable Marker Book; contains 10 each: A-Z, 0-15, +, -, /	EA	36
WM1003	Numeric Cable Marker Book; contains 10 each: 1-45	EA	36
WM1009	Line and Terminal Cable Marker Book; contains 45 each: 1, 2, 3, A, B, C; contains 30 each: T1, T2, T3, L1, L2, L3	EA	24
WM1014	180 Blank Write-On Markers, 1/2" x 1-1/2"	EA	12

Grease Fittings

Case hardened steel fittings plated with yellow dip chromate and built-in ball checks. Assortment available in clear plastic box.



6311

6322

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6311	Grease Fittings: 1/4"-28 Tapered Thread; straight, pack of 8	PK	1
6312	Grease Fittings: 1/8" Pipe Thread; straight, pack of 5	PK	1
6321	Grease Fittings: 1/4"-28 Tapered Thread; 90°, pack of 3	PK	1
6322	Grease Fittings: 1/8" Pipe Thread; 90°, pack of 3	PK	1
6310X	Assortment includes: 6311, 6312, 6321, 6322	PK	1

BRUSHES

Chip Brushes

100% pure bristle, wood handle. Poly sleeve over bristles. Inexpensive (use once and throw away). Excellent for applying duct adhesive.



B-501

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-501	Chip Brush - 1"	EA	36
B-502	Chip Brush - 1-1/2"	EA	36
B-503	Chip Brush - 2"	EA	24
B-504	Chip Brush - 2-1/2"	EA	12
B-505	Chip Brush - 3"	EA	12

Welder's Brush

Stainless steel bristles used for cleaning all metals. Great for cleaning aluminum prior to soldering.



B-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-4	Welder's Brush	EA	12

Tin Handle Acid Brushes

Manufactured with electrolyte tin plate and filled with 100% pure stiff horsehair, tied with a steel staple. This combination gives lasting qualities when used with heat and acids or other cleaning agents.



B-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-1	Tin Handle Acid Brush 3/8"	EA	144
B-2	Tin Handle Acid Brush 1/2"	EA	144

Refrigerator Coil Brush

Clean refrigerator coils, fan blades and areas under and behind appliances. 27-1/2" in length with 11-3/4" brush length. Bristles are 3/4" on the end tapering to 1-1/2" toward the handle.



B-27

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-27	Refrigerator Coil Brush	EA	1

SERVICE TOOLS | TOOLS

BRUSHES CONT'D

Fin Whisk

A plastic handled whisk for cleaning condenser and evaporator fins.



B-26

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-26	Fin Whisk Brush	EA	12

Condenser/Heat Exchanger Brushes

Ideal for cleaning mineral deposits from inside metal tubes. Especially recommended for use with power tools, although handle for manual use is available.



B-622

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-622	Condenser/Heat Exchanger Brush – 3/4" Brass 12-24 Female	EA	1

2-in-1 Copper Tube Cleaning Brush

Easy to hold combination tool that really works. One end cleans the fitting. The other cleans the tube.



B-998

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-998	2-in-1 Copper Tube Cleaning Brush – 3/4" ID (7/8" OD)	EA	1

Parts Cleaning Brush

The heavy duty black polypropylene bristles are secured in a strong plastic handle.



542-25015

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
542-25015	Parts Cleaning Brush	EA	12

Carbon Steel Curved Handle Scratch Brush

Carbon Steel Curved Handle Scratch Brushes are used for general purpose cleaning.



B-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-10	Carbon Steel Curved Handle Scratch Brush	EA	1

Duct Cleaning Brush

These brushes are made of black fiber bristles twisted in wire. They are 1-1/8" diameter by 7" brush x 48" overall length. These are idea for cleaning hard to reach areas in duct work.



542-76220

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
542-76220	Duct Cleaning Brush	EA	1

Copper Tube Fitting Brushes

Highest quality brushes to clean fittings faster, easier and more safely. Made with strong, resilient, rustproof stainless steel bristles secured in a 4-ply wire with easy-to-grip plastic handle. Economy models feature same quality stainless steel, but secured in 2-ply wire.



B-927

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-124	Copper Tube Fitting Brush – Economy 1/4" O.D., 9/32" Brush Dia.	EA	6
B-125	Copper Tube Fitting Brush – Economy 3/8" O.D., 13/32" Brush Dia.	EA	6
B-126	Copper Tube Fitting Brush – Economy 1/2" O.D., 17/32" Brush Dia.	EA	6
B-127	Copper Tube Fitting Brush – Economy 5/8" O.D., 11/16" Brush Dia.	EA	6
B-128	Copper Tube Fitting Brush – Economy 3/4" O.D., 13/16" Brush Dia.	EA	6
B-129	Copper Tube Fitting Brush – Economy 7/8" O.D., 15/16" Brush Dia.	EA	6
B-131	Copper Tube Fitting Brush – Economy 1-1/8" O.D., 1-1/4" Brush Dia.	EA	6
B-132	Copper Tube Fitting Brush – Economy 1-3/8" O.D., 1-1/2" Brush Dia.	EA	6
B-924	Copper Tube Fitting Brush – Economy 1/4" O.D., 9/32" Brush Dia.	EA	1
B-925	Copper Tube Fitting Brush – Economy 3/8" O.D., 13/32" Brush Dia.	EA	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-926	Copper Tube Fitting Brush – Economy 1/2" O.D., 17/32" Brush Dia.	EA	1
B-927	Copper Tube Fitting Brush – Economy 5/8" O.D., 11/16" Brush Dia.	EA	1
B-928	Copper Tube Fitting Brush – Economy 3/4" O.D., 13/16" Brush Dia.	EA	1
B-929	Copper Tube Fitting Brush – 7/8" O.D., 15/16" Brush Dia.	EA	1
B-930	Copper Tube Fitting Brush – 1" O.D., 1-1/8" Brush Dia.	EA	1
B-931	Copper Tube Fitting Brush – 1-1/8" O.D., 1-1/4" Brush Dia.	EA	1
B-932	Copper Tube Fitting Brush – 1-3/8" O.D., 1-1/2" Brush Dia.	EA	1
B-934	Copper Tube Fitting Brush – 1-5/8" O.D., 1-3/4" Brush Dia.	EA	1
B-935	Copper Tube Fitting Brush – 2-1/8" O.D., 2-1/4" Brush Dia.	EA	1

TOOLS | SERVICE TOOLS

COMPRESSOR TOTE

Compressor Tote

Makes light work of a heavy job. Powder coated, strong steel construction. Recommended for use with all compressors up to 5 tons. Compatible with high efficiency compressors. Pick up a compressor from its box. Carry a compressor up a ladder. Now with black protective finish.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACT-6	Compressor Tote	EA	6



ACT-6

FIN TOOLS

Fin Straightening Tools

A condenser should work as efficiently as you. These tools make it easy to remove debris and straighten fins.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	UOM	ORDER MUL.
T-100	Fin Tool Kit	8, 9, 10, 11, 12, 14 FPI	5-3/4" x 2" x 1-1/2"	EA	1
T-101	Fin Tool Kit	13, 15, 16, 17, 18, 20 FPI	5-3/4" x 2" x 1-1/4"	EA	1
T-300	Fin Tool	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20 FPI	12-1/4" x 4" x 1-1/2"	EA	1
T-400	Fin Tools - Set of 6	8 & 10, 9 & 15, 11 & 13, 12 & 14, 16 & 17, 18 & 20 FPI	7-1/2" x 2-3/4" x 1-1/4"	EA	1
T-412	Fin Comb	12 and 14 FPI	8-3/4" x 2-1/4" x 1/2"	EA	1
T-417	Fin Comb	16 and 17 FPI	8-3/4" x 2-1/4" x 1/2"	EA	1
T-418	Fin Comb	18 and 20 FPI	8-1/2" x 2-1/4" x 1/2"	EA	1



hilmar

INSPECTION MIRRORS

Inspection Mirrors

Leaks can't hide anymore with hilmar Inspection Mirrors. With handles that extend, the telescoping inspection mirrors truly do go above and beyond.



M-1 M-2 M-3 M-5

hilmar

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
M-1	1-1/4" Circular Telescoping Mirror, Handle Extends 6-1/4" to 18-1/4"	10" x 1/4" x 2-1/2"	3.2 oz.	EA	1
M-2	2-1/4" Circular Telescoping Mirror, Handle Extends 10" to 14"	12-1/2" x 1/4" x 3-1/4"	2.2 oz.	EA	1
M-3	2-1/8" x 3-1/2" Rectangular Telescoping Mirror, Handle Extends 11-1/4" to 15-1/4"	14-1/2" x 1/2" x 4"	3.8 oz.	EA	1
M-5	1" x 2" Oval Telescoping Mirror, Handle Extends 8" to 21"	9-3/4" x 3/4" x 2-1/4"	3.2 oz.	EA	1

PURGE TOOLS

Nitrogen Purge Tool

The Nitrogen Purge Tool is a quick and easy way to purge copper pipes with nitrogen. Then, with a turn of the dial, quickly switch to a very low flow of nitrogen to properly braze the copper. It has a durable aluminum design so you can just throw it into your tool bag when you are done.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DP-1	Nitrogen Purge Tool	EA	1



DP-1

Nitrogen Purge Tool

The hilmar Nitrogen Purge Tool is rugged and durable - a lot like you.

Features & Benefits

Regulates Nitrogen Flow: Designed to regulate flow with 50 PSI inlet pressure. Maximum pressure of 200 PSI.
 Quick Change Dial: No flow indicator valve needed. Purge setting = 25-35 scfh @ 50 PSI, Braze setting = 3-6 scfh @ 50 PSI.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMNPT01	Nitrogen Purge Tool	2" x 3" x 2"	1 lb.	EA	1



HMNPT01

hilmar

SERVICE TOOLS | TOOLS

REAMERS

Deburring Tool

Whether they're inside or outside, copper or plastic, hilmor Deburring Tool can smooth things over. Our Pocket Size Deburring Tool lets you put your silky-smooth signature on even the smallest pieces of tubing.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891258	Deburring Tool	5-1/2" x 3/8" x 3/8"	7 oz.	EA	1

Deburrer, 1/4 in. - 5/8 in.

Whether they're inside or outside, copper or plastic, hilmor Deburring Tools can smooth things over. With steel blades, the standard Deburrer works flawlessly on OD tubing from 1/4" to 1-5/8".



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X D)	WEIGHT	UOM	ORDER MUL.
1839052	Deburring Tool	5" x 9" x 2.38"	0.14 lb	EA	1

Swivel Head Deburring Tool

This Swivel Head Deburring Tool has the professional quality and the performance of a higher price deburring tool without the price tag. This product has two interchangeable blades.



CATALOG NO.	DESCRIPTION	HANDLE LENGTH	UOM	ORDER MUL.
6-T482	Swivel Head Deburring Tool	5-1/8" (130mm)	EA	1

Deburring Tool

The rotary style blade is perfect for removing burrs from holes and edges. Large ergonomic handle reduces user fatigue. Ships complete with two heavy duty blades - extra blade stores inside the handle. For copper, steel, aluminum, zinc, cast iron, brass and plastic tubing.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
210-F	Rotary Deburring Tool	1.05" x 2.4" x 8.4"	0.95 lb.	EA	1

Inner/Outer Reamer

Reams both inside and outside edges of tube at a 60° included angle with hardened cutting blades. Deburs both clockwise and counterclockwise. For 3/16" to 1-1/2" (5 mm to 38 mm) O.D. copper, aluminum and brass tubing.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
208-F	Inner/Outer Reamer	1" x 1" x 1"	1 lb.	EA	1
208-FSS	SS Inner/Outer Reamer	3.15" x 2.25" x 2.2"	0.63 lb.	EA	1

THERMOMETERS

Digital Thermometer

Temperature range from -40°F to 230°F.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
541-300	Digital Thermometer	EA	1

Deluxe Digital Pocket Thermometer

Deluxe Digital Pocket Thermometers are water and drop resistant and have a rugged construction. There is an auto power off and an F/C Switch. The probe is 2.5 in. and the range is from -40 degrees F to 300 degrees F or -40 degrees C to 150 degrees C. This thermometer comes with a protective cover with clip.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HDT304K	Deluxe Digital Pocket Thermometer	EA	1

Horizontal Refrigerator/Freezer Analog Thermometer

With this analog thermometer, you can use it either hanging or free standing. The easy to ready display can be seen with a horizontal reading. Both F and C scales are reflected on the thermometer and the range is -40° to 80°F (-40° to 27°C).



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-FT80H	Horizontal Refrigerator/Freezer Analog Thermometer	EA	1

Analog Pocket Thermometer with Magnifying Lens

- Range 6-320: -40° to 160°F
- Range 6-321: -0° to 220°F
- Rugged stainless steel probe



Includes: Protective sheath with pocket clip.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-321	Analog Pocket Thermometer: Range - 0 deg. to 220 deg. F	EA	1

TOOLS | SERVICE TOOLS / GASSES AND TORCHES

THERMOMETERS CONT'D

Refrigerator/Freezer Analog Thermometer

This analog thermometer is stainless steel and can be used either hanging or free standing. The easy to read round dial is in F only. There are temperature indicators with a range -20° to 80°F (-29° to 27°C).

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-FT80R	Refrigerator/Freezer Analog Thermometer	EA	1



6-FT80R

Dual Readout Thermometer

Features & Benefits

- Makes Calculations Easier:** The industry's only manifold-compatible compact thermometer with two readings to help simplify the calculation of superheat and subcool.
- Superior Versatility:** Use it on any gauge set, or remove it and use it independently.
- Reads Temperatures Quickly:** Two easy-to-use, K-style tube-clamp thermocouples get you to the temperature reading quickly.



1839106

Product Specifications

- Two Thermocouples:** 1839108 TCC Thermocouple Clamp Included
- Batteries:** AA x 1 (included)
- Battery Life:** 151 hours
- Connection Type:** K
- Temperature:** -76°F to 999.9°F
- Resolution:** .10° F/C
- Accuracy:** +-2.0 C°/+ -3.6°F
- Operating Temperature Range:** 0°C to +50°C (LCD)



hilmar

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839106	Dual Readout Thermometer	1-3/4" x 1-5/8" x 3-7/8"	11 oz.	EA	1

Thermocouple Clamp

Get right to it on up to 1-1/8" tubing with hilmar's Thermocouple Clamp. A K-style connection offers a secure fit and is easy to use with other devices. It is a perfect pairing for the hilmar Dual Readout Thermometer. When the job is done, it is easy to stow it away. Simply wrap the thermocouple wire around the handle, and secure the plug into the clamp.

Features & Benefits

- Fast, Precise Readings:** Gets right to the temperature reading up to 1-1/8" tubing.
- Secure Connection:** K-style connection provides a tight fit and easy use with other devices.
- Secure Storage:** Stow it away simply by wrapping the thermocouple wire around the clamp and securing the plug.

Product Specifications

- Connection Type:** K
- Accuracy:** +-2.0°C/+ -3.6°F
- Operating Temperature (plastic):** -40°F to 250°F



1839108

hilmar

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839108	Thermocouple Clamp	5-1/4" x 7/8" x 3-1/4"	3 oz.	EA	1

GASSES

Map-Pro and Propane

Map-Pro and Propane Gas are tanks that can be used to weld products.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
525-MT1	Map-Pro Gas - 14 oz.	EA	12
525-PT1	Propane Gas - 14.1 oz.	EA	12



525-MT1

525-PT1

GASSES AND TORCHES | TOOLS

TORCHES

Portable Hand Torch

Self igniting hand torch eliminates the need for a flint lighter. Lightweight and portable, this flame tool can be operated with Propane or Map-Pro (Propylene). Features trigger lock with instant safety release, full size comfort grip and 360° swivel tip. Operates in any position, even upside down. Includes swirl combustion tip end.



525-TORCH

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
525-TORCH	Portable Hand Torch	EA	1

Spark-Key Torch Ignitor

A safe, easy and reliable way to ignite a torch. No batteries needed, works with all gas torches, lights first time and every time, and good for over 100,000 strikes.



580500

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
580500	Spark-Key Torch Ignitor	EA	1
580512	Spark-Key Torch Ignitors, Pack of 12	EA	1

REPLACEMENT - RECOVERY CYLINDERS

Refrigerant Recovery Cylinders

Rehvac aluminum nitrogen cylinders from DiversiTech are commonly used in the HVAC industry for line cleaning and purging, pressure testing and braze purging. Made in the USA.

CATALOG NO.	DESCRIPTION	DOT CLASS	3/4" NPT PLUG	FLOAT SWITCH	WATER CAP.	TARE WT.	UOM	ORDER MULTIPLE
02033	30 lb.	4BA400	YES	NO	26.2 lbs.	17 lbs.	EA	1
02053	50 lb.	4BA400	YES	NO	47.7 lbs.	28 lbs.	EA	1
02100	100 lb.	4BW400	NO	NO	123 lbs.	48 lbs.	EA	1
02255	250 lb.	4BW260	YES	NO	239 lbs.	85 lbs.	EA	1



02053

02100

Caution: Never overfill cylinders. Maximum refrigerant capacity is limited to 80% of the water capacity of the cylinder in lbs. (see table above). DOT requires cylinders to be retested every five years. Some recovery equipment uses weight scales to cut off refrigerant fill at 80% of capacity. Be sure cylinder tare weight is correct for this type of equipment.

DOT Classification Example: 4BA400: 400 psi working pressure; 800 psi test pressure (double the working pressure); 1,600 psi minimum burst pressure (double the test pressure). Pressure relief/safety valve is set to release at between 75-100% of the test pressure. For example, in the 4BA400 tanks which have a 800 psi test pressure, the relief valve opens at between 600 psi and 800 psi.

Nitrogen Cylinders

Rehvac aluminum nitrogen cylinders from DiversiTech are commonly used in the HVAC industry for line cleaning and purging, pressure testing and braze purging. Made in the USA.



N20-SD

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
N20-SD	Rehvac Nitrogen Cylinder 57 cu ft	EA	1

CO₂ Cylinders

Rehvac aluminum CO₂ cylinders from DiversiTech are commonly used in the HVAC industry for condensate line cleaning.



C10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
C10	Rehvac 10# Aluminum Cylinder	EA	1
C1-2-6	Rehvac 1.2# Cylinder	EA	1
C20	Rehvac 20# Aluminum Cylinder	EA	1
C2-5	Rehvac 2.5# Cylinder	EA	1
C5	Rehvac 5# Aluminum Cylinder	EA	1

TOOLS | SHEET METAL TOOLS

SNIPS

Aviation Snips

Cut sheet metal, duct, stainless steel. Oh, and time. Hilmor Aviation Snips feature color-coded handles that make finding the right tool quick and easy. Plus, they have a comfortable grip and durable blades.

Features & Benefits

- Rugged and Durable:** High-carbon steel blades and a reinforced chrome silicon spring increase life and durability.
- Quick Identification:** Color-coded handle inserts and splines make identification simple.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.



CATALOG NO.	DESCRIPTION	CAPACITY CRS	CAPACITY SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891133	Left Cut Aviation Snip	18ga	22ga	10-3/8" x 3-1/2" x 7/8"	1.1 lbs.	EA	1
1891134	Right Cut Aviation Snip	18ga	22ga	10-3/8" x 3-1/2" x 7/8"	1.1 lbs.	EA	1
1891135	Straight Cut Aviation Snip	18ga	22ga	10-3/8" x 3-1/2" x 7/8"	1.1 lbs.	EA	1
1891172	Left/Right/Straight Cut Aviation Snip	18ga	22ga	10-3/8" x 9-1/2" x 9-1/2"	3.3 lbs.	EA	1
1891136	Bulldog Aviation Snip	16ga	20ga	9-1/2" x 3-1/2" x 7/8"	1.0 lbs.	EA	1
1891137	Left Cut Offset Aviation Snip	18ga	22ga	10-1/4" x 3-1/4" x 1"	1.1 lbs.	EA	1
1891138	Right Cut Offset Aviation Snip	18ga	22ga	10-1/4" x 3-1/4" x 1"	1.1 lbs.	EA	1

Aluminum Handle Snips

If longer, cleaner cuts are your thing, this pair of snips is for you. It's lightweight, aluminum composition makes this tool easy to handle and comfortable in your hands.

Features & Benefits

- Rugged and Durable:** Lightweight aluminum construction and replaceable blades increase life and durability.
- Less Work:** A 3-1/2" cut length requires fewer cuts to complete the job.
- Added Versatility:** Use either right or left hand to easily make cuts.



CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891173	Aluminum Handle Snips	24ga	28ga	13" x 4" x 1/2"	1.2 lbs.	EA	1
1891174	Replacement Blade	NA	NA	NA	NA	EA	1

V-Notcher

This tool puts the V-notch in HVAC/R. It's perfect for making clean 30° V-shaped cuts in sheet metal without distorting or crimping the material.

Features & Benefits

- Rugged and Durable:** High-carbon steel blades and a reinforced chrome silicon spring increase life and durability.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.
- V-Notcher:** Cuts V-shaped notch in sheet metal.



CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891180	V-Notcher	18ga	22ga	9-1/4" x 3" x 7/8"	1.2 lbs.	EA	1

Snap Lock Punch

You've heard the saying. A screw is temporary, but the Snap Lock Punch is forever. This tool can join sheet metal, duct or pipe in a snap for a hold that lasts a lifetime.

Features & Benefits

- Rugged and Durable:** Stainless steel blades and a reinforced chrome silicon spring increase life and durability.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.
- Snap Lock Punch:** For joining sheet metal, duct and pipe.



CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891182	Snap Lock Punch	18ga	22ga	8-7/8" x 3" x 7/8"	1.1 lbs.	EA	1

SHEET METAL TOOLS | TOOLS

SNIPS CONT'D

Hole Cutters

Power and precision. Cut holes in sheet metal like a knife through butter, and make them precise with metric and standard scales. Handles 2" to 20" holes.

Features & Benefits

Rugged and Durable: Includes a lightweight aluminum frame, with a milled bit for life and durability.
Added Versatility: Get two-in-one capabilities with both inch and metric scales.
Perfect Fit: Fits into any corded or cordless drill with a 1/4" or larger chuck.



CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891191	Hole Cutter	2" to 12"	7" x 3" x 1"	1.1 lbs.	EA	1
1891192	Hole Cutter	2" to 20"	11" x 3" x 1"	1.5 lbs.	EA	1
1891193	Hole Cutter Replacement Bit	NA	NA	NA	EA	1

Duct Slitting Tool

Don't let its unassuming design fool you. The Duct Slitting Tool can pierce, slit or scribe with the best of them.

Features & Benefits

Comfortable Grip: Over-molded handle reduces hand fatigue and won't slip or twist.
Extra Versatility: Designed to scribe lines or pierce and enlarge holes in sheet metal.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890990	Duct Slitting Tool	9-3/8" x 1-1/4" x 1-1/4"	6 oz.	EA	1

Duct Knife

It's time to cut ties with your old knife. The hilmar Duct Knife's hardened stainless steel blade can cut through duct board with silky, smooth precision.

Features & Benefits

Rugged and Durable: A hardened stainless steel blade increases life and durability.
Comfortable Grip: Over-molded handle reduces hand fatigue and won't slip or twist.
Added Versatility: Serrated and standard cutting edges made to cut duct board and flexible duct.
Simple Storage: A puncture-resistant nylon sheath with a belt loop allows for quick and easy storage.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891331	Duct Knife	11-5/8" x 5/8" x 1-3/8"	10 oz.	EA	1

BENDING AND BRAKING

Pocket Brake

The hilmar Pocket Brake is a portable sheet metal scoring tool that permits quick and precise, on the job, sheet metal fabrication.

Features & Benefits

Flexibility & Speed: Save time by performing onsite sheet metal fabrication.
Jobsite Fabrication: Ambidextrous design with twin metal scoring wheels provides a stable and accurate sheet metal scoring tool.
Ergonomic Design: Ergonomic design permits ambidextrous use.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HPB1701	Pocket Brake	4.33" x 2.90" x 2.85"	2 lbs.	EA	1

SHEET METAL TOOLS | TOOLS

BENDING AND BRAKING CONT'D

Hand Seamers

They can bend sheet metal. Flatten it. And flat-out get the job done. 1/4" depth marks ensure an accurate bend, and a reinforced spring stands the test of time.

Features & Benefits

Rugged and Durable: Stainless steel blades and a reinforced chrome silicon spring increase life and durability.

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

Quick Identification: 1/4" depth marks on the blades allow for quick bends.

Seamer: For bending and flattening sheet metal.



CATALOG NO.	DESCRIPTION	SIZES	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891185	Hand Seamers	3"	18ga	22ga	9-3/4" x 3-1/8" x 7/8"	1.5 lbs.	EA	1
1891183	Hand Seamers	3" Offset	18ga	22ga	8-1/4" x 5" x 3-1/4"	1.4 lbs.	EA	1
1891184	Hand Seamers	6"	18ga	22ga	10" x 6" x 3-1/2"	2.2 lbs.	EA	1

Folding Tools

This tool can fold without folding on the job. From end caps to folds for drive cleats, hilmer Folding Tools can handle it all. Strength meets precision with sight holes for depth alignment.

Features & Benefits

Folding Tool: Built for both 3/8" (10mm) and 1" (25mm) folds.

Accurate Folding: Equipped with sight holes for proper depth alignment.



CATALOG NO.	DESCRIPTION	CAPACITY - CRS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891146	12" Folding Tool	18ga	12" x 3-1/4" x 1/5"	1.4 lbs.		
1890985	18" Folding Tool	18ga	18" x 3-1/4" x 1/5"	2.1 lbs.		
1890986	24" Folding Tool	18ga	24" x 3-1/4" x 1/5"	2.8 lbs.		

Duct Stretcher

Two ducts. One hand. Bring it all together with the hilmer Duct Tool. Large gaps are no match. Its sleek aluminum body maintains a low profile to get into tight spaces.

Features & Benefits

Rugged and Durable: An all-aluminum body increases life and durability.

Small Space Capable: Features a low profile for use in tight spaces.

Added Versatility: Additional spacing holes allow wheels to be adjusted for use on large gaps.

Comfortable Grip: A cushion grip for reduced hand fatigue.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890987	Duct Stretcher	16" x 1/4" x 1-1/2"	11 oz.		
1890988	Rep Wheels - 2PK	NA	NA		

CRIMPING

Hand Crimpers

A crimping tool that won't cramp your style. Or your hand. hilmer Hand Crimpers come standard with contoured rubber grips that fit comfortably in your hands. Happy crimping!

Features & Benefits

Rugged and Durable: High-carbon steel blades and a reinforced chrome silicon spring increase life and durability.

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

Hand Crimper: For crimping round metal pipe.



CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891186	Hand Crimpers	18ga	22ga	9-3/4" x 3" x 7/8"	1.0 lbs.		
1891187	Hand Crimpers	18ga	22ga	9-3/4" x 3" x 7/8"	1.2 lbs.		

TOOLS | TOOLS STORAGE AND CASES

STORAGE CONTAINERS

Metal Parts Boxes

Metal Parts Boxes are prime cold rolled steel with baked gray enamel finish. The finish is rust and acid resistant. Each box comes with high impact plastic tray, positive pull down catch, and stick back parts labels for lid interiors.



8200M

CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L X W X D)	UOM	ORDER MUL.
8200M	Metal Parts Box	21	13-3/8" x 9-1/4" x 2"	EA	1
8220M	Metal Parts Box	24	18" x 12" x 3"	EA	1

Polypropylene Parts Boxes

This box is ideal for holding your different sized nuts and bolts along with your additional bits. It can be stored in a tool box as well.



8203C

CATALOG NO.	DESCRIPTION	NO. OF COMP.	DIMENSIONS (L X W X D)	UOM	ORDER MUL.
8201C	Polypropylene Parts Box - Translucent	13	11" x 6-3/4" x 1-1/4"	EA	1
8203C	Polypropylene Parts Box - Translucent	24	13-1/8" x 9" x 2-5/8"	EA	1

Satchel Style Case

Parts box made from rugged copolymer material with high impact translucent lid and handle on the side. 15 removable dividers allow up to 24 compartments.



8233

CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L X W X D)	UOM	ORDER MUL.
8233	Satchel Style Case	Up to 24	15" x 11-3/4" x 2-1/2"	EA	1

HVAC/R Tote

The hilmor HVAC/R Tote is your go-to tool storage and transport solution. It includes 27 exterior and interior pockets, 18 bands and clips for your keys so you can store your tools safely and find them quickly.

Features & Benefits

Keep Organized:
Rugged and Durable:
Secure Storage:

27 pockets and 18 bands. 14 exterior pockets and 13 interior pockets.
Designed to last with water-resistant bottom and reinforced rivets.
Stow your meter away safely in the padded pocket in the interior of the tote
Use the tape measure clip, key clip and tape holder loop to secure the rest of the items you need.
Helps with the Heavy Lifting: This tote has room for multiple tools and is tested up to 50 lbs. The padded shoulder strap makes carrying more comfortable.

Product Specifications

Extra Features: Key Clip; Tape Loop; Shoulder Strap

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	EXTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839078	HVAC/R Tote	13	14	7-1/2" x 7-1/2" x 13"	3.3 lbs.	EA	1



1839078

*Tools not included

hilmor

Backpack Tool Bag

The hilmor Backpack Tool Bag is your jobsite sidekick with 19 exterior and interior pockets. Its sturdy rubber, water-resistant bottom means rain or shine, the contents inside won't be damaged. And while it's spacious enough to hold up to 50 lbs., padded shoulder straps and a back air vent make hauling it a little more comfortable and leave your hands free to safely climb a ladder.

Features & Benefits

Secure Storage:

Stow your meter away safely in either of the two padded zipper pockets on the exterior sides of the tote.

Superior Versatility:

Hang your manifold from the bag's metal loop for easy transport to the jobsite.

Helps with the Heavy Lifting:

This bag has room for multiple tools and is tested up to 50 lbs. The padded shoulder straps and air vent back make carrying more comfortable.

Product Specifications

Extra Features: Clear Vinyl ID Window Pocket; Shoulder Strap; Double-Grip Handles; Steel "U" Ring; Airflow Ventilator Pads

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	EXTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839080	Backpack Tool Bag	11	8	6" x 14" x 16"	4.5 lbs.	EA	1



1839080

*Tools not included

hilmor

TOOLS STORAGE AND CASES | TOOLS

STORAGE CONTAINERS CONT'D

Tool Center Bag

The Hilmer Tool Center Bag is your total tool storage solution. It includes 24 exterior and interior pockets and three zippered pouches so you can store your tools safely and find them quickly.

Features & Benefits

- Keep Organized:** 24 pockets and three zippered pouches.
- Secure Storage:** Stow your meter away safely in either of the two padded pockets on the exterior sides of the tote.
- Helps with the Heavy Lifting:** This bag has room for multiple tools and is tested up to 50 lbs. The padded shoulder strap makes carrying more comfortable.
- Rugged and Durable:** Designed to last with a hard plastic, water-resistant bottom and a padded aluminum carrying handle.

Product Specifications

Extra Features: Clear Vinyl ID Window Pocket; Shoulder Strap; Cover Flap



1839079
*Tools not included

hilmer

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	EXTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839079	Tool Center Bag	13; 18 Tool Loops	11	13-1/2" x 8-1/2" x 9"	4.5 lbs.	EA	1

HVAC/R Refrigerant Tank & Utility Backpack

Give yourself a hand with the Utility Backpack. Comfortably carry refrigerant or recovery tanks, or up to 50 lbs. of whatever the job calls for.

Features & Benefits

- Superior Versatility:** Can carry up to 30-lb. refrigerant or recovery cylinders and serves as a knapsack to transport other materials to and from the jobsite.
- Secure Transport:** A drawstring with a cord lock and flap with latch securely hold your materials in place during transport.
- Stay Organized:** 8-carabiner loops, a see-through pocket to display OSHA refrigerant labels and a pocket keep you together.
- Helps with the Heavy Lifting:** Padded shoulder straps and back pads allow you to comfortably carry up to 50 lbs.
- Rugged and Durable:** Designed to last with heavy-duty nylon thread, and puncture and abrasion-resistant nylon fabric.

Product Specifications

Extra Features: External Pocket; See-Through Pocket; 8 Carabiner Loops



1891628
hilmer

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891628	HVAC/R Refrigerant Tank & Utility Backpack	20" x 12" x 12"	2.4 lbs.	EA	1

HVAC/R Carrying Strap

Let this Strap do some of your lifting. Clip on and carry refrigerant or recovery tanks comfortably and easily.

Features & Benefits

- Rugged and Durable:** Heavy-duty nylon fabric and slip-resistant padding helps prevent the strap from sliding.
- Less Wasted Time:** Steel carabiners easily clip to carry refrigerant or recovery cylinders and other essential materials to save trips and give you an extra arm.
- Helps with the Heavy Lifting:** Shoulder strap is designed and tested to hold up to 50 lbs.



1891625
hilmer

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891625	HVAC/R Carrying Strap	50-1/2" x 3-3/4" x 1/2"	14 oz.	EA	1

TOOLS | TOOLS STORAGE AND CASES

STORAGE CONTAINERS CONT'D

Zipper Pouch

The hilmor Zipper Pouch is your best bet for keeping track of all the small stuff on the jobsite – from small tools and accessories to receipts and other paperwork.

Features & Benefits

- Keep Organized:** The hilmor Zipper Pouch can conveniently fit many hilmor tools, including the Punch Swage Set or Dual Readout Thermometer with two Thermocouple Clamps.
- Rugged and Durable:** Designed with an inner liner to protect from water damage and a rivet on the outside so it can be clipped where it's needed.



1839081

hilmor

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839081	Zipper Pouch	1	10-1/2" x 1/8" x 7"	3 oz.	EA	1

HVAC/R General Purpose Gloves

No matter what the task, get a grip and protect your hands with these ruggedly reinforced gloves made to take on any job.

Features & Benefits

- Rugged and Durable:** Stands up to HVAC/R applications with a breathable-fabric design, featuring a reinforced thumb, palm and fingertips to increase life and durability.
- Extra Comfort:** A wrist strap easily adjusts for comfort while a form-fitting design provides fit and flexibility.



1891624

hilmor

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891606	HVAC/R General Purpose Gloves	Medium	9-3/4" x 4-3/8" x 1/2"	5 oz.	EA	1
1891607	HVAC/R General Purpose Gloves	Large	9-7/8" x 4-7/16" x 1/2"	5 oz.	EA	1
1891624	HVAC/R General Purpose Gloves	X-Large	10" x 4-5/8" x 1/2"	5 oz.	EA	1

HVAC/R Sheet Metal Gloves

No matter what the task, get a grip and protect your hands with these ruggedly reinforced gloves made to take on any job.

Features & Benefits

- Rugged and Durable:** Stands up to HVAC/R applications with a breathable-fabric design, featuring a reinforced thumb, palm and fingertips to increase life and durability.
- Extra Comfort:** A wrist strap easily adjusts for comfort while a form-fitting design provides fit and flexibility.



1891592

hilmor

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891463	HVAC/R Sheet Metal Gloves	Medium	9-3/4" x 4-3/8" x 1/2"	5 oz.	EA	1
1891469	HVAC/R Sheet Metal Gloves	Large	9-7/8" x 4-7/16" x 1/2"	5 oz.	EA	1
1891592	HVAC/R Sheet Metal Gloves	X-Large	10" x 4-5/8" x 1/2"	5 oz.	EA	1

TOOLS STORAGE AND CASES | TOOLS

STORAGE CONTAINERS CONT'D

HVAC/R Starter Kit

Get started on the right foot with a few of hilmor's most forward-thinking tools.

Product Specifications

Dual Readout Thermometer 1839106

hilmor's Dual Readout Thermometer is the industry's first to offer two digital readouts to help simplify the calculation of superheat and subcool.

2-Valve Aluminum Manifold 1839134

This ruggedly durable Aluminum Manifold features a forged aluminum body and high-impact gauge boots.

60" Hose Set of 3 1839153

Our hoses are bulked up with an extra abrasion-resistant layer and designed to work with the newest high-pressure refrigerants.

Quick-Engage Flare and Swage 1838947

Finally, a flaring tool that doesn't require a third arm. Two hands are all it takes to flare or swage in seconds.

Tri-Tube Bender 1839027

From start to final bend, the hilmor Tri-Tube Bender has you covered. Color-coded sizing makes it simple to bend 1/4", 3/8" and 1/2" tubes.

Service Wrenches 1839042, 1839046

Smart features that save your knuckles and your time. Plus, a Hex Key Adapter for liquid-and suction-based valves.

Folding Hex Key Set 1839048

Get full socket contact with our slip-resistant Folding Hex Key Set. Sizes include 5/64" to 1/4".

Inspection Mirror 1839051

Leaks can't hide anymore. With a handle that extends from 7-3/4" to 21-1/2", this telescoping mirror goes above and beyond.

3" Quick-Change Magnetic Nut Driver 1839054

Don't get driven nuts. Just drive them. This Nut Driver lets you quickly switch between 1/4" and 5/16", the two most common sizes.

9 in 1 Multi-Tool 1839053

Tackle any on-the-job challenge with square, hex and Phillips bits. Not to mention a handy valve core remover.

Backpack Tool Bag 1839080

The hilmor Backpack Tool Bag includes 19 exterior and interior pockets. Plus, its sturdy, water-resistant bottom holds up in any climate.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890995	HVAC/R Starter Kit	20" x 15-1/4" x 16-1/2"	21.7 lbs.	EA	1

TOOLS | CONDENSOR AND COIL CLEANING TOOLS

SPRAYERS

Compression Sprayers

Acid impervious poly design with a 36" (91cm) reinforced hose, shut-off with lock-on feature for continuous spraying, a 2-piece nozzle that's detachable for easy clean up and fits directly to the shut-off or extension wand. The Hand-Held Sprayer has a 48 oz. (1.4 l) capacity, perfect for small areas. All sprayers have a full 5 year warranty.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
1002	Hand Held Sprayer	EA	1
2601	1 Gallon Wand Sprayer	EA	1
2602	1 Gallon Wand Sprayer	EA	1
2603	1 Gallon Wand Sprayer	EA	1

Hot Water Hose

High burst strength. 500 PSI. Withstands hot water up to 160°F. EPDM tube. Heavy duty solid brass couplings.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-HW5850	5/8" x 50' Hot Water Hose	EA	5

Pistol Grips & Water Nozzle

Pistol Grip – 540-572 Insulated: For spraying hot or cold water. Heavy-duty, self adjusting "duck" packing for lifetime proof seal.

Water Nozzle – 540-573 Un-insulated: Heavy-duty and holds open clip for continuous spraying. Self-adjusting "duck" for leak proof seal.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-572	Insulated Pistol Grip	EA	12
540-573	Uninsulated Water Nozzle	EA	12

CoilShot® Condenser Coil-Cleaning Tool

Tablet-based system saves wasted coil cleaner and space over bulky coil cleaner bottles. One pack of tablets replaces an entire case of coil cleaner. Use with CoilShot wand for best results - to help get behind coils for superior cleaning every time. CoilShot attaches to a standard garden hose, uses pre-measured tablets and switches from foaming cleaner to water with easy mixing valve. 2 tables equals 1 gallon of cleaner.

Product Specifications

Output Pressure	Up to 70 PSI
Output Flow	Up to 3 GPM
Water Source	External
Dimensions	10" x 2.25" x 8"
Weight (Dry)	1 Lbs.
Warranty	90 Days



SC-CS-100



*Shown with Optional Wand SC-CS-Wand



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CS-100	CoilShot® Condenser Coil Cleaning Tool	EA	1

Dial-a-Mix Sprayer

Save time and money by dialing in the exact mix ratio to properly clean the coil. This sprayer features 5 mix ratios (1:3, 1:4, 1:6, 1:9, 1:10), a 1/2 gallon capacity bottle and a quick disconnect for fast and easy rinsing.



540-GUN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-GUN	Dial-a-Mix Sprayer	EA	6

All Purpose Sprayers

Lightweight, versatile gallon size bottle has a 28" flexible hose and easy-to-carry handle. Best for big jobs in hard-to-reach places. Adjustable nozzle will atomize any low viscosity liquid. Adjusts from a mist to a 12' jet stream or anything in between. One pint container has a measured ounce guide. Ideal for water-based chemicals.



BS-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BS-32	Quart Size Sprayer	EA	12

Garden Hose

High quality product priced for high volume sales. Soft-Flex formulation makes the 5 ply Hose easy to handle. Withstands 500 psi water pressure. Heavy duty solid brass couplings and collar. Full Lifetime Guarantee!



5-IG5850

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-IG5850	Green Flexon 5-Ply Forever Garden Hose	EA	5

CoilJet® CJ-200E

CoilJet is the perfect way to effectively clean rooftop units, evaporators, condenser coils and refrigeration coils. With 220 psi and a continuous water supply, it offers a lot of power to clean thicker, dirtier coils without damaging fins. CoilJet has an integrated water and chemical tank, on-board gun and power cord storage, convenient strap, and standard hose connector for the ultimate convenience in coil cleaning.



CJ-200E



Product Specifications

Output Pressure	220 PSI (15.1 BAR)
Output Flow	0.5 GPM
Capacity (Water)	3.375 Gallons
Capacity (Chemicals)	0.4375 Gallons
Chemical Ratio Range	30:1 - 4:1
Water Source	Onboard or External
Pump Type	Diaphragm
Motor	0.2 HP
Input Power	115V, 60 Hz, 1.5A
Power Cord Length	15 Ft.
Dimensions	18" x 10" x 19"
Weight (Dry)	20 Lbs.
Weight (Full)	55 Lbs.
Warranty	1 Year

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-200E	CoilJet® Coil Cleaner	EA	1

CONDENSOR AND COIL CLEANING TOOLS | TOOLS

SPRAYERS CONT'D

CoilJet® CJ-125

When water and power may be inaccessible, such as rooftops and attics, the CoilJet CJ-125 portable coil cleaner is ideal. CJ-125 includes integrated water, chemical tanks, and a long-life rechargeable battery. Includes 2 standard spray nozzles, spray gun with quick connect, smart charger, rechargeable battery, shoulder strap and optional spray wands.

Product Specifications

Output Pressure	125 PSI (8.5 BAR)
Output Flow	0.7 GPM
Capacity (Water)	3.375 Gallons
Capacity (Chemicals)	0.4375 Gallons
Chemical Ratio Range	30:1 - 4:1
Water Source	Onboard
Pump Type	Diaphragm
Motor	0.2 HP
Input Power	12V, 60 Hz, 1.5A
Power Cord Length	15 Ft.
Dimensions	18" x 10" x 19"
Weight (Dry)	20 Lbs.
Weight (Full)	55 Lbs.
Warranty	1 Year



CJ-125

*Shown with optional accessories



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-125	CoilJet® Coil Cleaner	EA	1

FlowJet™

FlowJet provides high flow cleaning with chemical injection, allowing you to make quick work of cleaning debris and grime from thick condenser and evaporator coils. Powerful 400 PSI at 2.5 gpm washes even the dirtiest coils with a continuous spray of water and cleaning chemical – without damaging sensitive fins. Professional results from compact, portable solution. Includes: FlowJet, 2 standard spray nozzles, 12' hose, 25' power cord with GFCI protection, spray gun, and 18" lance assembly. Optional 90° spray nozzle forces dirt and debris back in the direction it entered.

Product Specifications

Output Pressure	400 PSI (27.2 BAR)	Soap Siphon Dilution Ratio	10:1
Output Flow	2.2 GPM	Pump Type	Axial
Water Source	External 2.5 GPM	Motor	.75 HP
Max. Inlet Water Pressure	100 PSI (6.8 BAR)	Input Power	115V, 60 Hz, 12.5A
Max. Inlet Water Temperature	125°F (52°C)	Power Cord Length	25'
Max. Ambient Operational Temperature	104°F (40°C)	Plug Type	14-3 GFCI
		Dimensions	30" x 12" x 13"
		Weight (Dry)	35 Lbs.
		Warranty	1 Year



FLOWJET-60



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FLOWJET-60	FlowJet™ Coil Cleaner	EA	1

Condenser Needle

Blast dirt and debris from condenser coils, without damaging delicate fins, using Condenser Needle. Designed to clean from the backside of the coil, Condenser Needle reaches inside units with its swivel handle and quickly cleans the entire coil bed. Attach it to a standard garden hose and use the 36" wand to easily clean most types of units. Exclusive spray tip delivers 90 degrees spray pattern up to 3+ gallons per minute.

Product Specifications

Output Pressure	100 PSI (6.9 BAR)
Output Flow	3.3 GPM
Water Source	External
Max. Inlet Water Pressure	100 PSI (6.8 BAR)
Chemical Ratios	0 - 16:1
Spray Wand Length	36"
Spray Wand Tip	90"
Dimensions	48" x 3" x 3"
Weight (Dry)	5 Lbs.
Warranty	1 Year



CN-03



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CN-03	Condenser Needle	EA	1

TOOLS | CONDENSOR AND COIL CLEANING TOOLS

SPRAYERS CONT'D

Dry Steam Coil and Surface Cleaner

The SC-VSC-7000 steam cleaner is your answer to cleaning dirty, greasy coils and other surfaces without harsh, damaging chemicals. It works excellent on air handlers, mini-splits, condensers, exhaust vents, oily commercial kitchen ducts and more. The power of steam combined with 65 psi pressure goes deep into coils, cracks, and crevices, lifting and removing stubborn dirt and soils. The small and portable unit is lightweight and comes complete with a hose and full accessory kit to clean even the toughest to reach areas. It sanitizes surfaces killing bacteria, fungus, mold, mildew and other microorganisms on contact leaving coils and other surfaces clean and sparkling! With it's easy-to-fill tank, quality stainless steel boiler, strong 1500 Watt power and full accessory kit, it offers the complete solution for cleaning heavily soiled commercial equipment.

Product Specifications

Steam Flow Regulation	Manual
Output Pressure	65 PSI (4.5 BAR)
Steam Production	0.43 Gallon/Hr
Boiler Capacity	0.7 Gallons
Max. Temperature @ Nozzle	235°F (113°C)
Steam Hose Length	10 Ft.
Input Power	115V, 13.5 Amps, 60 Hz, 1550 Watts
Power Cord Length	13 Ft.
Dimensions	13" x 13" x 19"
Weight	15.6 Lbs. (Dry)
Warranty	1 Year



SC-VSC-7000



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-VSC-7000	Dry Steam Coil and Surface Cleaner	EA	1

BucketDescaler®

Eliminate limescale and other deposits from water passages in just minutes. The BucketDescaler features a durable acid-proof pump and fittings, extra-long hoses, and optional re-circulation valve kit. Perfect for tankless and tanked water heaters and other small heat exchangers. Features 6' inlet and outlet hoses and purge valve to reduce cleanup time.

Product Specifications

Inlet Hose Length	6 Ft.	Motor	.17 HP
Outlet Hose Length	6 Ft.	Input Power	115V, 60 Hz, 1A
Output Flow	3.0 GPM	Power Cord Length	12 Ft.
Capacity	4 Gallons	Dimensions	19" x 14"
Maximum Head	69 Ft.	Weight (Dry)	11 Lbs.
Temperature Range	0°F - 130°F (54°C)	Warranty	1 Year
Pump Type	Diaphragm		



SC-DS-5



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-DS-5	BucketDescaler®	EA	1

MINI-SPLIT BIBS

Mini-Split Bib Kit 360

The Mini-Split Bib Kit 360 is the most complete way to clean ductless mini-split coils, blower wheels and more. This kit allows you to safely and quickly clean virtually any mini-split system the correct way using pressurized water on coils, blower wheels and more. The patented technology keeps water away from walls, ceilings and other surroundings and directs it into the 5-gallon bucket for disposal, so it's clean and safe all around. Mini-Split Bib Kit 360 protects the walls, ceilings and surroundings from water and overspray. Quick set up and easy to move from job-to-job. Reusable bib system is a lower cost per use. Includes 8-foot drain line for high mounts.

Product Specifications

Fits Duct Fan Units	Up to 44" Wide
Drain Line Length	8 Ft.
Bib Material Thickness	4 Mil
Dimensions	36" x 16"
Weight	1.5 Lbs.



MSB-360-KIT



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSB-360-KIT	Mini-Split Bib Kit 360	EA	1

CONDENSOR AND COIL CLEANING TOOLS | TOOLS

MINI-SPLIT BIBS CONT'D

Mini-Split Bib Kit

Quickly and safely clean virtually any mini-split system (30" to 44") the correct way, by using pressurized water on coils and fans. This patented technology keeps water away from walls and other surroundings while directing it into the 5-gallon bucket for disposal. Easy to set up and move from job to job. Includes 8' drain line for high mounted evaporators.

Product Specifications

Fits Duct Fan Units	Up to 44" Wide
Drain Line Length	8 Ft.
Bib Material Thickness	4 Mil
Dimensions	36" x 16"
Weight	1.5 Lbs.



MSB-KIT



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSB-KIT	Mini-Split Bib Kit	EA	1

Mini-Split Bib Kit, Extra Large

Extra-large bib kit fits virtually any commercial brand ductless fan unit 45" to 60" wide. Complete kit includes: bib, adjustable mounting brackets, 1 roll of protective tape, 2 deflector plates (XL Kit includes 3) and 5 gallon bucket.

Product Specifications

Fits Duct Fan Units	44" - 66" Wide
Drain Line Length	8 Ft.
Bib Material Thickness	4 Mil
Dimensions	52" x 16"
Weight	1.5 Lbs.



MSB-KIT-XL



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSB-KIT-XL	Mini-Split Bib Kit, Extra Large	EA	1

Mini-Split Cassette Bib Kit

Cleaning ductless ceiling cassettes is a daunting task, but we've just made it a whole lot easier. Using pressurized water and coil cleaner is the key to a good coil cleaning. Our ductless cassette bib kit installs in seconds and quickly creates a funnel where all your water and cleaner is safely deposited into a bucket. Super easy to use and incredibly effective. Features six access points to clean coils. Complete kit includes: cassette bib, adjustable bungee cord, 10' drain line, mounting hooks and a five gallon bucket. Optional stand available.

Product Specifications

Fits Duct Fan Units	Up to 48" Wide
Drain Line Length	10 Ft.
Bib Material Thickness	4 Mil
Dimensions	48" x 48"
Weight	1.1 Lbs.

Optional Equipment

Cassette Bib Stand	SC-CB-STAND
Carrying Bag	CSB-010



SC-CB




CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CB	Mini-Split Cassette Bib Kit	EA	1

SPRAYER ACCESSORIES

Mini-Split Cassette Bib Stand

Expand your reach! The portable Cassette Bib Stand keeps your bib in place when cleaning high ceilings.



SC-CB-STAND



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CB-STAND	Cassette Bib Stand	EA	1

BucketDescaler® Recirculation Valve Kit

Increase descaling power for larger water heaters.



SC-DS-5-VLV-KIT



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-DS-5-VLV-KIT	Recirculation Valve Kit	EA	1

Mini-Split Cassette Bib Carrying Bag

Make carrying your Bib Stand easier, in this durable canvas bag.



CSB-010



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CSB-010	Carrying Bag	EA	1

BucketDescaler® 6' Extension Hoses



SC-DS-5-EXTHOSE



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-DS-5-EXTHOSE	Extension Hoses - 6'	EA	1

TOOLS | CONDENSOR AND COIL CLEANING TOOLS

SPRAYER ACCESSORIES CONT'D

CoilShot® Condenser Coil-Cleaning Wand

3 ft. wand is specially designed to quickly connect to CoilShot cleaning tool. 90° nozzle creates powerful cleaning spray to clean coils from the inside out. The wand features a slim profile that fits between the grate, so you don't have to remove the top fan and housing. The Wand features a quick connect fitting, heavy-duty aluminum wand, a unique wand tip to backflush coils, and a swivel handle that easily adjusts direction of water jet.




CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CS-WAND	CoilShot® Condenser Coil Cleaning Wand	EA	1

FlowJet® 36" Two Piece Extendable Wand with 90° Spray Tip



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-WWSS-HF	Two Piece Wand, Extendable, 36" with 90° Spray Tip	EA	1

CoilJet® 90° Spray Wand



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-WWSS	3 ft Sectional Stainless Steel 90° Spray Wand	EA	1
CJ-WWSS-EXT	16" Extension for CJ-WWSS	EA	1

CoilJet® Battery Chargers



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ2-24	Battery Charger, Plug into Unit for CJ-125	EA	1
CJ2-25	Battery Charger with Lugs to Charge CJ-125 Battery Outside of Unit	EA	1

CoilShot® Cleaning Tablets

The revolutionary CoilShot® Cleaning Tablets are designed to offer fast and easy cleaning of residential and commercial single-pass HVAC coils without the strain and bulkiness of using liquid coil cleaners. Each tablet is equal to approximately one half gallon of coil cleaner. CoilShot Cleaning Tablets are safe for all coils, are plant friendly, non-acidic and non-caustic.



SC-CS-TABS



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CS-TABS	CoilShot® Cleaning Tablets, 8 per box	PK	1

CoilJet® 90° Spray Wand



8945-24



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8945-24	90° Spray Wand, 24"	EA	1
8945	90° Spray Wand, 36"	EA	1
8945-48	90° Spray Wand, 48"	EA	1
8945-60	90° Spray Wand, 60"	EA	1

CoilJet® Spray Flex Wand



8945-FLEX-24



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8945-0-DEG-FW12	0° Spray Wand 12"	EA	1
8945-0-DEG-FLEX	0° Spray Wand 24"	EA	1
8945-FLEX-24	90° Spray Wand 24"	EA	1

CoilJet® Quick Disconnect Adapters



CJ-QDN-45



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-QDN-45	45° Quick Disconnect Adapter	EA	1
CJ-QDN-90	90° Quick Disconnect Adapter	EA	1

CONDENSOR AND COIL CLEANING TOOLS / HAND TOOLS | TOOLS

SPRAYER ACCESSORIES CONT'D

CoilJet® Foaming Nozzle



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-9619	Foaming Nozzle Assembly	EA	1

CoilJet® Mini-Split Accessory Kit



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-MSB-ACC-KIT	CoilJet Mini-Split Accessory Kit	EA	1

CoilJet® Vehicle Adapter



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8944	Vehicle Adapter for Battery Charger	EA	1

CoilJet® Extension Lance



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-9656	Extension Lance Assembly 24"	EA	1
CJ-9657	Extension Lance Assembly 36"	EA	1
CJ-9658	Extension Lance Assembly 48"	EA	1
CJ-9659	Extension Lance Assembly 60"	EA	1

Replacement Nozzles



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-QDN-0004R	0° Pinpoint Replacement Nozzle for CJ-125	EA	1
CJ-QDN-1504Y	15° Replacement Nozzle for CJ-125	EA	1
CJ-QDN-2508G	25° Replacement Nozzle for CJ-200E (green)	EA	1
CJ-QDN-15025Y	15° Replacement Nozzle for CJ-200E (yellow)	EA	1

CoilJet® Battery



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-9613	12V Replacement Deep Cycle Lead Acid Battery for CJ-125	EA	1

HEX KEYS

Hex Key Sets

Hex head screws have nowhere to hide. hilmor Hex Key Sets have standard and metric sizes covered. They're slip-resistant so you never lose your grip and always keep your cool.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839049	Ball End Hex Key Set Inch	.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8"	7-1/4" x 2-3/4" x 3/4"	13 oz.	EA	1
1937816	Ball End Hex Key Set Metric	1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm	7" x 2-1/2" x 3/4"	12 oz.	EA	1



Hex Key Sets

You don't fold on the job. Luckily, this set does for easy, convenient storage. Available in inch and metric.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839048	Folding Hex Key Set Inch	5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"	4-1/4" x 7/8" x 1-5/8"	5 oz.	EA	1
1891472	Folding Hex Key Set Metric	1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm	4-1/4" x 7/8" x 1-5/8"	5 oz.	EA	1



TOOLS | HAND TOOLS

HEX KEYS CONT'D

T-Handle Hex Key Set

T for toughness. The hilmor T-Handle Hex Key Set features hardened, nickel chrome-plated shafts, yet ergonomic handles make sure this tool isn't too tough on your hands.

Features & Benefits

- Rugged and Durable:** Hardened, nickel chrome-plated shafts increase life and durability.
- Comfortable Grip:** Ergonomic molded handles reduce hand fatigue and won't slip or twist.
- Quick Identification:** Easy-to-read size markings make identification simple.
- Added Versatility:** A 6" shaft works well in tight spaces, while the 1/2" shaft gives you more leverage.



CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891471	T-Handle Hex Key Set Inch	3/32", 5/32", 7/64", 3/16", 1/8", 7/32, 9/64", 1/4", 5/16", 3/8"	8-3/4" x 7-3/4" x 5-3/8"	2.8 lbs.	EA	1
1937817	T-Handle Hex Key Set Metric	2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm	8" x 6-3/4" x 5-1/4"	2.2 lbs.	EA	1

MULTITOOLS

Pocket 4-in-1 Mini Screwdriver

This screwdriver set is ideal for technicians, hobbyists, and do it yourselfers. There are 2 double-ended vanadium blades. You can change blades instantly and the blades are held in the carrier handled. The dimensions are 1/16 in. and 1/8 in. slotted tips and #1 and #00 cross point. The Mini Screwdriver comes in with a convenient pocket clip and capped ends.



6-T744

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-T744	Pocket 4-in-1 Mini Screwdriver - Length: 5-1/8" (130mm)	EA	1

Ratcheting 9 in 1 Multi-Tool

A simple twist of the hand can drive a screw, nut or bolt in no time. Nine different bits are at your disposal. A ratcheting mechanism and an ergonomic rubber grip comes standard.



1891259



Features & Benefits

- Rugged and Durable:** Designed with a high-torque ratcheting mechanism and thick shaft walls for long life and less stripping.
- More Torque:** A slip-resistant grip allows for maximum leverage.
- Simple Setup:** Easily change between forward, reverse and locked positions.

Product Specifications

Bit Sizes: #1 & #2 Phillips, 3/16" & 1/4" Slotted, #2 Square, 1/4", 5/16", and 3/8" Nut Drivers, and Valve Core Remover.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891259	Ratcheting 9 in 1 Multi-Tool	8-1/2" x 1-1/4" x 1-1/4"	12 oz.	EA	1

Combination Screwdrivers

Multiple bits in one handy screwdriver. No need for a toolbox for those quick jobs. Lifetime guarantee.



5-61

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-41	4-in-1 with #1 and #2 Phillips, 3/16" and 5/16" Slotted	EA	12
5-61	6-in-1 with #1 and #2 Phillips, 3/16" and 5/16" Slotted 1/4" Nut Driver, and 5/16" Nut Driver	EA	12

9 in 1 Multi-Tool

When you've got a lot of jobs but not a lot of time, the 9 in 1 Multi-Tool from hilmor can save the day. It features a slip-resistant grip for more torque and a thick-walled shaft for more durability.



1937819

1839053



Features & Benefits

- Rugged and Durable:** Designed with thick shaft walls for long life and less stripping.
- More Torque:** A slip-resistant grip allows for maximum leverage.

Product Specifications

Bit Sizes: #1 & #2 Phillips, 3/16" & 1/4" Slotted, #2 Square, 1/4", 5/16", and 3/8" Nut Drivers, and Valve Core Remover.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839053	3" 9 in 1 Multi-Tool	7-1/4" x 1-1/3" x 1-1/4"	7 oz.	EA	1
1937819	6" 9 in 1 Multi-Tool	10-1/2" x 1-1/8" x 1-1/8"	10 oz.	EA	1

HAND TOOLS | TOOLS

MULTITOOLS CONT'D

6 in 1 Stubby Multi-Tool

Small spaces come standard in HVAC/R. That's why you need the hilmor 6 in 1 Stubby Multi-Tool. Its compact design fits right in, giving you the necessary torque to tighten or loosen a screw or nut.



1891351
hilmor

Features & Benefits

- Small Space Capable:** A compact design allows for use in tight spaces.
- More Torque:** A slip-resistant grip allows for maximum leverage.
- Simple Setup:** Easily change between six different drivers – 3/16" and 1/4" Slotted, #1 and #2 Phillips, 1/4" and 5/16" Nut Drivers.

Product Specifications

Bit Sizes: 3/16" and 1/4" Slotted, #1 and #2 Phillips, 1/4" and 5/16" Nut Drivers.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891351	6 in 1 Stubby Multi-Tool	4-7/8" x 1-1/4" x 1-1/4"	3 oz.	EA	1

Fast Connect Bit Extension

Built for serious impact. And impact drivers. The hilmor Fast Connect Bit Extension gives you more versatility and maximum durability. All it takes is one hand to quickly release the bit and move on to the next job.



1937919
hilmor

Features & Benefits

- Impact Compatible:** Extension is specially manufactured for use with impact drivers.
- 1/4" Shank:** Jaw design is compatible with all 1/4" hex shank accessories, including insert bits, while the 1/4" Fast Connect shank is designed for use in impact drivers and rotary drills.
- Protection:** A black oxide coating resists corrosion.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937919	Fast Connect Bit Extension	2-1/4" x 3/4" x 3/4"	2 oz.	EA	1

Impact Fastener Bits

Small but mighty. hilmor Impact Fastener Bits are built to stand the test of time. They fit right in with the aggressive nature of impact drivers. Heavy-duty, high-grade steel will withstand extremely high torque output.

Features & Benefits


- Impact Compatible:** Bits are specially manufactured for use with impact drivers.
- Rugged and Durable:** Bits are built to last, manufactured from high-grade steel and coated with black oxide to resist corrosion.
- Secure Fit:** Precision tip geometry allows for a better fit and reduced stripping.
- 1/4" Shank:** The 1/4" quick-change shank is designed for use in impact drivers and rotary drills.



1937913



1937914




1937915



1937916



1937917



1937918



CATALOG NO.	DESCRIPTION	BIT SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937913	Impact Fastener Bit	#1 Phillips	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937914	Impact Fastener Bit	#2 Phillips	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937915	Impact Fastener Bit	#1 Square Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937916	Impact Fastener Bit	#2 Square Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937917	Impact Fastener Bit	4-5 Slotted Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937918	Impact Fastener Bit	6-8 Slotted Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1

NUT DRIVERS

Magnetic Hex Chucks

Magnetic Hex Chucks may be used with an electric drill to drive hex head screws.



DE15

CATALOG NO.	DESCRIPTION	SIZE	DIA	LENGTH	UOM	ORDER MUL.
DE13	Magnetic Hex Chuck	1/4"	7/16"	1-3/4"	EA	1
DE14	Magnetic Hex Chuck	5/16"	1/2"	1-3/4"	EA	1
DE15	Magnetic Hex Chuck	3/8"	9/16"	1-7/8"	EA	1
DE23	Magnetic Hex Chuck	1/4"	7/16"	2-9/16"	EA	1
DE24	Magnetic Hex Chuck	5/16"	1/2"	2-9/16"	EA	1
DE33**	Magnetic Hex Chuck	1/4"	7/16"	3"	EA	1

**Magnetic insert bit holder with a "C" ring retainer

TOOLS | HAND TOOLS

NUT DRIVERS CONT'D

Reversible Magnetic Nut Drivers

The hilmor Reversible Magnetic Nut Drivers incorporate a high performance socket design that drives the fastener from the flats, not the corners, minimizing slippage. Making it the most fun you can have without stripping!

Features & Benefits

Reduced Stripping: High performance socket design drives the fastener from the flats, not the corners, minimizing slippage.

Tapered Design: Tapered socket design for improved access in tight spaces.



CATALOG NO.	DESCRIPTION	SIZE	WEIGHT	UOM	ORDER MUL.
1937881	3 Pack Reversible Magnetic Hex Driver w/flippable 1/4" x 5/16" Socket (Impact Rated)	2-3/4"	0.1 lbs.	EA	1
1937882	3 Pack Reversible Magnetic Hex Driver w/flippable 1/4" x 5/16" Socket (Impact Rated)	4"	0.2 lbs.	EA	1
1937883	3 Pack Reversible Magnetic Hex Driver w/flippable 1/4" x 5/16" Socket (Impact Rated)	6"	0.22 lbs.	EA	1
1937887	Reversible Magnetic Hex Driver w/Flippable 1/4" x 5/16" Socket (Impact Rated)	2-3/4"	0.1 lbs.	EA	30
1937888	Reversible Magnetic Hex Driver w/Flippable 1/4" x 5/16" Socket (Impact Rated)	4"	0.2 lbs.	EA	30
1937889	Reversible Magnetic Hex Driver w/Flippable 1/4" x 5/16" Socket (Impact Rated)	6"	0.22 lbs.	EA	30

Fast Connect Magnetic Nut Driver Set

The nut driver has evolved. The set features a 3" and 6" hilmor Fast Connect Magnetic Nut Driver. The name alone says it all. They're lightning fast and allow for one-handed quick release for fast and easy bit changes.

Features & Benefits

Simple Setup: A quick-change mechanism allows for easy change-out of standard bits with 1/4" hex shank.

Added Versatility: Set includes both stubby and 4" handles, ensuring you have the right size tool for the job.

Secure Hold: A rare-earth magnet helps maintain a secure hold to keep fasteners firmly in place.

Reduced Stripping: Designed to drive fasteners on the side instead of on the corners, reducing breakage and stripping.

Quick Identification: A color-coded band makes size identification simple.

Convenient Storage: Soft storage pouch with additional bit storage keeps everything organized.

Product Specifications

Kit Contents: 2-1/2" Fast Connect Bit Extension for 1/4", 1-7/8" Magnetic Nutsetters for 1/4", 5/16", 3/8", #1 x 2" Phillips Impact Bit, #2 x 2" Phillips Impact Bit, #1 x 2" Square Impact Bit, #2 x 2" Square Impact Bit, 4-5 x 2" Slotted Impact Bit, 6-8 x 2" Slotted Impact Bit



CATALOG NO.	DESCRIPTION	DIMENSIONS	WEIGHT	UOM	ORDER MUL.
1937911	Fast Connect Magnetic Nut Driver Set	4" x 4" x 1-3/4"	11 oz.	EA	1

Magnetic Nutsetters

Choose a size. Lock in your bit. And get right to it. The hilmor Magnetic Nutsetters can do work in seconds flat. They feature magnetic tips and a lobular design to grab any bit.

Features & Benefits

Secure Hold: A rare-earth magnet helps maintain a secure hold to keep fasteners firmly in place.

Impact Compatible: Bits are specially manufactured for use with impact drivers.

Quick ID: A color-coded band makes size identification simple.

Reduced Stopping: Designed to drive fasteners on the side instead of on the corners, reducing breakage and stripping.

1/4" Shank: The 1/4" quick-change shank is designed for use in impact drivers and rotary drills.

Rugged and Durable: Bits are built to last, manufactured from cold-forged, high-grade steel and coated with black oxide to resist corrosion.



CATALOG NO.	DESCRIPTION	SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937872	Magnetic Nutsetter	1/4"	6" x 3/8" x 3/8"	2 oz.	EA	1
1937873	Magnetic Nutsetter	5/16"	6" x 5/16" x 5/16"	2 oz.	EA	1
1937874	Magnetic Nutsetter	3/8"	6" x 1/2" x 1/2"	3 oz.	EA	1
1885435	Magnetic Nutsetter	1/4" - Set of 3	1-7/8" x 3/8" x 3/8"	2 oz.	EA	1
1885436	Magnetic Nutsetter	5/16" - Set of 3	1-7/8" x 5/16" x 5/16"	3 oz.	EA	1
1885437	Magnetic Nutsetter	3/8" - Set of 3	1-7/8" x 1/2" x 1/2"	3 oz.	EA	1
1937871	Magnetic Nutsetter	1/4", 5/16", 3/8"	1-7/8" x NA x NA	3 oz.	EA	1
1937875	Magnetic Nutsetter	1/4", 5/16", 3/8"	6" x NA x NA	2 oz.	EA	1

NUT DRIVERS CONT'D

Fast Connect Screwdriver Bit Set

Fumbling around with bits is a waste of time. The hilmor Fast Connect Screwdriver Bit Set is definitely not. The set features the Fast Connect Bit Extension that's impact driver ready. Quickly swap out bit sizes in seconds flat.

Features & Benefits

- Impact Compatible:** Extension and bits are specially manufactured for use with impact drivers.
- 1/4" Shank:** The 1/4" quick-change shank is designed for use in impact drivers and rotary drills.
- Secure Fit:** Precision tip geometry allows for a better fit and reduced stripping.
- Secure Hold:** A rare-earth magnet helps maintain a secure hold to keep fasteners firmly in place.
- Reduced Stripping:** Designed to drive fasteners on the side instead of on the corners, reducing breakage and stripping.
- Convenient Storage:** Compact kit box included for quick and easy storage.



Product Specifications

Kit Contents: 2-1/2" Fast Connect Bit Extension for 1/4", 1-7/8" Magnetic Nutsetters for 1/4", 5/16", 3/8", #1 x 2" Phillips Impact Bit, #2 x 2" Phillips Impact Bit, #1 x 2" Square Impact Bit, #2 x 2" Square Impact Bit, 4-5 x 2" Slotted Impact Bit, 6-8 x 2" Slotted Impact Bit

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937912	Fast Connect Screwdriver Bit Set	4" x 4" x 1-3/4"	11 oz.	EA	1

Magnetic Nut Drivers

All sizes to conquer jobs big and small. The hilmor Magnetic Nut Drivers give you a secure hold when and where you need it.

Features & Benefits

- Secure Hold:** A magnetic tip keeps fasteners firmly in place.
- Quick Identification:** A color-coded insert makes size identification simple.
- More Torque:** A slip-resistant grip and wrench flats allow for maximum leverage. Wrench flat items 1839076 and 18839077 only.
- Big Bolt Capable:** A hollowed shaft allows for use on long bolts.
- Rugged and Durable:** Designed to last with a durable chrome-vanadium steel construction.



CATALOG NO.	DESCRIPTION	SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839055	1-1/2" Magnetic Nut Driver	1/4"	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1839056	1-1/2" Magnetic Nut Driver	5/16"	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1839057	1-1/2" Magnetic Nut Driver	Set of 2 - 1/4" & 5/16"	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1839059	3" Magnetic Nut Drivers	1/4"	6-7/8" x 1-1/4" x 1-1/4"	3 oz.	EA	1
1839060	3" Magnetic Nut Drivers	5/16"	6-7/8" x 1-1/4" x 1-1/4"	3 oz.	EA	1
1839063	3" Magnetic Nut Drivers	7/16"	7-1/4" x 1-3/8" x 1-3/8"	6 oz.	EA	1
1839065	3" Magnetic Nut Drivers	Set of 7	6-7/8" x 1-1/4" x 1-1/4" 7-1/4" x 1-3/8" x 1-3/8"	1.7 lbs.	EA	1
1839066	3" Magnetic Nut Drivers	Set of 2 - 1/4" & 5/16"	6-7/8" x 1-1/4" x 1-1/4"	6 oz.	EA	1
1839076	18" Magnetic Nut Drivers	1/4"	22" x 1-1/4"	6 oz.	EA	1
1839077	18" Magnetic Nut Drivers	5/16"	22" x 1-1/4"	6 oz.	EA	1

TOOLS | HAND TOOLS

NUT DRIVERS CONT'D

Quick-Change Magnetic Nut Drivers

It's as if 1/4" to 5/16" had an HVAC/R baby. The hilmar Quick-Change Magnetic Nut Driver is two tools in one, so you can switch from 1/4" to 5/16" with ease. A color-coded handle makes for quick identification. A magnetic tip keeps fasteners firmly in place.

Features & Benefits

- Secure Hold:** A magnetic tip on both ends keeps fasteners firmly in place.
- Added Versatility:** Quickly switch between 1/4" and 5/16", the two most common sizes.
- Quick Identification:** A color-coded insert on the bands and bottom makes size identification simple.
- Big Bolt Capable:** A hollowed shaft allows for use on long bolts.
- Rugged and Durable:** Designed to last with a durable chrome-vanadium steel construction.



CATALOG NO.	DESCRIPTION	SIZES	SHAFT LENGTH	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937818	Quick-Change Magnetic Nut Drivers	1/4", 5/16"	1-1/4"	3-1/4" x 1-1/4" x 1-1/4"	3 oz.	EA	1
1839054	Quick-Change Magnetic Nut Drivers	1/4", 5/16"	3"	7-1/2" x 1-1/3" x 1-1/3"	6 oz.	EA	1
1891260	Quick-Change Magnetic Nut Drivers	1/4", 5/16"	6"	10-3/8" x 1-1/3" x 1-1/3"	6 oz.	EA	1

SCREWDRIVERS

Keystone Tip Demolition Screwdrivers

It's a screwdriver on steroids. Pounding, prying, chiseling – no problem. A metal strike cap and through shaft can handle just about everything you put in front of it.

Features & Benefits

- Rugged and Durable:** Designed to last with a heat-treated, chrome-plated through shaft and metal strike cap.
- More Torque:** A slip-resistant grip allows for maximum leverage.
- Secure Fit:** A machined tip allows for a better fit.



CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/ SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891395	Keystone Tip Demolition Screwdriver	4"	1/4"	8" x 1" x 1"	6 oz.	EA	1
1891396	Keystone Tip Demolition Screwdriver	7"	5/16"	11-1/8" x 1-1/8" x 1-1/8"	6 oz.	EA	1

Keystone Tip and Cabinet Tip Screwdrivers

Driven to perform. Everything about these screwdrivers says get work done. They're designed to last with a heat-treated, chrome-plated shaft, yet they wouldn't dare strip out your screws.

Features & Benefits

- More Torque:** A slip-resistant grip allows for maximum leverage.
- Quick Identification:** Easy-to-read tip markings on the handle make identification quick and easy.
- Rugged and Durable:** Designed to last with a heat-treated, chrome-plated shaft.



CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/ SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891355	Keystone Tip Screwdriver	1-1/2"	1/4"	3-1/4" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1891352	Keystone Tip Screwdriver	4"	1/4"	8-1/8" x 1" x 1"	4 oz.	EA	1
1891356	Keystone Tip Screwdriver	4"	1/4"	8" x 1-1/8" x 1-1/8"	4 oz.	EA	1
1891358	Keystone Tip Screwdriver	6"	5/16"	10-1/2" x 1-1/4" x 1-1/4"	6 oz.	EA	1
1891286	Keystone Tip Screwdriver	8"	3/8"	12-1/2" x 1-3/8" x 1-3/8"	8 oz.	EA	1
1891287	Cabinet Tip Screwdriver	3"	3/16"	6-1/2" x 1" x 1"	3 oz.	EA	1
1891288	Cabinet Tip Screwdriver	6"	3/16"	9-1/2" x 1" x 1"	3 oz.	EA	1
1891289	Cabinet Tip Screwdriver	6"	1/4"	10-1/4" x 1" x 1"	4 oz.	EA	1

SCREWDRIVERS CONT'D

Terminal Block Screwdriver

A unique screw calls for a unique screwdriver. The Terminal Block Screwdriver is one-of-a-kind with a heat-treated shaft and super-comfortable grip.

Features & Benefits

- More Torque: A slip-resistant grip allows for maximum leverage.
 Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
 Rugged and Durable: Designed to last with a heat-treated, chrome-plated shaft.
 Secure Fit: A machined tip allows for a better fit.

CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891397	Terminal Block Screwdriver	4"	Terminal Block	7-1/8" x 7/8" x 1"	2 oz.	EA	1

Phillips Tip Screwdrivers

Forget screws that won't strip. You need a screwdriver that won't strip them. Introducing the hilmor Phillips Tip Screwdriver featuring machined tips for a precise fit. A rugged shaft and comfortable handle round out this tool nicely.

Features & Benefits

- More Torque: A slip-resistant grip allows for maximum leverage.
 Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
 Rugged and Durable: Designed to last with a heat-treated, chrome-plated shaft.
 Secure Fit: A machined tip allows for a better fit.

CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891290	Phillips Tip Screwdriver	3"	1PH	6-1/2" x 1" x 1"	3 oz.	EA	1
1891391	Phillips Tip Screwdriver	1-1/2"	2PH	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1891392	Phillips Tip Screwdriver	4"	2PH	8" x 1" x 1"	4 oz.	EA	1
1891393	Phillips Tip Screwdriver	7"	2PH	11" x 1" x 1"	5 oz.	EA	1
1891394	Phillips Tip Screwdriver	6"	3PH	10-1/2" x 1-1/4" x 1-1/4"	6 oz.	EA	1

Screwdriver Sets

Tip markings on the handle for quick ID. Heat-treated shafts for extra durability. There are thousands of screwdrivers to choose from, but only one set says hilmor. Available in 5-piece or 7-piece sets.

Features & Benefits

- More Torque: A slip-resistant grip allows for maximum leverage.
 Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
 Rugged and Durable: Designed to last with a heat-treated, chrome-plated shaft.
 Secure Fit: A machined tip allows for a better fit.

Product Specifications

Includes:

- 5-piece Set: #2 Phillips Tip Round Shank 4", 3/16" Cabinet Tip Round Shank 6", 1/4" Cabinet Tip Round Shank 6", 1/4" Keystone Tip Square Shank 4", 5/16" Keystone Tip Round Shank 6"
 7-piece Set: #1 Phillips Tip Round Shank 3", #2 Phillips Tip Round Shank 4", 3/16" Cabinet Tip Round Shank 3", 3/16" Cabinet Tip Round Shank 6", 1/4" Cabinet Tip Round Shank 6", 1/4" Keystone Tip Square Shank 4", 5/16" Keystone Tip Round Shank 6"

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891087	5-Piece Screwdriver Set	10-1/4" x 1-1/4" x 1-1/4"	1.4 lbs.	EA	1
1891088	7-Piece Screwdriver Set	10-1/2" x 1-1/4" x 1-1/4"	1.7 lbs.	EA	1

Precision Screwdriver Set

When the job calls for precision, reach for hilmor. The Precision Screwdriver Set features machined tips and rotating heads. Plus, a convenient storage pouch keeps you organized.

Features & Benefits

- Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
 Maximum Precision: A rotating head allows for precise adjustments while giving you greater control.
 Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
 Storage: Pouch included for quick and easy storage.

Product Specifications

Includes: 1/16" x 2" Slotted, #0 x 3" Phillips, 3/32" x 3" Slotted, 1/8" x 4" Slotted, 1/8" x 6" Slotted

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891089	Precision Screwdriver Set	10-1/4" x 5" x 1/8"	10 oz.	EA	1



1891397

hilmor



1891290

hilmor



1891087



1891088

hilmor



1891089

hilmor

TOOLS | HAND TOOLS

UTILITY KNIVES

Snap-Off Utility Knife

Lightweight and easy to use, this Utility Knife is an ideal general-purpose knife for the shop, garage, and around the house. The fully retractable blades lock in any position for safe cutting. When the blade gets dull, break off a segment for a sharp, new edge. The Knives accept universal replacement blades and is made from high impact polystyrene for durability. Includes: 1-piece large snap-off knife with 8 sharp points per blade; plus built-in blade breaker.



535-42047

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
535-42047	Snap-Off Utility Knife	EA	10
535-42330	Replacement Blades	PK	1

Retractable Utility Knife

This is a great knife to have by your side. Quick cuts come standard with a unique trigger grip. Plus, you've got a few spare blades in the handle when you need them.



1885434



Features & Benefits

- Rugged and Durable:** An all-metal body increases life and durability.
- Secure Storage:** Conveniently store up to five extra blades in the handle.
- Easy to Change:** Change your blade quickly and easily without the use of a separate tool.
- Easy to Cut:** Get easier cutting on the pull with a unique trigger grip.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885434	Retractable Utility Knife	1-3/4" x 1" x 6-3/4"	6 oz.	EA	1
1885432	Utility Knife Blades - 5 Pack	NA	NA	EA	1

Folding Utility Knife

hilmar's Folding Utility Knife stands up to the test with an all-metal body. It's your new knife.



1885433



Features & Benefits

- Rugged and Durable:** An all-metal body increases life and durability.
- Securely Locks Blade:** A blade-locking mechanism prevents the blade from coming out during use.
- One-handed Operation:** A liner-lock for one-handed operation and extra safety.
- Superior Versatility:** A built-in wire-stripping channel for up to 10-gauge wire is there when you need it.
- Belt Clip:** A belt clip keeps knife close for easy access.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885433	Retractable Utility Knife	1-3/4" x 1" x 6-3/4"	6 oz.	EA	1
1885432	Utility Knife Blades - 5 Pack	NA	NA	EA	1

WRENCHES AND PLIERS

Tongue and Groove Pliers

These patented design pliers have permalock fasteners with a reinforcing edge. Pliers adjust smoothly between jaw positions without the distance in the handle growing wider. Lever action allows for maximum force transmission. The grips are also dipped in plastic for a more comfortable hold. Made in the USA.



545-440

545-430

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
545-426	6-1/2" Tongue and Groove Pliers	EA	1
545-420	9-1/2" Tongue and Groove Pliers	EA	1
545-422	9-1/2" Curved Jaw Tongue and Groove Pliers	EA	1
545-430	10" Tongue and Groove Pliers	EA	1
545-440	12" Tongue and Groove Pliers	EA	1
545-442	12" Curved Jaw Tongue and Groove Pliers	EA	1
545-460	16" Tongue and Groove Pliers	EA	1

Adjustable Wrenches

Channellock® Adjustable Wrenches are rugged with chrome vanadium steel construction. They feature measurement scales that are laser engraved (in. on front, mm. on reverse) and handy for sizing nuts, pipe, and tube diameters. They also have an optimal head width and non-protruding jaws that allow accessibility for hard to reach applications. The precise 4-thread knurl improves adjustment accuracy.



545-804

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
545-804	4" Channellock Adj. Wrench, 1/2" Cap., Chrome	EA	1
545-804N	4" Channellock Adjustable Wrench, Black Oxide	EA	1
545-804S	4" Channellock Adjustable Wrench, Slim Jaw	EA	1

HAND TOOLS | TOOLS

WRENCHES AND PLIERS CONT'D

Digital Adjustable Torque Wrench

Tightening to true torque when working on mini-splits is serious business. Under tightening could result in refrigerant leaks, while overtightening could mean burst tubing. That's why the hilmer Digital Adjustable Torque Wrench is critical to perfecting torque time and time again. The 9 factory memory settings make it quick to set common torque values, while the digital display shows the amount of force applied to the flare nut. And if that didn't make the job easy enough, lights and buzzers illuminate and sound when the desired torque is achieved.

Features & Benefits

Lighten Your Load: Adjustable jaw eliminates the need to carry around extra heads.

Easy To Use: Nine programmable memory settings allow for quick access to the most common torque levels.

Precise Readings: Digital adjustments help ensure torque measurement accuracy.

Extra Confidence: LED lights and buzzer indicate that desired torque has been reached.

Product Specifications

Jaw Capacity: 1/4" (5mm) to 1-1/16" (27mm) to accommodate up to 5/8" flare nuts

Accuracy: +/-3%

Batteries: AA (x2)

Warranty: 2 lbs.

Technical Specifications

Torque Range (N-m): 6.8 - 135

Torque Range (Ft-lbs): 5 - 99.5

Torque Range (In-lbs): 60 - 1,195

Torque Range (kg-cm): 69 - 1,378

Battery Saver: Automatic Shutdown

after 4 Minutes of Inactivity

Measurement Increments: 0.1 (N-m, Ft-lb)

Operation Modes: Track, Peak

Memory Presets: 9

Operating Temperature: 14°F to 140°F



1963826

hilmer

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W)	WEIGHT	UOM	ORDER MUL.
1963826	Digital Adjustable Torque Wrench	17" x 2-3/8"	2 lbs.	EA	1

Service Wrenches

Smart features that save your knuckles and your time. Our Straight Service Wrench makes changing sizes quick and easy. Our Offset Service Wrench makes maneuvering around cramped spaces second nature. The reversible Ratchet Wrench has square openings of 1/4" and 3/16" on one end and 3/8" and 5/16" on the other end. And, when it comes to accessing liquid- and suction-based valves, reach for our Hex Key Adapter. It works on 3/16" and 5/16" hex valves.



1839042

1839043

hilmer

CATALOG NO.	DESCRIPTION	SQUARE SIZES	HEX SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839042	Service Wrench	1/4", 3/16", 3/8", 5/16"	NA	5-1/2" x 1/2" x 7/8"	3 oz.	EA	1
1839043	Service Wrench	1/4", 3/16", 3/8", 5/16"	NA	5-1/4" x 3/4" x 7/8"	3 oz.	EA	1
1839045	Service Wrench	1/4", 3/16"	1/2", 9/16"	6-1/4" x 1/2" x 1"	5 oz.	EA	1
1839046	Hex Key Adapter	3/16", 5/16"	NA	1/2" x 2/5" x 2/5"	1 oz.	EA	1

Adjustable Wrenches

Take your pick of imperial or metric scales. They come standard on all of our Adjustable Wrenches. They're made to fit in your hand with ergonomic grips and made to last by hilmer.

Features & Benefits

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

Added Versatility: Get two-in-one capabilities with both inch and metric scales.



1885422

1885421

1885370

1885369

hilmer

CATALOG NO.	DESCRIPTION	SIZES	JAW CAPACITY UP TO:	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885369	Adjustable Wrenches	6"	1"	6-3/8" x 1-3/4" x 1/2"	6 oz.	EA	1
1885370	Adjustable Wrenches	8"	1-1/8"	8-1/4" x 1" x 5/8"	12 oz.	EA	1
1885421	Adjustable Wrenches	10"	1-1/4"	10" x 2-5/8" x 3/4"	1.1 lbs.	EA	1
1885422	Adjustable Wrenches	12"	1-1/2"	12-1/8" x 2-7/8" x 3/4"	1.7 lbs.	EA	1

TOOLS | HAND TOOLS

WRENCHES AND PLIERS CONT'D

Quick-Adjusting Tongue & Groove Pliers

We've made an adjustment to standard pliers. Our Quick-Adjusting Tongue and Groove Pliers feature a simple push button to give you a quick precision grip on pipes, fasteners and more.

Features & Benefits

- Simple Sizing:** A push button allows for quick adjustments while multiple grooves guarantee precise positioning.
- Comfortable Grip:** Over-molded handle reduces hand fatigue and won't slip or twist.
- Strong Hold:** Machined jaws increase grip on the material every time.



CATALOG NO.	DESCRIPTION	LENGTH	JAW CAPACITY	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890996	Quick-Adjusting Tongue and Groove Pliers	8"	1-1/2"	8-1/4" x 5/8" x 1-3/4"	9 oz.	EA	1
1890997	Quick-Adjusting Tongue and Groove Pliers	10"	1-3/4"	10-1/8" x 3/4" x 2-1/4"	13 oz.	EA	1
1890998	Quick-Adjusting Tongue and Groove Pliers	12"	2-3/16"	12-1/4" x 3/4" x 2-1/2"	1.4 lbs.	EA	1

Tongue & Groove Pliers

Like a snapping turtle, these pliers grab hold and won't let go. Machined jaws guarantee a lock-tight grip, and over-molded handles won't slip or twist. 12" model adjusts to a 2-1/16" jaw capacity.

Features & Benefits

- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.
- Strong Hold:** Machined jaws increase grip on the material every time.



CATALOG NO.	DESCRIPTION	SIZES	JAW CAPACITY	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885366	Tongue and Groove Pliers	8"	1"	8" x 2-1/2" x 3/4"	10 oz.	EA	1
1885367	Tongue and Groove Pliers	10"	1-11/16"	10-1/4" x 3-1/4" x 3/4"	1.1 lbs.	EA	1
1885368	Tongue and Groove Pliers	12"	2-1/16"	12" x 3-1/4" x 7/8"	1.5 lbs.	EA	1

Multi-Function Pliers

The hilmor Multi-Function Pliers bring 5 tools into one! They feature a long nose for grabbing and looping wire. The stripper portion can strip 8 AWG to 18 AWG. The curved cutting blade effectively and efficiently cuts through larger wire sizes. The forged alloy steel provides maximum tool strength and durability and the hot-riveted joint ensures a smooth action and reduced hand wobble.

Features & Benefits

- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.
- Strong Hold:** Forged alloy steel with hot rivet joint provides maximum tool strength and smooth action.
- Stays Sharp:** Wire stripper strips 8 AWG to 18 AWG (solid wire), 10 AWG to 20 AWG (stranded wire).



Product Specifications

Screw Sizes (Shearing): 6-32, 8-32

CATALOG NO.	DESCRIPTION	DIMENSIONS (D X W X H)	UOM	ORDER MUL.
1885391	Multi-function Pliers	10.1" x 3.05" x 1"	EA	1

Lineman's Pliers

Grab. Twist. Cut. Repeat. Over and over again. A laser-hardened cutting edge stays sharp longer, and cross-cut knurled jaws guarantee a strong grip time after time. hilmor Lineman's Pliers will last.



Features & Benefits

- Stays Sharp:** A laser-hardened cutting edge will stay sharper for longer.
- Strong Hold:** Cross-cut knurled jaws increase grip on the material every time.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885399	Lineman's Pliers	8-1/2"	8-3/4" x 2" x 7/8"	13 oz.	EA	1
1885411	Lineman's Pliers	9-1/2"	9-1/2" x 2-1/4" x 7/8"	1.0 lbs.	EA	1

Diagonal Cutting Pliers

What's our angle? To make a great pair of pliers. The Diagonal Cutting Pliers stay sharp as a samurai sword with a laser-hardened cutting edge.



Features & Benefits

- Stays Sharp:** A laser-hardened cutting edge will stay sharper for longer.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885412	Diagonal Cutting Pliers	6"	6-3/4" x 2-1/8" x 3/4"	4 oz.	EA	1
1885362	Diagonal Cutting Pliers	7"	7-1/4" x 2-1/8" x 3/4"	8 oz.	EA	1
1885363	Diagonal Cutting Pliers	8"	8" x 2-1/8" x 3/4"	12 oz.	EA	1

HAND TOOLS | TOOLS

WRENCHES AND PLIERS CONT'D

Long Nose Pliers

It's tough to beat a good pair of pliers. A laser-hardened cutting edge, cross-cut knurled jaws and over-molded handles make hilmor Long Nose Pliers pretty darn tough to beat.



Features & Benefits

- Stays Sharp:** A laser-hardened cutting edge will stay sharper for longer.
- Strong Hold:** Cross-cut knurled jaws increase grip on the material every time.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885397	Long Nose Pliers	6"	6-7/8" x 2-1/8" x 5/8"	4 oz.	EA	1
1885398	Long Nose Pliers	8"	8-5/8" x 2-1/8" x 3/4"	8 oz.	EA	1

Self-Adjusting Wire Stripper

All wire strippers are not created equal. These come with the ability to crimp insulated and non-insulated terminals 10-22AWG. Plus, clearly marked indicators mean you can strip without damage.



Features & Benefits

- Added Versatility:** Crimp insulated and non-insulated terminals 10-22 AWG.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.
- Maximum Control:** An adjustable stop controls the length of wire being stripped.
- Precise Stripping:** A micro-adjusting knob allows for stripping down to 30 AWG and up to 8 AWG.
- Self-Adjusting:** Automatically adjusts to strip and cut wire 10-24 AWG.

Product Specifications

- Capacity: Wire: 10-24AWG
- Insulated Terminals: 10-22AWG
- Non-insulated Terminals: 10-22AWG

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885423	Self-Adjusting Wire Stripper	8-3/8" x 3-1/2" x 5/8"	13 oz.	EA	1

In-Line Wire Strippers

Eliminate the awkward side pull and strip wires with power and confidence. The ergonomic, in-line orientation is designed to strip wire with ease using a natural pulling motion. A Patented 90-degree angled head fits into tight spaces and features a curved cutting edge that will stay sharper and longer. Electrical work has never been this easy.

Features & Benefits

- Ergonomic Design:** 90° angled head provides a natural, in-line, wire stripping orientation and movement.
- Strong Hold:** 90° Angled Head – Designed to Fits into Tight Spaces
- Stays Sharp:** A hardened cutting edge will stay sharper for longer.
- Wire Gauge Capacity:** Strip and cut wire 6-12 AWG. [1885428]
Strip and cut 12/2 14/2 dual conductor wire. [1885425]

Product Specifications

- 1885425: Strips and Cuts: 12/2, 12/2 Dual NM-B, 12, 14 AWG
Screw Shearing: 6-32, 8-32
Cutter Type: Curved
- 1885428: Strips and Cuts: 6, 8, 10, 12, 14 AWG Solid
8, 10, 12, 14 Stranded
Screw Shearing: 6-32, 8-32
Cutter Type: Curved

Wire Strippers

The hilmor Wire Strippers feature easy-to-read size markings, which means you can strip wires with ease and without damage. Electrical work is no laughing matter, and these Wire Strippers are no joke.



Features & Benefits

- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.
- Quick ID:** Easy-to-read size markings on the jaws make identification simple.
- Bolt Cutting:** Cuts 4-40, 5-40, 6-32, 8-32, 10-24, 10-32 bolts and screws to desired size.*1885424 Only.

CATALOG NO.	DESCRIP.	SIZES	CAPACITY	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885427	Wire Strippers	6"	10-20AWG	6-1/2" x 2-1/4" x 5/8"	5 oz.	EA	1
1885426	Wire Strippers	7"	10-20AWG	7-1/4" x 2-1/8" x 5/8"	6 oz.	EA	1
1885424	Wire Strippers	8"	10-20AWG	8" x 2-5/8" x 5/8"	8 oz.	EA	1

Crimping Tool

Crimp. Cut. We've got you covered. The hilmor Crimping Tool handles both insulated and non-insulated terminals. Over-molded handles and a hardened cutting edge come standard, too.



Features & Benefits

- Stays Sharp:** A hardened cutting edge will stay sharper for longer.
- Comfortable Grip:** Over-molded handles reduce hand fatigue and won't slip or twist.

Product Specifications

- Capacity: 10-22AWG
- Wire: 10-22AWG
- Insulated Terminals: 10-22AWG
- Non-Insulated Terminals: 10-22AWG

CATALOG NO.	DESCRIPTION	SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885429	Crimping Tool	10"	9-7/8" x 2-1/4" x 3/4"	1.1 lbs.	EA	1



CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885425	In-Line Wire Strippers	10"	10" x 3.9" x 1"	.5 lbs.	EA	1
1885428	Heavy Duty In-Line Wire Strippers	10"	10" x 3.9" x 1"	.5 lbs.	EA	1

TOOLS | HAND TOOLS / DRAIN LINE CLEANING & CLEARING

WRENCHES AND PLIERS CONT'D

Locking Pliers Pinch-Off Tool

The hilmer Locking Pliers Pinch-Off Tool is rugged and durable – a lot like you. Made from high-grade, heat-treated alloy steel, this tool is built to handle whatever you throw at it. The pinch-off mechanism locks on to tubing so your hands are free to get the real job done.



Features & Benefits

Rugged and Durable: Pliers are built to last, manufactured from high-grade, heat-treated alloy steel for durability.

Added Versatility: Designed to pinch off and lock on to 1/8" to 5/8" diameter tubing, leaving both hands free to do other work.

Product Specifications

Sizes: 1/8" - 5/8"

CATALOG NO.	DESCRIPTION	DIMENSIONS (D X W X H)	WEIGHT	UOM	ORDER MUL.
1937673	Locking Pliers Pinch-Off Tool	7-1/4" x 2-1/4" x 1"	12 oz.	EA	1

Refrigerant Recovery Tool

Smart features that save refrigerant and time. Our Refrigerant Recovery Tool makes evacuation equipment quick and easy.



Features & Benefits

Added Convenience: Self-adjusting for 1/4" and 1/2" lines.

Secure Fit: Securely locks and seals.

Rugged and Durable: Stainless Steel Piercing Valve. Made from high carbon, heat treated steel jaws.

Product Specifications

Sizes: 1/8" - 5/8"

CATALOG NO.	DESCRIPTION	DIMENSIONS (D X W X H)	WEIGHT	UOM	ORDER MUL.
RRT100	Refrigerant Recovery Tool	1-1/2" x 5" x 11-1/2"	0.55 lbs.	EA	1

DRAIN GUN AND CARTRIDGES

SWOOSH® Drain Gun® Double Shot™ - 20g SWOOSH® CO₂ Cartridges & Case

The SG-2 SWOOSH Drain Gun® Double Shot allows you to clear drain lines better than before. The SG-2 SWOOSH Drain Gun® Double Shot can use a single 20g cartridge. To unleash the full capacity of the SG-2, load two 20g cartridges for 2.5X more SWOOSH! The SWOOSH Drain Gun® Double Shot features indicators that provide visual reference of pressurized chambers and the safety lock prevents accidental discharge. The SWOOSH Drain Gun® Double Shot easily stores cartridges inverted in either chamber when not in use. The SG-2KIT features the SG-2 Drain Gun® Double Shot, two 20 gram SWOOSH cartridges, a reinforced vinyl hose that's equipped with a tapered fitting to work on 3/8" - 3/4" drain openings, and a universal adapter for multiple drain line clearing accessories. It comes packaged in a blow-molded case with removable EVA foam.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SG-2KIT	SWOOSH® Drain Gun® Double Shot™ with 2 20g Cartridges & Case	EA	6

SWOOSH® Drain Gun® BIG SHOT™ - 20g SWOOSH® CO₂ Cartridges

The SWOOSH® Drain Gun® BIG SHOT™ uses new larger 20 gram SWOOSH® cartridges that provide 25% more capacity to better remove clogs, gunk and debris from drain lines. And the SWOOSH® Drain Gun® BIG SHOT™ includes a flexible hose with tapered fitting to easily connect with drain line opening for fast and easy clearing.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SG-1	SWOOSH® Drain Gun® BIG SHOT™	EA	6
SGC-12	SWOOSH® 20g CO ₂ Cartridges, pack of 12	PK	1

Drain Gun® - 16g SWOOSH® CO₂

Clears condensate drains with a SWOOSH! A lightweight (3 oz.) portable tool designed to clean out drain lines instantly. New larger SWOOSH CO₂ cartridges now deliver 800 PSI of oil free air to clear the line. Each unit comes equipped with a tapered fitting to work on 3/8" - 3/4" drain openings. Flexible hose assembly maneuvers through cabinets, coils and hard to reach drains. Cartridges are environmentally safe and recyclable. No need for air or nitrogen tanks. Reduces labor costs and time on service calls.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GG-1	Drain Gun® for A/C Condensate Lines	EA	6
GGC-12	SWOOSH® 16g CO ₂ Cartridges, pack of 12	PK	1



DRAIN LINE CLEANING AND CLEARING | TOOLS

REFILLABLE, PORTABLE AND OTHER DRAIN LINE CLEARING

DrainDawg™

The DrainDawg™ is a complete condensate drain cleaning kit, including the CT-475M deluxe nitrogen / CO₂ 0-475 psi regulator, the TG-10 & BS-25 ten foot hose and blowgun assembly, and the CW-15 fifteen inch whip hose. Also included is the AP-DD DrainDawg™ Accessory Fitting Kit which contains the DF-75 DrainDawg™ inflatable tip, the CK-141 3/4"-1" cone fitting, the FA-02 CO₂ to nitrogen adapter, the QN-S3 needle tip, and the TC-25 tire chuck. Made in the USA.



CB-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CB-2	DrainDawg™ Kit	EA	3

DrainKat™

The DrainKat™ is an over-the-shoulder refillable, nitrogen or CO₂ mini drain cleaning kit. Featuring a small cylinder that holds 9 cubic feet of nitrogen or 2-1/2 pounds of CO₂. The cylinder includes an integral mounted regulator for quick and easy adjustment of discharge pressure. Get exactly the amount of pressure you need with a quick adjustment on the regulator. Furnished complete with an 87" hose and drain gun kit, the CW-15 whip hose, and the AP-DK DrainKat™ Accessory Fitting Kit which contains the DF-75 DrainDawg™ inflatable tip, the CB-03 3/4"-1" cone fitting, the FA-01 male to male CO₂ to nitrogen adapter, the FA-03 CO₂ trans-fill adapter, and the the QN-S3 needle tip. Made in the USA.



MBK-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MBK-6	DrainKat™ Kit	EA	2

ACCESSORIES

Drain Gun® - 16g SWOOSH® CO₂ Accessories

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GG-1A	Drain Gun® Adapter Kit	EA	1
GG-1H	Drain Gun® Hose Assembly	EA	1
GG-1TF	Drain Gun® Replacement Tip	EA	1
GG-1BOR	Drain Gun® Bottom O-Ring, Pack of 5	PK	1



GG-1A



DrainDawg™ and DrainKat™ Fittings

The DrainDawg™ and DrainKat™ products are compatible with a series of fittings to connect to condensate drain lines and hoses. The fittings are available individually, or as kits for the DrainDawg™ and DrainKat™.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
AP-DD	DrainDawg™ Accessory Pack	EA	1
AP-DK	DrainKat™ Accessory Pack	EA	1
BS-25	Blow Gun with Safety Tip for DrainDawg™ or DrainKat™	EA	1
CB-03	3/4" Cone Tip with Female Thread for DrainDawg™ or DrainKat™ Blow Gun	EA	1
CK-141	3/4" Cone with Male Thread for Use with Whip Hose for DrainDawg™ or DrainKat™	EA	1
CW-15	15" Whip Hose for DrainDawg™ or DrainKat™	EA	1
DF-75	DrainDawg™ Inflatable Tip for Drain Line Blowout	EA	1
FA-01	Nitrogen to CO ₂ Adapter, Male by Male for DrainKat™	EA	1
FA-02	Nitrogen to CO ₂ Adapter, Female by Female for DrainDawg™	EA	1
FA-03	CO ₂ Transfill Adapter for DrainKat™	EA	1
QN-S3	Needle Tip with Female Thread for DrainDawg™ or DrainKat™ Blow Gun	EA	1
TC-25	Tire Chuck for DrainDawg™	EA	1
TG-10	120" Blow Gun Hose for DrainDawg™	EA	1
1TG-87A	87" Blow Gun Hose for DrainKat™	EA	1



AP-DD

TOOLS | SERVICE EQUIPMENT

LINESET CLEANER`

Lineset Cleaner

The Hilmer Lineset Cleaner uses a pressurized source to launch a foam puck into the line set to wipe the pipe clean of contaminants and remaining refrigerants.

Features & Benefits

Picture-Perfect Cleaning: Simply connect the correct nozzle, chamber the corresponding pig size, connect to a regulated compressed nitrogen source, and pull the trigger for a perfectly clean lineset.

Twice the Versatility: One tool that has the ability to effectively wipe contaminants and remaining oil from linesets ranging from 3/8" to 7/8".

Premium Care: The rinseable/reusable foam cleaning pigs are specially formulated and manufactured to flow through normal lineset configurations and most deformations.

Product Specifications

Max PSI: 60 PSI
Connector Size for Pressure Inlet: 1/4" SAE male, 1.02 lbs



HLC007

HLP078, HLP034, HLP058,
HLP012, HLP038

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HLC007	Lineset Cleaner	NA	16.5" x 3.2" x 12.4"	7 lbs.	EA	1
HLP038	Foam Pig	3/8"	NA	NA	EA	1
HLP012	Foam Pig	1/2"	NA	NA	EA	1
HLP058	Foam Pig	5/8"	NA	NA	EA	1
HLP034	Foam Pig	3/4"	NA	NA	EA	1
HLP078	Foam Pig	7/8"	NA	NA	EA	1
HLP099	Assorted Foam Pigs - 2 EA	NA	NA	NA	EA	1
HLP095	95 Piece Contractor Pig Pack	NA	NA	NA	EA	1

VACUUM GAUGES

Wireless Vacuum Gauge

Easy positioning. Easier readings. Easily, the best vacuum gauge.

Features & Benefits

Easy to Read: LED backlit screen for easy to read display.

Long Battery Life: 80 hour battery life for Remote Sensor and Handheld.*

Added Convenience: Programmable audible micron alarm with high and low settings.

Added Versatility: Includes foldable hook and magnet to easily attach to any unit.

*measured with LED backlight turned off

Product Specifications

Contents: 1 - Remote Sensor with 3 AAA Batteries **Resolution:** 5 to 2,000 microns - 1 micron
1 - Handheld Display with 3 AA Batteries 2,001 to 5,000 - 100 microns
1 - 1/4" Female Flare Adaptor 5,001 to 10,000 - 250 microns
1 - Protective Case 10,001 to ATM - 1,000 microns

Accuracy: +/- 5% of Reading, +/- 10 microns **Refresh Rate:** 0.5 Seconds

Units: micron, mTorr, Torr, mmhg, mBar, kPa and Pa **Battery Life:** 80 Hours (Without Backlight)

Wireless Range: 33 Feet (10 meters) Unobstructed



1950217

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1950217	Wireless Vacuum Gauge	16.5" x 3.2" x 12.4"	7 lbs.	EA	1
1950219	Vacuum Gauge Sensor	NA	NA	EA	1
1950531	Vacuum Gauge Sensor and Transmitter	NA	NA	EA	1

SERVICE EQUIPMENT | TOOLS

VACUUM GAUGES

Compact Vacuum Gauge

The hilmer Compact Vacuum Gauge is an all-in-one micron gauge that is durably constructed for everyday use and abuse. An easy to read backlit display provides readings and the two button operation simplifies field use.

Features & Benefits

- Easy to Read: Backlit LCD makes reading in the dark easy.
- Convenient Storage: Protective case keeps the gauge safe and quick to grab.
- Added Versatility: Full range readings lets you see the progress right away.
- Superior Protection: Handles 800 psi momentarily if a mistake is made.

Product Specifications

- Contents: 1 - Vacuum Gauge Resolution: 1 micron (1 to 2,000 microns)
- 1 - Protective Case 100 microns (2,000 to 20,000 microns)
- 1 - AAA Batteries 1000 microns (20,000 to 100,000 microns)
- Units: microns, mBar & mmHg 10000 microns (100,000 to 300,000 microns)
- Accuracy: 5% ±10 microns (1 to 1,000 microns) at 25°C
- 20% (1,000 to 5,000 microns) at 25°C



CVG1200



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	UOM	ORDER MUL.
CVG1200	Wireless Vacuum Gauge	4.8" x 2.2" x 1.2"	EA	1

REFRIGERANT SCALES

Wireless Refrigerant Scale

Rugged & durable to handle all terrains. Use inside the case for added protection from the elements. The hilmer Wireless Refrigerant Scale remote provides the user with a market leading 130 foot wireless range to help tackle those challenging locations.

Features & Benefits

- Accurate Readings: Provides readings in 0.2 oz increments.
- Easy to Read: Backlit LED display is easy to read.
- Added Versatility: Scale can be used in or out of the protective case.
- Long Range: Wireless remote keeps working up to 130 ft away.

Product Specifications

- Contents: 1 - Wireless Refrigerant Scale Battery Life Duration: 40 hours
- 1 - Remote Resolution: 0.2 oz. (5 g)
- 5 - AAA Batteries Capacity: 220 lbs. (100 kg)
- 5 - AA Batteries Wireless Range: 130 ft. (40m)
- 1 - Protective Case Operating Temperature: -10° to 40°C (14° to 104°F)
- Units: kg or lbs. & oz.



RSWL220



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
RSWL220	Wireless Refrigerant Scale	18" x 14-3/4" x 3-1/2"	10.6 lbs.	EA	1

Refrigerant Scale

Rugged & durable to handle all terrains. Use inside the case for added protection from the elements.

Features & Benefits

- Accurate Readings: Provides readings in 0.2 oz increments.
- Easy to Read: Backlit LED display is easy to read.
- Added Versatility: Scale can be used in or out of the protective case.
- Secure: Rubberized surface provides tank stability and protects scale.

Product Specifications

- Contents: 1 - Refrigerant Scale
- 5 - AAA Batteries
- 1 - Protective Case
- Battery Life Duration: 40 hours
- Resolution: 0.2 oz. (5 g)
- Capacity: 220 lbs (100 kg)



RSW220



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
RSW220	Wireless Refrigerant Scale	18" x 14-3/4" x 3-1/2"	10.6 lbs.	EA	1

TOOLS | SERVICE EQUIPMENT

LEAK DETECTION

Heated Diode Refrigerant Leak Detector

Tight Space? No problem. Find leaks fast with the flexible probe that allows access to all of those hard-to-reach areas.

Features & Benefits

Added Convenience: Audible and visual notification.
 Easy to Read: LED screen for easy to read display.
 Added Versatility: Works on all halogenated refrigerants.
 Small Space Capable: Flexible probe allows access to the hard-to-reach areas.

Product Specifications

Contents: 1 - Leak Detector
 1 - Accessory Case
 3 - AA Batteries

Battery Life: 6 hours

Warranty: 2 Year Limited

Technical Specifications

Sensor Type: Semi-Conductive Sensor (Heated Diode)
 Sensor Life: 5 years (Typical)
 Maximum Sensitivity: (0.14 oz) 4 grams/year
 Response Time: 3 Seconds
 Warm-Up Time: 30 Seconds
 Operating Environment: 32°F (0°C) to 104°F (40°C) at <75% RH (non-condensing)

Display Method: LED Display
 Notification Mode: LED Display and Audio
 Battery: (3) 1.5V AA

Battery Saver: Automatic Shutdown after 10 Minutes of inactivity

Working Time: 6 Hours

Certifications: SAE J1627, SAE J2791, SAE J2913, EN14624: 2012

Refrigerants: It will detect all halogenated (including Chlorine or Fluorine) refrigerants.

This includes, but is not limited to:

Detected: CFC: R12, R11, R500, R503

HCFC: R22, R123, R124, R502

HFC: R134A, R404A, R410A, R407C



LDHD250

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
LDHD250	Heated Diode Refrigerant Leak Detector	10-1/4" x 2-1/4" x 2-1/4"	14 oz. (397g)	EA	1

Infrared Refrigerant Leak Detector

This detector is in it for the long haul. The 10-year sensor life will keep up with all of your daily demands.

Features & Benefits

Extra Confidence: Built to last with a 10-year sensor life.
 Easy to Read: The TFT LCD screen provides a clear visual confirmation of the leak location.
 Added Convenience: Audible and visual notification for leak detection.
 Added Versatility: Works on all halogenated refrigerants.

Product Specifications

Contents: Dimensions:
 1 - Leak Detector Length: 7.9"
 1 - 10 pack of filters Width: 3.3"
 1 - Charger Height: 1-1/2"
 1 - Cable Weight: 14.6 oz. (415g)
 1 - Accessory Case

Technical Specifications

Sensor Type: Infrared Spectrum Absorption
 Sensor Life: 10 years (Typical)
 Maximum Sensitivity: (0.14 oz) 4 grams/year
 Response Time: 3 Seconds
 Warm-Up Time: 30 Seconds
 Operating Environment: 32°F (0°C) to 104°F (40°C) at <75% RH (non-condensing)

Display Method: TFT LCD Display
 Notification Mode: TFT LCD Display and Audio
 Battery: Built-in Rechargeable Lithium Battery
 Battery Saver: Automatic Shutdown after 10 Minutes of inactivity

Working Time: 6 Hours

Charging Time: 4 Hours

Certifications: SAE J1627, SAE J2791, SAE J2913, EN14624: 2012

Refrigerants: It will detect all halogenated (including Chlorine or Fluorine) refrigerants.

Detected: This includes, but is not limited to:

CFC: R12, R11, R500, R503

HCFC: R22, R123, R124, R502

HFC: R134A, R404A, R410A, R407C

CH: R600A



LDIR150

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
LDIR150	Infrared Refrigerant Leak Detector	7.9" x 3.3" x 1-1/2"	14.6 oz. (415g)	EA	1

SERVICE EQUIPMENT | TOOLS

VACUUM PUMPS

Vacuum Pumps

Your days of messing around with clunky, unreliable pumps are over. These two-stage rotary vane vacuum pumps have been retooled with features to make pulling vacuum down to 25 microns a breeze.

Features & Benefits

- Hands-Free Carry:** Two durable hoist points make transporting the vacuum pump easier. Compatible with the hilmar HVAC/R Carrying Strap.
- Drains Oil Quickly:** A sloped and channeled housing helps oil drain fast.
- Extra Confidence:** A leak-proof valve isolates the pump from the system for accurate vacuum readings and easy oil change without losing a vacuum.
- Easy To Check Oil:** Quickly identify oil level and detect oil contamination through a large sight glass.
- High Efficiency:** 2-Stage rotary vane pump achieves a lower vacuum and a higher volumetric flow rate



1950532



CATALOG NO.	DESCRIPTION	CFM	MOTOR HP	POWER REQ.	MOTOR SPEED	INTAKE FITTING	ULTIMATE VACUUM	OIL CAPACITY	COMPLIANCE	WARRANTY	DIMENSIONS (L X W X H)	NET WEIGHT	UOM	ORDER MUL.
1947970	Vacuum Pump	3	1/3	4.5A, 120V, 60Hz	1720 RPM	1/4", 3/8"	25 Microns	11 oz.	CSA	2 Year Limited	13.6" x 5.5" x 10.7"	19.7 lbs.	EA	1
1948121	Vacuum Pump	5	1/2	7.5A, 120V, 60Hz	3440 RPM	1/4", 3/8", 1/2"	25 Microns	11oz.	CSA	2 Year Limited	13.6" x 5.5" x 10.7"	19.7 lbs.	EA	1
1948122	Vacuum Pump	9	1	5.5A, 120V, 60Hz	1720 RPM	1/4", 3/8", 1/2"	25 Microns	15 oz.	CSA	2 Year Limited	15.9" x 5.9" x 11.2"	36.2 lbs.	EA	1
1950532	Vacuum Pump	12	1	7.6A, 120V, 60Hz	2500 RPM	1/4", 3/8", 1/2"	25 Microns	15oz.	CSA	2 Year Limited	15.6" x 5.7" x 10.1"	25.5 lbs.	EA	1

Vacuum Pump Oil

Working in basements and crawlspaces all day, you're bound to get dirty. And so is your vacuum pump oil. Oil is the lifeblood of a vacuum pump and filters moisture and contaminants from the system. Clean oil means longer life for your pump and deeper, faster vacuum pulls.

CATALOG NO.	DESCRIPTION	VOLUME	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1948211	Vacuum Pump Oil	Quart (Case of 12)	2-5/8" x 4-1/8" x 8-7/8"	3 lbs.	EA	1
1948212	Vacuum Pump Oil	1 Gallon (Case of 6)	4-1/8" x 7" x 12"	8 lbs.	EA	1



1948212

1948211



RECOVERY MACHINES

Recovery Machine

Pulls like a powerhouse. Lifts like a feather. The recovery machine designed for you.

Features & Benefits

- Quick, Easy Access:** Conveniently located hose ports make connecting hoses easier and reduces strain
- Accurate, Easy to Read:** Digital LCD Screen provides accurate and easy to read pressure readings.
- Superior Security:** High- and low-pressure automatic shutoff protects machine and helps ensure safety.
- Convenient Storage:** Dedicated power cord wrap protects the cord and secures the plug.

Product Specifications

- Compatible Refrigerants:** R-12, R-134A, R-401C, R-406C, R-500, R-401A, R-412A, R-22, R-407C, R-509, R-409A, R-411A, R-411B, R-402B, R-401B, R-407B, R-502, R-408AR-401A, R-412A, R-22, R-407C, R-509, R-409A, R-411A, R-411B, R-402B, R-401B, R-407B, R-502, R-408A, R-407A, R-402A, R-407B, R-404A, R-507, R-410AR-407A, R-402A, R-407B, R-404A, R-507, R-410A
- Compliance:** CSA , FCC , AHRI740-1998 UL Verified



1950536



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1950536	Recovery Machine	9.2" x 4.9" x 12-1/2"	17-1/2 lbs.	EA	1
1950537	Intake Filter, O-Ring	NA	NA	EA	1

TOOLS | WORK LIGHTING

WORK LIGHTS

PIVOT™

The PIVOT™ is a light that has a 360° swivel hook with 240 lumens and magnetic base and back. Three AA batteries included.



111114

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111114	PIVOT™ Pivoting Work Light	EA	9

PIVOT™ 33

The Pivot™ 33 is a light that has a 360° swivel hook with 160 lumens and magnetic back and pivoting base. Lights on front and top with three AA batteries included. Available in yellow or camo.



24-458

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
24-458	PIVOT™ 33 Work Light	EA	9
24-460	PIVOT™ 33 Work Light, Camo	EA	9

Clip-On Zoom

The Clip-On Zoom Light provides 150 lumens, 90° pivoting capability coupled with the ability to zoom from broad to narrow. It includes a magnetic base and includes three AAA batteries.



111128

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111128	Clip-On Zoom Work Light	EA	8

HEMImini™

The HEMImini™ has up to 1000 lumens of power (4 hours - full power) with a 4400 mAh lithium-ion rechargeable battery. It includes a 180 degree swivel hook with an optional magnetic cover.



114301 410239

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
114301	HEMImini™ Work Light	EA	1
410239	Magnetic Cover for HEMImini™ Work Light	EA	1

Flex Light

The Flex Light provides 120 lumens of lighting for tight spaces with the ability to bend 90 degrees backwards and forwards. Designed with flexibility in mind, this light comes with a magnetic base and three AAA batteries.



111131

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111131	Flex Pocket Work Light	EA	8

PIVOT™ mini

The PIVOT™ mini is a light that has a 360° swivel hook with 120 lumens and magnetic back and base. Lights on front and top with three AAA batteries included. Available in yellow or camo.



111115

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111115	PIVOT™ mini Pivoting Work Light	EA	12
111117	PIVOT™ mini Pivoting Work Light, Camo	EA	12

PIVOT™ Tough-Light

The PIVOT™ Tough Light has 150 lumens with a hanging hook and magnetic base. It also has 180 degree pivoting capability with three AAA batteries included.



111123

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111123	PIVOT™ Tough-Light Work Light	EA	8

Cliplight Extends

The Cliplight Extends has 120 lumens at the top and 140 lumens in the front with a pivoting head. The light comes with a telescopic system and magnetic base. Four AAA batteries included.



111130

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111130	Cliplight Extends Work Light	EA	8

HEMIPLUS™ 2

The HEMIPLUS™ 2 has up to 1200 lumens of power (4 hours - full power) with a 4400 mAh lithium-ion rechargeable battery. It includes a metal hook and removable magnetic cover.



114302

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
114302	HEMIPLUS™ 2 Work Light	EA	1

Curve Light

The Curve Light provides 300 lumens of lighting using chip-on board technology. Designed with a curved shape to protect the lens and rubber bumper for durability. It is rugged yet sleek. A hanging hook, magnetic base and three AA batteries are included.



111133

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111133	Curve Heavy Duty Work Light	EA	6

WORK LIGHTING | TOOLS

WORK LIGHTS CONT'D

Clipstrip™ / Clipstrip 2™

Clipstrip™ is a powerful pocket light with 140 lumens and includes a pivoting magnetic clip. It is available in yellow or camo with three AAA batteries included.



111112

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111112	Clipstrip™ Pocket Light	EA	12
111116	Clipstrip™ Pocket Camo Light	EA	12
111118	Clipstrip 2™ Pocket Light	EA	9

Work Light

Just because you could do it with your eyes closed, doesn't mean you should have to. Bring light to the HVAC/R problems at hand so you can do what you do best, solve them.



HMWL1200
hilmar

Product Specifications

Two Power Modes: 1200 Lumens (3 Hrs), 600 Lumens (5 Hrs)

Lithium Ion Rechargeable Battery
Magnetic Stand for Secure Positioning
Adjustable Joints

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMWL1200	Work Light	7" x 7" x 8-1/2"	3.9 lbs.	EA	1

Portable Work Light

You're always on the move but your light source must be steady. Designed to prevent shadows and hotspots, the Portable Work Light offers precise light dispersal for the perfect view of whatever moving target you're hitting.



HMPWL1200
hilmar

Product Specifications

Two Power Modes: 1200 Lumens (4 Hrs), 600 Lumens (8 Hrs)

Wide Circular Beam
Secure Hold
Rechargeable Battery

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMPWL1200	Portable Work Light	10-1/4" x 2" x 1-1/2"	1.35 lbs.	EA	1

Compact Work Light

Bright light. Small work space. Designed to fit in your pocket and stick to metal, you can see whatever you need to with ease when you have this little number.



HMCWL150
hilmar

Product Specifications

150 Lumens Array
3 AAA Batteries Included
Rotating Hook for Hands-Free Use
Magnetic Base for Precise Positioning

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMCWL150	Compact Work Light	5-1/5" x 1-1/2" x 2-1/2"	1.0 oz.	EA	1

Clipstrip™ Aqua

Clipstrip™ Aqua is a waterproof light with 180 lumens and includes a magnetic clip and floats. It is available in yellow and comes with a rechargeable 2200 mAh lithium-ion battery. Sold individually.



111113

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111113	Clipstrip™ Aqua Light	EA	1

Mini Work Light

A little light goes a long way when you're working under a tricky unit. Small but mighty, our Mini Work Light gives you 600 and 1200 lumens for dark and darker conditions.



HMMWL600
hilmar

Product Specifications

Two Power Modes: 600 Lumens (1.5 Hrs), 300 Lumens (3 Hrs)

Magnetic Base
Adjustable Joint For Different Angles
Rechargeable Li-Ion Battery

CATALOG NO.	DESCRIPTION	DIMENSIONS (DIA. X H)	WEIGHT	UOM	ORDER MUL.
HMMWL600	Mini Work Light	3" x 2"	0.3 lbs.	EA	1

Pivoting Work Light

For light here, there and everywhere you want it. The Portable Work Light lets you shine light on the problems at hand ... without the use of your hands. Because let's face it, your hands are busy.



HMPWL240
hilmar

Product Specifications

240 Lumen Array
Pivoting Work Light
Magnetic Attachment Points on Back and Base
3 AA Batteries Included

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMPWL240	Pivoting Work Light	8-1/5" x 2-1/4" x 2"	9.6 oz.	EA	1

Pocket Work Light

You need light and possibly a third hand. That's why we'll skip giving you another thing to hold. The Pocket Work Light lives and works right on your pocket to illuminate any and all things HVAC/R.



HMPWL180
hilmar

Product Specifications

180 Lumens
180° Swivel Magnetic Clip
3 AAA Batteries Included

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMPWL180	Pocket Work Light	6-1/4" x 1" x 3/4"	2.4 oz.	EA	1

COMPONENTS & CONSUMABLES

LINESET COVERS AND FITTINGS

EasyGuard®	150-151
SpeediChannel®	151-154

VENTILATION PRODUCTS

Concentric Vent	155
Duct Booster	155
Duct Smoke Testers	156
Roof Flashings	156
UV Light Sanitizers	156
Concentric Vents	156-157

LINESETS AND FITTINGS

Access Fittings	158-159
Brass Fittings	159-160
Copper Fittings	161-162
Linesets	163
Refrigerant Tubing	164-165

DUCT STRAPS AND HANGING

Cable Ties	165-166
Hanging Wire	166
Metal Duct Strap	167
Plastic Duct Strap	167

TAPES AND SEALANTS

Foam Sealant	167
Sealants	168-169
Tapes	170

INLINE COMPONENTS

Line Taps	171
Driers	172-173
Labeling and Identification	173
Refrigerant Safety Caps	174-175
Tubing Insulation	175-176

HEATING PRODUCTS

CO and Smoke Alarms	177
Gas Connectors	177-178
General Heating Products	179
Heat Resistant Cloth	179
Heating Cables	179
Igniters	179-180
Flame Sensors	180
Iron Fittings	181-182



GENERAL INDUSTRIAL

Abrasive Cloths	182
Batteries	183
Contact Cleaners	183
Degreasers	184
Hand Cleaners	184
Drop Cloths and Surface Protection	184
Lubricants	185-186
Industrial Towels	186
Sheet Metal Screws	186-187
Markers, Paints, and Primers	188

SAFETY AND CONSUMABLES

Coveralls	188
Disposable Gloves	188
Work Gloves	189
Hand Warmers	190
Personal Protection Equipment	190
Disposable Towels	190-191
Shoe Covers	191
Safety Supplies	191
Insect Killers	191

HVAC MAINTENANCE CHEMICALS


Maintenance Chemicals Solution	192-193
Quick Reference Guide	
Coil Cleaners	194-196
System Flushes	196
Leak Detection	197
AC Sealants	198
System Additives	199
Deodorizers	200
Disinfectants	200
Drain Pan Repair	200
Coil Protectant	201
Glycols	201

COMPONENTS & CONSUMABLES | LINESET COVERS AND FITTINGS

EASYGUARD®

EasyGuard®

The DiversiTech EasyGuard® is available in two widths, both in 6-1/2 feet lengths. Includes pack of SpeediClips™. It's made of UV resistant PVC material to resist the elements and provide lasting protection.



EG-D3W EG-D4W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-D3W	3" EasyGuard® - 6-1/2" long	EA	1
EG-D4W	4" EasyGuard® - 6-1/2" long	EA	1

Channel must ship LTL.

Soffit Fittings

Ideal for outdoor applications where the EasyGuard® runs up an exterior wall and enters the house vertically through the soffit. Its large flat surface area easily covers the rough opening cut in the soffit. Furnished in two parts, the Soffit Fitting easily snaps onto the EasyGuard® for a clean installation.



EG-SF3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-SF3W	3" Soffit Fitting	EA	1
EG-SF4W	4" Soffit Fitting	EA	1

90° Inside Elbow

90° inside elbows are used to route the EasyGuard® around an inside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



EG-EB3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-EB3W	3" 90 degree Inside Elbow	EA	1
EG-EB4W	4" 90 degree Inside Elbow, Brown	EA	1

Union Coupling

Used for joining two pieces of EasyGuard® - each cover being the same size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



EG-CP3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-CP3W	3" Union Coupling	EA	1
EG-CP4W	4" Union Coupling	EA	1

T-Joint

Used for creating a tee connection between three pieces of EasyGuard® - all covers being the same size. The tee can be combined with the reducing coupling to join SpeediChannel®s of different sizes. Each tee is individually packed, and is furnished complete with stainless steel screws.



EG-TJ4W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-TJ3W	3" T-Joint	EA	1
EG-TJ4W	4" T-Joint	EA	1

Wall Covers

The EasyGuard® wall cover is used to transition through a wall penetration. The wall sleeve creates a clean hole through the wall and the lineset is covered by the wall cover. Each wall cover is individually packed and includes stainless steels screws to attach the wall cover to the base.



EG-WC3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-WC3W	3" Wall Penetration Cover	EA	1
EG-WC4W	4" Wall Penetration Cover	EA	1

90° Flat Bend

90° flat bends are used to route the EasyGuard® around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.



EG-FB3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-FB3W	3" 90 degree Flat Bend	EA	1
EG-FB4W	4" 90 degree Flat Bend	EA	1

90° Outside Elbow

90° outside elbows are used to route the EasyGuard® around an outside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



EG-EIN3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-EIN3W	3" 90 degree Outside Elbow	EA	1
EG-EIN4W	4" 90 degree Outside Elbow	EA	1

Flex Hose Connection Kit

A flexible hose kit of EasyGuard® that protects the line set from the condensing unit to the wall. Also provides a quick easy connection between two lengths of channel over or around obstacles. The kit comes with everything needed for a clean professional installation.



EG-FH3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-FH3W	3" Flex Hose Connection Kit	EA	1
EG-FH4W	4" Flex Hose Connection Kit	EA	1

Reducer Coupling

Used for joining two pieces of EasyGuard® - each cover being a different size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



EG-TC34W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-TC34W	3" x 4" Reducer Coupling	EA	1

LINESET COVERS AND FITTINGS | COMPONENTS & CONSUMABLES

EASYGUARD® CONT'D

Duct End

The duct end is used to terminate a run of EasyGuard® to a small opening – just large enough for the line set and condensate drain line to pass through. Gives a neat/clean installation.




EG-DE3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-DE3W	3" Duct End	EA	1
EG-DE4W	4" Duct End	EA	1

SPEEDICHANNEL®

SpeediChannel®

The DiversiTech SpeediChannel® is available in three widths, all in 6-1/2 feet lengths. Includes pack of SpeediClips™.



230-D3W 230-D4W 230-D6W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-D3A	3" SpeediChannel®	EA	6
230-D3B	3" SpeediChannel®, Brown	EA	6
230-D3W	3" SpeediChannel®, White	EA	6
230-D4A	4" SpeediChannel®	EA	6
230-D4B	4" SpeediChannel®, Brown	EA	6
230-D4W	4" SpeediChannel®, White	EA	6
230-D6	6" SpeediChannel®	EA	5
230-D6W	6" SpeediChannel®, White	EA	5

Channel must ship LTL.



230-D3B



230-D3A



230-D3W

Adjustable Flat Bend

Adjustable flat bends flex from 45 to 90 degrees and make it easy to route the SpeediChannel® around an obstacle. Each adjustable bend is individually packed and includes stainless steel screws.



230-AFB3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-AFB3	3" Adjustable Flat Bend	EA	10
230-AF-B3W	3" Adjustable Flat Bend, White	EA	10
230-AFB4	4" Adjustable Flat Bend	EA	10
230-AF-B4W	4" Adjustable Flat Bend, White	EA	10

Soffit Fittings

Ideal for outdoor applications where the SpeediChannel® runs up an exterior wall and enters the house vertically through the soffit. Its large flat surface area easily covers the rough opening cut in the soffit. Furnished in two parts, the Soffit Fitting easily snaps onto the SpeediChannel® for a clean installation.



230-SF3 230-SF4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-SF3	3" Soffit Fitting	EA	10
230-SF3W	3" Soffit Fitting, White	EA	10
230-SF4	4" Soffit Fitting	EA	10
230-SF4W	4" Soffit Fitting, White	EA	10

Wall Penetration

Wall sleeves and penetration covers are used to transition from the SpeediChannel® system to a through wall penetration. The wall sleeve creates a neat hole through the wall, and the line set is covered by the wall cover. DiversiTech's wall covers are designed to allow for easy installation - even after the line set has been installed. A unique hooking and fastening arrangement allows for quick and easy installation. Each wall cover is individually packed, and is furnished complete with stainless steel screws to attach the wall cover to the base. Three screws (supplied by others) are needed to fasten the wall cover to whatever type of wall construction the system is being installed on.



230-WC3



230-WS2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-WC3	3" Wall Penetration Cover	EA	10
230-WC3B	3" Wall Penetration Cover, Brown	EA	10
230-WC3W	3" Wall Penetration Cover, White	EA	10
230-WC4	4" Wall Penetration Cover	EA	10
230-WC4B	4" Wall Penetration Cover, Brown	EA	10
230-WC4W	4" Wall Penetration Cover, White	EA	10
230-WC6	6" Wall Penetration Cover	EA	10
230-WC6W	6" Wall Penetration Cover, White	EA	10
230-WS2	2-1/2" Wall Sleeve	EA	10

COMPONENTS & CONSUMABLES | LINESET COVERS AND FITTINGS

SPEEDICHANNEL® CONT'D

90° Flat Bend

90° flat bends are used to route the SpeediChannel® around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.



230-FB3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FB3	3" 90 degree Flat Bend	EA	10
230-FB3B	3" 90 degree Flat Bend, Brown	EA	10
230-FB3W	3" 90 degree Flat Bend, White	EA	10
230-FB4	4" 90 degree Flat Bend	EA	10
230-FB4B	4" 90 degree Flat Bend, Brown	EA	10
230-FB4W	4" 90 degree Flat Bend, White	EA	10
230-FB6	6" 90 degree Flat Bend	EA	10
230-FB6W	6" 90 degree Flat Bend, White	EA	10

90° Long Radius Bend

90° long radius flat bends are used to route the SpeediChannel® around an obstacle. The long radius of the elbow allows a gentle bending radius on the copper line set. Each elbow is individually packed, and is furnished complete with stainless steel screws.



230-LFB4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-LFB3	3" 90 degree Long Radius Bend	EA	10
230-LFB3B	3" 90 degree Long Radius Bend, Brown	EA	10
230-LFB3W	3" 90 degree Long Radius Bend, White	EA	10
230-LFB4	4" 90 degree Long Radius Bend	EA	10
230-LFB4B	4" 90 degree Long Radius Bend, Brown	EA	10
230-LFB4W	4" 90 degree Long Radius Bend, White	EA	10
230-LFB6	6" 90 degree Long Radius Bend	EA	10
230-LFB6W	6" 90 degree Long Radius Bend, White	EA	10

90° Outside Elbow

90° outside elbows are used to route the SpeediChannel® around an outside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



230-EIN3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-EIN3	3" 90 degree Outside Elbow	EA	10
230-EIN3B	3" 90 degree Outside Elbow, Brown	EA	10
230-EIN3W	3" 90 degree Outside Elbow, White	EA	10
230-EIN4	4" 90 degree Outside Elbow	EA	10
230-EIN4B	4" 90 degree Outside Elbow, Brown	EA	10
230-EIN4W	4" 90 degree Outside Elbow, White	EA	10
230-EIN6	6" 90 degree Outside Elbow	EA	10
230-EIN6W	6" 90 degree Outside Elbow, White	EA	10

45° Flat Bend

45° flat bends are used to route the SpeediChannel® around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.



230-FB453

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FB453	3" 45 degree Flat Bend	EA	10
230-FB453B	3" 45 degree Flat Bend, Brown	EA	10
230-FB453W	3" 45 degree Flat Bend, White	EA	10
230-FB454	4" 45 degree Flat Bend	EA	10
230-FB454B	4" 45 degree Flat Bend, Brown	EA	10
230-FB454W	4" 45 degree Flat Bend, White	EA	10
230-FB456	6" 45 degree Flat Bend	EA	10
230-FB456W	6" 45 degree Flat Bend, White	EA	10

90° Inside Elbow

90° inside elbows are used to route the SpeediChannel® around an inside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



230-EB3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-EB3	3" 90 degree Inside Elbow	EA	10
230-EB3B	3" 90 degree Inside Elbow, Brown	EA	10
230-EB3W	3" 90 degree Inside Elbow, White	EA	10
230-EB4	4" 90 degree Inside Elbow	EA	10
230-EB4B	4" 90 degree Inside Elbow, Brown	EA	10
230-EB4W	4" 90 degree Inside Elbow, White	EA	10
230-EB6	6" 90 degree Inside Elbow	EA	10
230-EB6W	6" 90 degree Inside Elbow, White	EA	10

Union Coupling

Used for joining two pieces of SpeediChannel® — each cover being the same size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



230-CP3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-CP3	3" Union Coupling	EA	10
230-CP3B	3" Union Coupling, Brown	EA	10
230-CP3W	3" Union Coupling, White	EA	10
230-CP4	4" Union Coupling	EA	10
230-CP4B	4" Union Coupling, Brown	EA	10
230-CP4W	4" Union Coupling, White	EA	10
230-CP6	6" Union Coupling	EA	10
230-CP6W	6" Union Coupling, White	EA	10

LINESET COVERS AND FITTINGS | COMPONENTS & CONSUMABLES

SPEEDICHANNEL® CONT'D

T-Joint

Used for creating a tee connection between three pieces of SpeediChannel® – all covers being the same size. The tee can be combined with the reducing coupling to join SpeediChannel's different sizes. Each tee is individually packed, and is furnished complete with stainless steel screws.



230-TJ4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-TJ4	4" T-Joint	EA	10
230-TJ4B	4" T-Joint, Brown	EA	10
230-TJ4W	4" T-Joint, White	EA	10
230-TJ6	6" T-Joint	EA	10
230-TJ6W	6" T-Joint, White	EA	10

Reducer Coupling

Used for joining two pieces of SpeediChannel® – each cover being a different size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



230-TC34

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-TC34	3" x 4" Reducer Coupling	EA	10
230-TC34W	3" x 4" Reducer Coupling, White	EA	10
230-TC46	4" x 6" Reducer Coupling	EA	10
230-TC46W	4" x 6" Reducer Coupling, White	EA	10

Cap

Used to cap the end of a SpeediChannel® run. Easily snaps into the end of the SpeediChannel®.



230-DC3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DC3	3" Cap	EA	10
230-DC3W	3" Cap, White	EA	10
230-DC4	4" Cap	EA	10
230-DC4W	4" Cap, White	EA	10
230-DC6	6" Cap	EA	10
230-DC6W	6" Cap, White	EA	10

Flex Joint

An accordion style piece of SpeediChannel®, the flex joint can be extremely flexible routing a SpeediChannel® system around virtually any type of obstacle. Each joint is 20" long and can be combined together for longer flex runs. Unlike competitor systems, the DiversiTech flex joint does NOT require the use of a union coupling. The DiversiTech flex joint slides tightly inside the SpeediChannel® system.



230-FJ3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FJ3	3" Flex Joint	EA	10
230-FJ3W	3" Flex Joint, White	EA	10
230-FJ4	4" Flex Joint	EA	10
230-FJ4W	4" Flex Joint, White	EA	10

Duct End

The duct end is used to terminate a run of SpeediChannel® to a small opening – just large enough for the line set and condensate drain line to pass through. Gives a neat/clean installation.



230-DE3

230-DE4



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DE3	3" Duct End	EA	10
230-DE3B	3" Duct End, Brown	EA	10
230-DE3W	3" Duct End, White	EA	10
230-DE4	4" Duct End	EA	10
230-DE4B	4" Duct End, Brown	EA	10
230-DE4W	4" Duct End, White	EA	10
230-DE6	6" Duct End	EA	10
230-DE6W	6" Duct End, White	EA	10

Flat Wall Escutcheon

Typically used to cover a rough opening in a soffit, wall, or ceiling penetration. One side of the escutcheon is flat to allow for a SpeediChannel® run going along a wall, and penetrating through an adjacent wall or ceiling. This is the most common type of wall penetration. Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel®.



230-FR3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FR3	3" Flat Wall Escutcheon	EA	10
230-FR3W	3" Flat Wall Escutcheon, White	EA	10
230-FR4	4" Flat Wall Escutcheon	EA	10
230-FR4W	4" Flat Wall Escutcheon, White	EA	10
230-FR6	6" Flat Wall Escutcheon	EA	10
230-FR6W	6" Flat Wall Escutcheon, White	EA	10

COMPONENTS & CONSUMABLES | LINESET COVERS AND FITTINGS

SPEEDICHANNEL® CONT'D

Wall Escutcheon

Typically used to cover a rough opening in a wall or ceiling penetration. The hole in the escutcheon is centered to allow for a free standing SpeediChannel® to penetrate through a wall or ceiling. This is the fairly un-common type of wall or ceiling penetration. Check carefully, as you may need the Flat Wall Escutcheon. Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel®.



230-WR3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-WR3	3" Wall Escutcheon	EA	10
230-WR3W	3" Wall Escutcheon, White	EA	10
230-WR4	4" Wall Escutcheon	EA	10
230-WR4W	4" Wall Escutcheon, White	EA	10
230-WR6	6" Wall Escutcheon	EA	10
230-WR6W	6" Wall Escutcheon, White	EA	10

SpeediChannel® Kits

The SpeediChannel® Fitting Kit provides a simple mix of the basic fittings used in a typical SpeediChannel® installation job. Included are one coupling, one wall penetration, one inside elbow, one long radius flat bend, and one pack of ten SpeediClips and 11" cable ties. The 230-IKC3 and 230-IKC4 Installation Kits include three 48" pieces of channel and selected fittings.



230-IKC3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-IKC3	3" SpeediChannel® Installation Kit	EA	1
230-IKC3W	3" SpeediChannel® Installation Kit, White	EA	1
230-IKC4	4" SpeediChannel® Installation Kit	EA	1
230-IKC4W	4" SpeediChannel® Installation Kit, White	EA	1

Roof Inlets

"Roof entrance" adapters for linesets are the ultimate solution for a professional flat roof installation. Manufactured from UV weather resistant plastics or painted aluminum, the Roof Inlet combines a series of features:

- The Roof Inlet body part is equipped with a slope avoiding possible damage to the insulation and preventing kinks into the copper tubes.
- The Roof Inlet base holes allow a steady fixation (depending on the roof surface type and composition).
- The Roof Inlet cap is firmly fixed to the body with stainless steel bolts.



230-INJ465

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-INJ465	SpeediChannel® Roof Inlet – 5" x 5" PVC	EA	1
230-INJ462	SpeediChannel® Roof Inlet – 10" x 5" PVC	EA	1
230-INJ463A	SpeediChannel® Roof Inlet – 3" x 3" PVC	EA	1
230-INJ465A	SpeediChannel® Roof Inlet – 5" x 5" PVC	EA	1
230-INJ462A	SpeediChannel® Roof Inlet – 5" x 10" PVC	EA	1

SpeediChannel® Accessories

A variety of accessories that are complementary or required for installing DiversiTech's SpeediChannel® system.



230-DCLIP-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DCLIP-10	SpeediClip™ and 11" Cable Ties, pack of 10	PK	1
230-DCLIP	SpeediClip™, pack of 50	PK	1
230-DSCREW	SpeediChannel® screws, pack of 100	PK	1

SpeediChannel® Flex Hose Kits

A flexible hose kit of SpeediChannel that protects the line set from the condensing unit to the wall. Also provides a quick easy connection between two lengths of channel over or around obstacles. The kit comes with everything needed for a clean professional installation.



230-FH3-KIT

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FH3-KIT	3" Flex Hose Kit	EA	1
230-FH3W-KIT	3" Flex Hose Kit, White	EA	1
230-FH4-KIT	4" Flex Hose Kit	EA	1
230-FH4-KITW	4" Flex Hose Kit, White	EA	1

Universal Pump Elbow

The Universal Pump Elbow lets an installer use any mini pump of their choice and install it with SpeediChannel. Includes pump elbow and reservoir mounting brackets to fit most mini-split pumps.



230-PFB3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-PFB3	Universal Pump Elbow	EA	1

Line Set Cover Cutter

The 230-CUTTER is designed to easily cut lineset covers that protect linesets and insulations in HVAC applications. The 230-CUTTER has a ratcheting cutting blade that makes cutting lineset covers easy and clean. It has cutting capacity for various duct sizes, ranging from 1.38" x 1.18" up to 3.54" x 2.55".



230-CUTTER

- Easy to open and close
- Cut cleanly with ratcheting blade
- Strong metal body and handle
- Safety hook to keep blade closed
- Lightweight and easy to carry

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-CUTTER	Lineset Cover Cutter	EA	1

VENTILATION PRODUCTS | COMPONENTS & CONSUMABLES

CONCENTRIC VENTS


Concentric Vents

Concentric vents make it easier to have a two pipe installation for high efficiency furnaces. These vents simplify installation and only require one hole through the wall or roof where the pipes terminate. Without using these vents, the installation would require cutting two holes through the home, one for each pipe. These vents save time and money by reducing the amount of work required. Available in 2", 3" or 4" intake vent sizes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CVENT-2	2" Concentric Vent	EA	1
CVENT-2CA	2" Concentric Vent	EA	1
CVENT-3	3" Concentric Vent	EA	1
CVENT-3CA	3" Concentric Vent	EA	1
CVENT-4	4" Concentric Vent	EA	1
CVENTCAP2	Replacement cap for CVENT-2	EA	1
CVENTCAP3	Replacement cap for CVENT-3	EA	1
CVENTCAP4	Replacement cap for CVENT-4	EA	1
CVS-2	Vent screen for CVENT-2	EA	1
CVS-3	Vent screen for CVENT-3	EA	1
CVENT-2AB	Accelerator Bushing for 2" CVENT	EA	1

Concentric Vent Flexible Installation

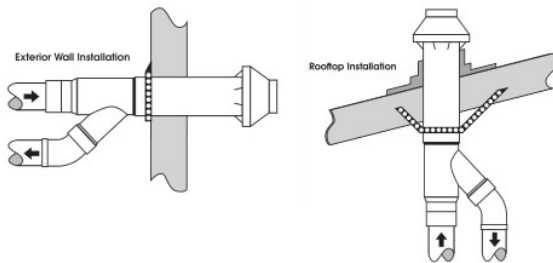

Extended Lengths for Concentric Vents

Concentric vents make it easier to have a two-pipe installation for high efficiency furnaces. These vents simplify installation and only require one hole through the wall or roof where the pipes terminate. Without using these vents, the installation would require cutting two holes through the home, one for each pipe. These vents save time and money by reducing the amount of work required. The extended length of these vents help to maintain clearance above the anticipated snow level to meet local code requirement.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CVENT-2-EXT	2" Concentric Vent Kit, 60" Overall Ext. Length	EA	1
CVENT-3-EXT	3" Concentric Vent Kit, 60" Overall Ext. Length	EA	1

Horizontal Vent Termination Kits

Horizontal vent kits for use in venting high efficiency fossil fuel appliances. The low profile kit hides the vent from view.




CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HVENT-2	Horizontal Termination Kit - 2"	EA	6
HVENT-3	Horizontal Termination Kit - 3"	EA	6
HVENT-2CA	Horizontal Termination Kit - 2" for Canada	EA	6
HVENT-3CA	Horizontal Termination Kit - 3" for Canada	EA	6

DUCT BOOSTERS

Duct Fans

Features electrical junction box for UL and code compliant electrical connection. An efficient way to increase air circulation, keep room temperatures consistent, and lower heating and cooling costs. Metal construction, powerful no-maintenance motors and a one-use thermal fuse mean these fans will be up to the task for years. Straight forward installation into any 120V system with detailed instructions, templates, and diagrams. Available in many sizes. A great way to give slow vents a boost. Conforms to UL STD 507, Certified to CSA STD C22.2 #113

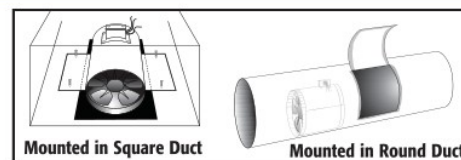

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
625-AF6	Duct Fan 6" dia., 240 CFM, 37W	EA	4
625-AF8	Duct Fan 8" dia., 420 CFM, 37W	EA	4
625-AF10	Duct Fan 10" dia., 650 CFM, 35W	EA	4
625-AF12	Duct Fan 12" dia., 975 CFM, 65W	EA	2
625-AF14	Duct Fan 14" dia., 1350 CFM, 65W	EA	1

COMPONENTS & CONSUMABLES | VENTILATION PRODUCTS

DUCT SMOKE TESTERS

Smokeys

Smoke emitter cartridges provide effective, low cost leak testing of heat exchangers, air ducts, tanks and boilers. Visual air balancing of HVAC systems. Cartridges produce clean, oil free smoke through chemical reaction. Use also for fire drills as well as the placement and testing of smoke alarms/detectors.




14175

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
14145	45 second burn time, 150 cu. ft., pack of 10	PK	1
14175	75 second burn time, 600 cu. ft., pack of 10	PK	1
14250	2-1/2 minute burn time, 1,100 cu. ft., pack of 5	PK	1
14340	4 minute burn time, 2,500 cu. ft., pack of 5	PK	1

ROOF FLASHINGS

No-Caulk Roof Flashing

These No-Caulk Roof Flashings provide a watertight seal for vent pipes. They are available for all common pipe sizes with either a galvanized steel or thermoplastic base. Easy to install. Slides over pipe for pitch to 40° - 45°. Made either of rust-proof, stamped 28 gauge galvanized steel or non-fading, non-cracking rigid black thermoplastic. Non-fading sealing collar. Approved for Type B installations. Do not use paint or petroleum-based products on plastic bases or rubber collar.



5-11830

Oatey

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-11830	Roof Flashing - 1/2" - 3/4" - 1"	EA	12
5-11840	Roof Flashing - 1-1/4" - 1-1/2"	EA	12
5-11853	Roof Flashing - 2"	EA	12
5-11866	Roof Flashing - 3"	EA	12
5-11879	Roof Flashing - 4"	EA	12
530-11908	Roof Flashing, Thermoplastic, 1-1/4" - 1-1/2"	EA	12
530-11909	Roof Flashing, Thermoplastic, 2"	EA	12
530-11910	Roof Flashing, Thermoplastic, 3"	EA	12
530-11911	Roof Flashing, Thermoplastic, 4"	EA	12
530-11919	Roof Flashing, Thermoplastic, 1-1/2" - 3"	EA	12

UV LIGHT SANITIZERS

Pure-Beam™ Ultraviolet Light

Pure Beam™ ultraviolet light is designed for HVAC air disinfection and surface irradiation. The 17 watt UV C lamp is a powerful tool for improved indoor air quality. Installs in the HVAC system or ductwork on either the return or supply air side of the furnace or air handler. DiversiTech's Pure Beam™ ultraviolet light provides a healthier environment in your home, thanks to the germicidal qualities of the UV light spectrum present in the Pure Beam™ light. Ultraviolet light deactivates the DNA of dust mites, bacteria, viruses and other pathogens and destroys their ability to multiply and cause disease. Placement of a Pure Beam™ light in an airstream or near a drain pan can help to decrease the air contamination of any home. Exposure to Pure Beam™ significantly reduces air contamination caused by fungus, mold, and viruses and can cleanse surfaces overcome by mold and slime. Overall size is 14" L x 2" W x 2" H for easy placement. Includes the UV lamp, a UL listed ceramic base, and mounting bracket.



UV-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
UV-1	Ultraviolet Light with 24 VAC elec. ballast	EA	1
UV-BULB	Replacement Bulb - 24V	EA	1

VENTS

Periscope Connection Kit

For tight space duct venting. Contains one male snap lock fitting and one draw band with clamp. Adjustable 17" to 28".



650-020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-020	4" Periscope Kit	EA	9

Metallic Duct – 2 Ply

2 ply metallic duct — aluminum outside, polyester inside. Ideal for bath ducting and all purpose venting.



FM0450

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FM0450	4" x 50' 2 Ply Metallic Duct	EA	1

VENTILATION PRODUCTS | COMPONENTS & CONSUMABLES

VENTS CONT'D

Versa Cap® Flue and Hot Stack Caps

Non-clogging positive draft design, recommended for flue or hot stack installation. Clamp fitting adjustable for all standard sizes. Aluminum model. U.L. Listed.



6-3050



CATALOG NO.	PIPE O.D.	DOUBLE WALL	SINGLE WALL	J-M TRANS. SITE	HEIGHT/ OVERALL DIAMETER	UOM	ORDER MUL.
6-3050	2-7/8" - 5"	3 & 4	3 & 4	3 & 4	4-1/2" x 6-5/8"	EA	12
6-5070	4-7/8" - 7"	5 & 6	5 & 6	5 & 6	4-3/4" x 9-1/2"	EA	12
6-7090	6-7/8" - 9"	7 & 8	7 & 8	7 & 8	5-7/8" x 11-5/8"	EA	12
6-9011	8-7/8" - 11"	9 & 10	9 & 10	9 & 10	6-1/2" x 12-3/4"	EA	6
6-1200	11-7/8" - 14-1/2"	12	12 & 14	12	8-11/16" x 17-9/16"	EA	2

Flue Caps

PVC Flue Caps are an affordable way to protect today's high efficiency furnaces from dirt, moisture and other debris.

- Protection for high efficiency furnaces
- Universal flue cap fits 1.5", 2" and 3" PVC pipe
- Reduces draft inducer motor rust
- Helps to eliminate pressure switch service calls
- Resistant to UV radiation and oxidative degradation
- CSA approved for use in 90% AFUE heating applications



EC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EC-1	E Cap Flue Cap	EA	12

Aluminum Dryer Vent Hoods, Kits, and Fittings

Aluminum vent hood with flange plate.



650-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-001	4" Aluminum Hood	EA	24
650-002	3" Aluminum Hood	EA	24
650-003	4" Hood / 8' Tubing	EA	24
650-038	4" Aluminum Wide Mouth	EA	10

Plastic Wide Mouth Dryer Vent Hood

Hood, aluminum pipe and collar.



650-012

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-031	3" White Hood - Assembled	EA	12
650-012	4" White Hood - Assembled	EA	12
650-013	4" White Hood - Unassembled	EA	18
650-023	4" Brown Hood - Assembled	EA	12

Metallic Duct – 5 Ply

Pure aluminum 5 ply multi layered flexible metallic duct. U.L. 181 Listed. Will contain a fire up to 265°F.



FUL0425

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FUL0425	4" x 25' 5 Ply Metallic Duct	EA	4
FUL0625	6" x 25' 5 Ply Metallic Duct	EA	4

Roof Louver

Unique interior louver design, eliminating the need for a screen. The square hood has been designed for maximum air movement. Large nailing flange for easy installation. U.L. Listed.




6-R50A



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-R50A	Roof Louver - Aluminum	EA	10

Egg Crate Louvers – Air Return Diffusers

White polystyrene 1/2" open cell grid louvers are beneficial for air return.



650-300

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-300	Egg Crate Louvers - 2' x 2' x 1/2"	EA	20
650-200	Egg Crate Louvers - 2' x 4' x 3/8"	EA	15
650-100	Egg Crate Louvers - 2' x 4' x 1/2"	EA	10

Dryer Vent Hose

High quality flexible white vinyl tubing. Available in 3" or 4" diameters. One 50' roll per box.



650-005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-005	Dryer Vent Hose - 3" x 50'	EA	1
650-006	Dryer Vent Hose - 4" x 50'	EA	1

Semi-Rigid Aluminum

8ft. length compressed to 28".



650-011

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-011	4" x 8' Flexible Aluminum Duct	EA	9
650-021	3" x 8' Flexible Aluminum Duct	EA	14
650-074	6" x 8' Flexible Aluminum Duct	EA	3

Dryer Hose Clamps

Available for 3" or 4" dryer vent hose. Steel screw design or convenient spring action design.



650-008

650-010

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-008	Steel Screw Clamp for 4" Hose	EA	50
650-010	Spring Clamp for 4" Hose	EA	500

Louvered Dryer Vent Hood

Louvered vent hoods are available with aluminum pipe and collar or hood only. Ideal for dryer and bathroom fan exhausts.



650-014

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-014	4" Hood Only - White	EA	12
650-016	4" Hood, Pipe and Collar - White (Assembled)	EA	12
650-017	4" Hood, Pipe and Collar - White (Unassembled)	EA	18
650-036	3" Hood, Pipe and Collar - White (Assembled)	EA	12

COMPONENTS & CONSUMABLES | LINESETS AND FITTINGS

ACCESS FITTINGS

Access Fittings

A convenient low-cost port for refrigeration servicing. May be installed in any position on either high or low side for charging, purging, quick testing or pressure checking. DiversiTech's access fittings have 1/4" SAE male flare access ports and include a quick seal cap and a stainless and brass special refrigerant valve core.

CATALOG NO.	DESCRIPTION	CONNECTION	QTY PER PACK	UOM	ORDER MUL.
VA-3-346	3 Way Solder Type, pack of 6	For 3/16" O.D. tube or 1/4" and 3/8" solder fitting	6	PK	1
VA-34	Straight Solder Type, pack of 6	3/16" O.D.S. x 1/4" O.D.F.	6	PK	1
VA-46	Straight Solder Type, pack of 6	1/4" O.D.S. x 3/8" O.D.F.	6	PK	1
VA-68	Straight Solder Type, pack of 6	3/8" O.D.S. x 1/2" O.D.F.	6	PK	1
VAU-24	Half Union, pack of 6	1/8" MPT	6	PK	1
VAU-45	Half Union, pack of 6	1/4" MPT	6	PK	1
VAX-2	Extended Copper Tube	1/8" O.D. tube	6	PK	1
VAX-3	Extended Copper Tube	3/16" O.D. x 1/8" I.D.	6	PK	1
VAX-4	Extended Copper Tube	1/4" O.D. x 3/16" I.D.	6	PK	1
VAX-5	Extended Copper Tube	5/16" O.D. x 1/4" I.D.	3	PK	1
VAX-6	Extended Copper Tube	3/8" O.D. x 5/16" I.D.	3	PK	1
VAX-8	Extended Copper Tube	1/2" O.D.	3	PK	1
VS-4	Swivel Nut w/Depressor, pack of 6	1/4" female flare forged swivel nut	6	PK	1
VST-4	Swivel Tee w/Permanent Depressor, pack of 3	1/4" Access on run x 1/4" female flare w/depressor on female swivel branch end	3	PK	1
VST-44	Swivel Tee w/Perm. Depressor, pack of 3	1/4" Access on run x 1/4" access on "T" - female swivel on run	3	PK	1
VTR-24	Threaded Tee, pack of 3	1/8" MPT x 1/4" male flare on run x access on branch	3	PK	1
VTS-10	Solder Tee Type	5/8" O.D. tube	1	EA	1
VTS-12	Solder Tee Type	3/4" O.D. tube	1	EA	1
VTS-14	Solder Tee Type	7/8" O.D. tube	1	EA	1
VTS-46	Solder Tee Type, pack of 3	1/4" O.D.S. x 5/16" O.D.F.	3	PK	1
VTS-56	Solder Tee Type, pack of 3	5/16" O.D.S. x 3/8" O.D.F.	3	PK	1
VTS-68	Solder Tee Type, pack of 3	3/8" O.D.S.	3	PK	1
VTS-810	Solder Tee Type, pack of 3	1/2" O.D.S.	3	PK	1
VC-4	Flare Cap, pack of 12	1/2" O.D.S.	3	PK	1
VC-4R	Flare Cap w/Core Remover, pack of 12	1/2" O.D.S.	3	PK	1
VVC-1	Valve Core, pack of 6	1/2" O.D.S.	3	PK	1



Brass Adapters

The MSA-45 is used on the new R410 Mini Split systems that have the larger unique fitting on the service valve. The description of that fitting is 1/2" Acme Male-20 UN. This adapter will screw onto the 1/2" Acme Male-20 UN fitting and allow you to connect a standard 1/4 service hose to it.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSA-45	1/4" Male flare x 1/2" - 20 UNF Female	EA	1

LINESETS AND FITTINGS | COMPONENTS & CONSUMABLES

ACCESS FITTINGS CONT'D

Insta-Charge

Faster, safer and more economical method for charging LIQUID refrigerant through the low pressure side of an air conditioning or refrigeration system, without damaging the compressor. Insta-Charge's unique internal restrictor reduces liquid flow to a level below the capacity of the compressor. Converts liquid refrigerant to a saturated vapor for fast entry. Insta-Charge connects directly to the refrigerant can or cylinder valve. Adds liquid tracing dye faster. Eliminates heating of refrigerant cylinder. Made of light weight aluminum. Sold at a fraction of the cost of other fast charging devices.



RC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RC-1	Insta-Charge	EA	1

BRASS FITTINGS

Compression Sleeve



D60A-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D60A-4	1/4" Compression Sleeve	EA	100
D60A-8	1/2" Compression Sleeve	EA	100
D60A-10	5/8" Compression Sleeve	EA	100

Compression Connector



D68A-4B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D68A-4B	1/4" x 1/4" Compression Connector	EA	10
D68A-6C	3/8" x 3/8" Compression Connector	EA	10

Compression Nut



D61A-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D61A-4	1/4" Compression Nut	EA	10
D61A-8	1/2" Compression Nut	EA	10

Compression Elbow



D69A-8D

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D69A-4A	1/4" x 1/8" Compression Elbow	EA	10
D69A-8D	1/2" x 1/2" Compression Elbow	EA	10

Compression Union



D62A-66

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D62A-44	1/4" Compression Union	EA	10
D62A-66	3/8" Compression Union	EA	10
D62A-88	1/2" Compression Union	EA	10
D62A-1010	5/8" Compression Union	EA	10

Compression Tee



D64A-88

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D64A-44	1/4" Compression Tee	EA	10
D64A-66	3/8" Compression Tee	EA	10
D64A-88	1/2" Compression Tee	EA	10
D64A-1010	5/8" Compression Tee	EA	10

Flare x MIP Elbow



DE1-6C

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DE1-4B	1/4" Flare x 1/4" MIP Elbow	EA	10
DE1-6C	3/8" Flare x 3/8" MIP Elbow	EA	10

Flare x MIP Reducing Elbow



DE1-6B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DE1-6B	3/8" Flare x 1/4" MIP Reducing Elbow	EA	10
DE1-6D	3/8" Flare x 1/2" MIP Reducing Elbow	EA	10
DE1-8E	1/2" Flare x 3/4" MIP Reducing Elbow	EA	10
DE1-10D	5/8" Flare x 1/2" MIP Reducing Elbow	EA	10

COMPONENTS & CONSUMABLES | LINESETS AND FITTINGS

BRASS FITTINGS CONT'D

Short Nut



DN1-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DN1-3	3/16" Short Nut	EA	10
DN1-4	1/4" Short Nut	EA	10
DN1-6	3/8" Short Nut	EA	10
DN1-10	5/8" Short Nut	EA	10

Cap



DN5-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DN5-4	1/4" Cap	EA	10
DN5-6	3/8" Cap	EA	10

Short Forged Flare Nut



DNS4-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DNS4-4	1/4" Short Forged Flare Nut	EA	10
DNS4-6	3/8" Short Forged Flare Nut	EA	10
DNS4-8	1/2" Short Forged Flare Nut	EA	10
DNS4-10	5/8" Short Forged Flare Nut	EA	10
DNS4-12	3/4" Short Forged Flare Nut	EA	10
DNS4-14	7/8" Short Forged Flare Nut	EA	5

Plug



DP2-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DP2-4	1/4" Plug	EA	10
DP2-6	3/8" Plug	EA	10
DP2-8	1/2" Plug	EA	10
DP2-10	5/8" Plug	EA	10

Flare x FIP Union



DU3-6C

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DU3-6D	3/8" x 1/2" Flare x FIP Union	EA	10
DU3-10E	5/8" x 3/4" Flare x FIP Union	EA	10

Flare Tee



DT2-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DT2-4	1/4" Flare Tee	EA	10
DT2-6	3/8" Flare Tee	EA	10
DT2-8	1/2" Flare Tee	EA	10
DT2-10	5/8" Flare Tee	EA	5

Flare x MIP Union



DU1-6B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DU1-4B	1/4" Flare x 1/4" MIP Union	EA	10
DU1-6B	3/8" Flare x 1/4" MIP Union	EA	10
DU1-6C	3/8" Flare x 3/8" MIP Union	EA	10
DU1-6D	3/8" Flare x 1/2" MIP Union	EA	10
DU1-6E	3/8" Flare x 3/4" MIP Union	EA	10
DU1-8B	1/2" Flare x 1/4" MIP Union	EA	10
DU1-8D	1/2" Flare x 1/2" MIP Union	EA	10
DU1-8E	1/2" Flare x 3/4" MIP Union	EA	10
DU1-10D	5/8" Flare x 1/2" MIP Union	EA	10
DU1-10E	5/8" Flare x 3/4" MIP Union	EA	10
DU1-12D	3/4" Flare x 1/2" MIP Union	EA	10

Flare Union



DU2-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DU2-4	1/4" Flare Union	EA	10
DU2-6	3/8" Flare Union	EA	10
DU2-8	1/2" Flare Union	EA	10
DU2-10	5/8" Flare Union	EA	10
DU2-12	3/4" Flare Union	EA	10

Flare x Flare Swivel Union



DUS4-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DUS4-4	1/4" Flare x 1/4" Flare Swivel Union	EA	10
DUS4-6	3/8" Flare x 3/8" Flare Swivel Union	EA	10

LINESETS AND FITTINGS | COMPONENTS & CONSUMABLES

COPPER FITTINGS

Male Adapter C x M



C101-0050

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C101-0050	5/8" x 1/2"	1/2" x 1/2"	EA	25
C101-0100	7/8" x 3/4"	3/4" x 3/4"	EA	25
C101-0150	1-1/8" x 1"	1" x 1"	EA	10

Female Adapter C x F



C105-0150

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C105-0057	5/8" x 3/4"	1/2" x 3/4"	EA	25
C105-0100	7/8" x 3/4"	3/4" x 3/4"	EA	25
C105-0150	1-1/8" x 1"	1" x 1"	EA	10
C105-0215	1-3/8" x 1-1/4"	1-1/4" x 1-1/4"	EA	10

90 Degree Ell C x C



C235-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C235-0002	3/8"	1/4"	EA	25
C235-0025	1/2"	3/8"	EA	25
C235-0050	5/8"	1/2"	EA	25
C235-0090	3/4"	5/8"	EA	25
C235-0100	7/8"	3/4"	EA	25
C235-0150	1-1/8"	1"	EA	10
C235-0215	1-3/8"	1-1/4"	EA	10

90 Degree Long Turn Street Ell Ftg. x C



C272-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C272-0002	3/8"	1/4"	EA	25
C272-0025	1/2"	3/8"	EA	25
C272-0050	5/8"	1/2"	EA	25
C272-0090	3/4"	5/8"	EA	25
C272-0100	7/8"	3/4"	EA	10
C272-0150	1-1/8"	1"	EA	10
C272-0215	1-3/8"	1-1/4"	EA	10

90 Degree Street Ell Ftg. x C



C254-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C254-0002	3/8"	1/4"	EA	25
C254-0100	7/8"	3/4"	EA	25
C254-0150	1-1/8"	1"	EA	10

45 Degree Ell C x C



C290-0050

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C290-0002	3/8"	1/4"	EA	25
C290-0025	1/2"	3/8"	EA	25
C290-0050	5/8"	1/2"	EA	25
C290-0090	3/4"	5/8"	EA	25
C290-0100	7/8"	3/4"	EA	25
C290-0150	1-1/8"	1"	EA	10
C290-0215	1-3/8"	1-1/4"	EA	60

90 Degree Long Turn Ell C x C



C242-0025

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C242-0001	1/4"	1/8"	EA	25
C242-0002	3/8"	1/4"	EA	25
C242-0025	1/2"	3/8"	EA	25
C242-0050	5/8"	1/2"	EA	25
C242-0090	3/4"	5/8"	EA	25
C242-0100	7/8"	3/4"	EA	10
C242-0150	1-1/8"	1"	EA	10
C242-0215	1-3/8"	1-1/4"	EA	35
C242-0295	1-5/8"	1-1/2"	EA	25
C242-0390	2-1/8"	2"	EA	12

45 Degree Street Ell Ftg. x C



C295-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C295-0002	3/8"	1/4"	EA	25
C295-0090	3/4"	5/8"	EA	25
C295-0100	7/8"	3/4"	EA	25
C295-0150	1-1/8"	1"	EA	10

COMPONENTS & CONSUMABLES | LINESETS AND FITTINGS

COPPER FITTINGS CONT'D

Coupling (Socket) with Rolled Tube Stop C x C



C165-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C165-0001	1/4"	1/8"	EA	25
C165-0002	3/8"	1/4"	EA	25
C165-0025	1/2"	3/8"	EA	25
C165-0050	5/8"	1/2"	EA	25
C165-0090	3/4"	5/8"	EA	25
C165-0100	7/8"	3/4"	EA	25
C165-0150	1-1/8"	1"	EA	10
C165-0215	1-3/8"	1-1/4"	EA	10
C165-0295	1-5/8"	1-1/2"	EA	60
C165-0390	2-1/8"	2"	EA	40

Reducer Coupling w/Stop C x C



C165-0223

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C165-0007	3/8" x 1/4"	1/4" x 1/8"	EA	25
C165-0032	1/2" x 3/8"	3/8" x 1/4"	EA	25
C165-0058	5/8" x 1/2"	1/2" x 3/8"	EA	25
C165-0093	3/4" x 5/8"	5/8" x 1/2"	EA	25
C165-0107	7/8" x 5/8"	3/4" x 1/2"	EA	25
C165-0149	7/8" x 3/4"	3/4" x 5/8"	EA	25
C165-0159	1-1/8" x 7/8"	1" x 3/4"	EA	10
C165-1498	1-1/8" x 3/4"	1" x 5/8"	EA	10
C165-0222	1-3/8" x 1-1/8"	1-1/4" x 1"	EA	10
C165-0223	1-3/8" x 7/8"	1-1/4" x 3/4"	EA	10
C165-0304	1-5/8" x 1-1/8"	1-1/2" x 1"	EA	10

Copper Coupling w/ Dimple Stop



C170-0003

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C170-0003	5/16"	1/4"	EA	25

Copper Coupling w/No Stop



C172-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C172-0090	3/4"	5/8"	EA	25
C172-0100	7/8"	3/4"	EA	25
C172-0150	1-1/8"	1"	EA	10
C172-0215	1-3/8"	1-1/4"	EA	10

Fitting Reducer Coupling Ftg. x C



C410-0093

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C410-0032	1/2" x 3/8"	3/8" x 1/4"	EA	25
C410-0058	5/8" x 1/2"	1/2" x 3/8"	EA	25
C410-0093	3/4" x 5/8"	5/8" x 1/2"	EA	25
C410-0107	7/8" x 5/8"	3/4" x 1/2"	EA	25
C410-0149	7/8" x 3/4"	3/4" x 5/8"	EA	25
C410-0159	1-1/8" x 7/8"	1" x 3/4"	EA	10
C410-0222	1-1/8" x 1-1/8"	1" x 1"	EA	10

Cap



C154-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C154-0100	7/8"	3/4"	EA	25

U-Type Strap



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C947-0025	1/2"	3/8"	EA	25
C947-0050	5/8"	1/2"	EA	25
C947-0100	7/8"	3/4"	EA	25
C947-0150	1-1/8"	1"	EA	25
C947-0215	1-3/8"	1-1/4"	EA	100
C947-0295	1-5/8"	1-1/2"	EA	100
C947-0390	2-1/8"	2"	EA	50

Tee C x C x C



C460-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C460-0002	3/8"	1/4"	EA	25
C460-0025	1/2"	3/8"	EA	25
C460-0050	5/8"	1/2"	EA	25
C460-0090	3/4"	5/8"	EA	25
C460-0100	7/8"	3/4"	EA	10
C460-0150	1-1/8"	1"	EA	10

P-Traps



C533-0050

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C533-0050	5/8"	1/2"	EA	5
C533-0150	1-1/8"	1"	EA	3

LINESETS AND FITTINGS | COMPONENTS & CONSUMABLES

LINESETS

Linesets

DiversiTech Linesets are individually packaged in sturdy corrugated cardboard, designed and tested for individual parcel shipment. Linesets are designed for air conditioning and refrigeration systems. The copper tube is refrigeration grade tubing to ASTM B280. The suction line is pre-insulated with Armaflex AP pipe insulation. This insulation is a black flexible elastomeric thermal insulation. The expanded closed-cell structure makes it an efficient insulation. It is manufactured without the use of CFC's, HFC's or HCFC's. AP Armaflex contains Microban® antimicrobial product protection for added defense against mold on the insulation. DiversiTech Mini-Split Linesets are similar to Standard Linesets but come with additional insulation on the liquid line and flared line ends. Copper tubing complies with ASTM B280 for Seamless Copper Tube for ACR.

AP Armaflex insulation meets ASTM C534, Type I – Tubular Grade 1, ASTM E84, NFPA 255, UL723, CAN/ULC S102, UL94 5V-5A, V-O (E55798), NFPA 90A/90B, UL181, ASTM G21/C1338, ASTM G22, ASTM D1056 2B1, MIL-P-15280J form T, MIL-C-3133C grade SBE3, MEA 96-85-M, and City of LA RR7642.



D61210250



D40680250B3B6

STANDARD LINESETS

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D61220250	25'	1/2"	3/4"	3/8"	EA	1
D61220300	30'	1/2"	3/4"	3/8"	EA	1
D61220350	35'	1/2"	3/4"	3/8"	EA	1
D61220400	40'	1/2"	3/4"	3/8"	EA	1
D61220500	50'	1/2"	3/4"	3/8"	EA	1
D61230250	25'	3/4"	3/4"	3/8"	EA	1
D61230400	40'	3/4"	3/4"	3/8"	EA	1
D61230500	50'	3/4"	3/4"	3/8"	EA	1
D61280250	25'	3/8"	3/4"	3/8"	EA	1
D61280300	30'	3/8"	3/4"	3/8"	EA	1
D61280350	35'	3/8"	3/4"	3/8"	EA	1
D61280400	40'	3/8"	3/4"	3/8"	EA	1
D61280500	50'	3/8"	3/4"	3/8"	EA	1
D61420250	25'	1/2"	7/8"	3/8"	EA	1
D61420300	30'	1/2"	7/8"	3/8"	EA	1
D61420350	35'	1/2"	7/8"	3/8"	EA	1
D61420400	40'	1/2"	7/8"	3/8"	EA	1
D61420500	50'	1/2"	7/8"	3/8"	EA	1
D61430300	30'	3/4"	7/8"	3/8"	EA	1
D61430350	35'	3/4"	7/8"	3/8"	EA	1
D61430400	40'	3/4"	7/8"	3/8"	EA	1
D61430500	50'	3/4"	7/8"	3/8"	EA	1
D61480250	25'	3/8"	7/8"	3/8"	EA	1
D61480300	30'	3/8"	7/8"	3/8"	EA	1
D61480350	35'	3/8"	7/8"	3/8"	EA	1
D61480400	40'	3/8"	7/8"	3/8"	EA	1
D61480500	50'	3/8"	7/8"	3/8"	EA	1
D61820250	25'	3/8"	1-1/8"	1/2"	EA	1
D61820500	50'	3/8"	1-1/8"	1/2"	EA	1
D61830250	25'	3/4"	1-1/8"	3/8"	EA	1
D61830300	30'	3/4"	1-1/8"	3/8"	EA	1
D61830350	35'	3/4"	1-1/8"	3/8"	EA	1
D61830400	40'	3/4"	1-1/8"	3/8"	EA	1
D61880250	25'	3/8"	1-1/8"	3/8"	EA	1
D61880300	30'	3/8"	1-1/8"	3/8"	EA	1
D61880400	40'	3/8"	1-1/8"	3/8"	EA	1
D61880500	50'	3/8"	1-1/8"	3/8"	EA	1
D61210250	25'	1"	3/4"	3/8"	EA	1
D61210300	30'	1"	3/4"	3/8"	EA	1
D61210350	35'	1"	3/4"	3/8"	EA	1
D61210400	40'	1"	3/4"	3/8"	EA	1
D61210500	50'	1"	3/4"	3/8"	EA	1
D61410250	25'	1"	7/8"	3/8"	EA	1
D61410300	30'	1"	7/8"	3/8"	EA	1
D61410350	35'	1"	7/8"	3/8"	EA	1
D61410400	40'	1"	7/8"	3/8"	EA	1
D61410500	50'	1"	7/8"	3/8"	EA	1
D61810250	25'	1"	1-1/8"	3/8"	EA	1
D61810400	40'	1"	1-1/8"	3/8"	EA	1
D61810500	50'	1"	1-1/8"	3/8"	EA	1

MINI-SPLIT LINESETS

CATALOG NO.	LENGTH (FT)	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D40680250B3B6	25'	3/8"	3/8"	1/4"	EA	1
D40680350B3B6	35'	3/8"	3/8"	1/4"	EA	1
D40680500B3B6	50'	3/8"	3/8"	1/4"	EA	1
D40880250B3B6	25'	3/8"	1/2"	1/4"	EA	1
D40880350B3B6	35'	3/8"	1/2"	1/4"	EA	1
D40880500B3B6	50'	3/8"	1/2"	1/4"	EA	1
D41080250B3B6	25'	3/8"	5/8"	1/4"	EA	1
D41080350B3B6	35'	3/8"	5/8"	1/4"	EA	1
D41080500B3B6	50'	3/8"	5/8"	1/4"	EA	1
D61080250B3B6	25'	3/8"	5/8"	3/8"	EA	1
D61080350B3B6	35'	3/8"	5/8"	3/8"	EA	1
D61080500B3B6	50'	3/8"	5/8"	3/8"	EA	1
D40620250B3B6	25'	1/2"	3/8"	1/4"	EA	1
D40620350B3B6	35'	1/2"	3/8"	1/4"	EA	1
D40620500B3B6	50'	1/2"	3/8"	1/4"	EA	1
D40820250B3B6	25'	1/2"	1/2"	1/4"	EA	1
D40820350B3B6	35'	1/2"	1/2"	1/4"	EA	1
D40820500B3B6	50'	1/2"	1/2"	1/4"	EA	1
D41020250B3B6	25'	1/2"	5/8"	1/4"	EA	1
D41020350B3B6	35'	1/2"	5/8"	1/4"	EA	1
D41020500B3B6	50'	1/2"	5/8"	1/4"	EA	1
D61020250B3B6	25'	1/2"	5/8"	3/8"	EA	1
D61020350B3B6	35'	1/2"	5/8"	3/8"	EA	1
D61020500B3B6	50'	1/2"	5/8"	3/8"	EA	1

If ordering by pallet, 15 line sets are packed per pallet.

Lineset Box™

The Lineset Box is a rough-in box for new construction lineset protection for all types of HVAC installations. The architecturally pleasing and professional looking Lineset Box is easy to install and provides superior protection of refrigerant linesets and condensate drain lines. Provides a clean termination point for new construction projects and reserves the bay for the HVAC system installation. The Lineset Box also protects the lineset from damage during construction. It helps to eliminate damage such as kinks that can drastically increase HVAC installation time.



LSB10-W


CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
LSB10-W	Lineset Box™ - White	EA	1
LSB10-BL	Lineset Box™ - Black	EA	1

COMPONENTS & CONSUMABLES | LINESETS AND FITTINGS

REFRIGERANT TUBING

DiversiTech Tear-Resistant Linesets

Designed for air conditioning and refrigeration systems, the new DiversiTech Tear-Resistant Linesets include a durable flexible polymeric jacket that minimizes insulation damage and easily conforms to bends. Simplifying installation and saving technician time, an expanded closed-cell structure and unique formation resists moisture vapor intrusion and UV damage. No field-applied coating or jacket translates to more installs in a day. Refrigeration grade copper tubing conforms to ATSM B280. These new Tear-Resistant Standard Linesets are available in a wide range of sizes and lengths to serve all standard application requirements.



D612K0250

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D612K0250	25'	1/2"	3/4"	3/8"	EA	1
D612K0300	30'	1/2"	3/4"	3/8"	EA	1
D612K0350	35'	1/2"	3/4"	3/8"	EA	1
D612K0400	40'	1/2"	3/4"	3/8"	EA	1
D612K0500	50'	1/2"	3/4"	3/8"	EA	1
D614K0250	25'	1/2"	7/8"	3/8"	EA	1
D614K0350	35'	1/2"	7/8"	3/8"	EA	1
D614K0400	40'	1/2"	7/8"	3/8"	EA	1
D614K0500	50'	1/2"	7/8"	3/8"	EA	1
D618K0250	25'	1/2"	1-1/8"	3/8"	EA	1
D614K0300	30'	1/2"	1-1/8"	3/8"	EA	1
D618K0400	40'	1/2"	1-1/8"	3/8"	EA	1
D618K0500	50'	1/2"	1-1/8"	3/8"	EA	1
D612L0250	25'	3/4"	3/4"	3/8"	EA	1
D612L0300	30'	3/4"	3/4"	3/8"	EA	1
D612L0350	35'	3/4"	3/4"	3/8"	EA	1
D612L0400	40'	3/4"	3/4"	3/8"	EA	1
D612L0500	50'	3/4"	3/4"	3/8"	EA	1
D614L0250	25'	3/4"	7/8"	3/8"	EA	1
D614L0350	35'	3/4"	7/8"	3/8"	EA	1

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D614L0400	40'	3/4"	7/8"	3/8"	EA	1
D614L0500	50'	3/4"	7/8"	3/8"	EA	1
D618L0250	25'	3/4"	1-1/8"	3/8"	EA	1
D614L0300	30'	3/4"	1-1/8"	3/8"	EA	1
D618L0400	40'	3/4"	1-1/8"	3/8"	EA	1
D618L0500	50'	3/4"	1-1/8"	3/8"	EA	1
D612M0250	25'	1"	3/4"	3/8"	EA	1
D612M0300	30'	1"	3/4"	3/8"	EA	1
D612M0350	35'	1"	3/4"	3/8"	EA	1
D612M0400	40'	1"	3/4"	3/8"	EA	1
D612M0500	50'	1"	3/4"	3/8"	EA	1
D614M0250	25'	1"	7/8"	3/8"	EA	1
D614M0300	30'	1"	7/8"	3/8"	EA	1
D614M0350	35'	1"	7/8"	3/8"	EA	1
D614M0400	40'	1"	7/8"	3/8"	EA	1
D614M0500	50'	1"	7/8"	3/8"	EA	1
D618M0250	25'	1"	1-1/8"	3/8"	EA	1
D618M0300	30'	1"	1-1/8"	3/8"	EA	1
D618M0400	40'	1"	1-1/8"	3/8"	EA	1
D618M0500	50'	1"	1-1/8"	3/8"	EA	1

DiversiTech Tear-Resistant Mini-Split Linesets

Designed for Mini-Split air conditioning systems, DiversiTech offers a new line of Tear-Resistant Linesets that simplify installation and save technician time with no field-applied coating required. A durable polymeric jacket minimizes installation damage and easily conforms to bends, and an expanded closed-cell structure and unique formulation resists moisture vapor intrusion and UV damage. Refrigeration grade copper tubing conforms to ATSM B280. These new Mini-Split Tear-Resistant Linesets are available in a wide range of sizes and lengths. Available with or without fittings.



D406K0250B386



CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D406K0250B3B6	25'	1/2"	3/8"	1/4"	EA	1
D406K0350B3B6	35'	1/2"	3/8"	1/4"	EA	1
D406K0500B3B6	50'	1/2"	3/8"	1/4"	EA	1
D408K0250B3B6	25'	1/2"	1/2"	1/4"	EA	1
D408K0350B3B6	35'	1/2"	1/2"	1/4"	EA	1
D408K0500B3B6	50'	1/2"	1/2"	1/4"	EA	1
D410K0250B3B6	25'	1/2"	5/8"	1/4"	EA	1
D410K0350B3B6	35'	1/2"	5/8"	1/4"	EA	1
D410K0500B3B6	50'	1/2"	5/8"	1/4"	EA	1
D610K0250B3B6	25'	1/2"	5/8"	3/8"	EA	1
D610K0350B3B6	35'	1/2"	5/8"	3/8"	EA	1
D610K0500B3B6	50'	1/2"	5/8"	3/8"	EA	1
D406L0250B3B6	25'	3/4"	3/8"	1/4"	EA	1
D406L0350B3B6	35'	3/4"	3/8"	1/4"	EA	1
D406L0500B3B6	50'	3/4"	3/8"	1/4"	EA	1
D408L0250B3B6	25'	3/4"	1/2"	1/4"	EA	1
D408L0350B3B6	35'	3/4"	1/2"	1/4"	EA	1
D408L0500B3B6	50'	3/4"	1/2"	1/4"	EA	1

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D410L0250B3B6	25'	3/4"	5/8"	1/4"	EA	1
D410L0350B3B6	35'	3/4"	5/8"	1/4"	EA	1
D410L0500B3B6	50'	3/4"	5/8"	1/4"	EA	1
D610L0250B3B6	25'	3/4"	5/8"	3/8"	EA	1
D610L0350B3B6	35'	3/4"	5/8"	3/8"	EA	1
D610L0500B3B6	50'	3/4"	5/8"	3/8"	EA	1
D406M0250B3B6	25'	1"	3/8"	1/4"	EA	1
D406M0350B3B6	35'	1"	3/8"	1/4"	EA	1
D406M0500B3B6	50'	1"	3/8"	1/4"	EA	1
D408M0250B3B6	25'	1"	1/2"	1/4"	EA	1
D408M0350B3B6	35'	1"	1/2"	1/4"	EA	1
D408M0500B3B6	50'	1"	1/2"	1/4"	EA	1
D410M0250B3B6	25'	1"	5/8"	1/4"	EA	1
D410M0350B3B6	35'	1"	5/8"	1/4"	EA	1
D410M0500B3B6	50'	1"	5/8"	1/4"	EA	1
D610M0250B3B6	25'	1"	5/8"	3/8"	EA	1
D610M0350B3B6	35'	1"	5/8"	3/8"	EA	1
D610M0500B3B6	50'	1"	5/8"	3/8"	EA	1

If ordering by pallet, 15 linesets are packed per pallet.

LINESETS & FITTINGS / DUCT STRAPS & HANGING | COMP. & CONSUM.

REFRIGERANT TUBING CONT'D

White Pipe™

White Pipe™ pre-insulated refrigerant line is ideal for a variety of installation jobs and works for every air conditioning application including ductless mini-split, heat pump and centralized air ducted units. Available in a variety of sizes and lengths.



WP-1214-50

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WP1214-50	White Pipe, 1/4" x 1/2" x 50'	EA	13
WP1238-50	White Pipe, 3/8" x 1/2" x 50'	EA	11
WP1212-50	White Pipe, 1/2" x 1/2" in x 50'	EA	10
WP1258-50	White Pipe, 5/8" x 1/2" in x 50'	EA	7
WP1234-50	White Pipe, 3/4" x 1/2" in x 50'	EA	5
WP1278-50	White Pipe, 7/8" x 1/2" in x 50'	EA	5
WP1214-164	White Pipe, 1/4" x 1/2" in x 164'	EA	5
WP1238-164	White Pipe, 3/8" x 1/2" in x 164'	EA	4
WP1212-164	White Pipe, 1/2" x 1/2" in x 164'	EA	4
WP1258-164	White Pipe, 5/8" x 1/2" in x 164'	EA	3
WP1234-82	White Pipe, 3/4" x 1/2" in x 82'	EA	3

CABLE TIES

Heavy Duty Cable Ties

6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct. Tensioning tool for 32 in. plus allows operator to adjust strap to any desired tension.



7-P24

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-P24	24" Long - Fits up to 6" Duct - 175 lb. Tensile	EA	50
7-P36	36" Long - Fits up to 10" Duct - 175 lb. Tensile	EA	50
7-P36B	36" Long - Black - Fits up to 10" Duct - 175 lb. Tensile	EA	50
7-P48	48" Long - Fits up to 14" Duct - 175 lb. Tensile	EA	50
7-P48B	48" Long - Black - Fits up to 14" Duct - 175 lb. Tensile	EA	25
7-L300	Tensioning Tool for 120-175 lb. Ties	EA	1

Black Nylon Cable Tie Assortment

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



62000AX

CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX BUNDLE DIA.	TENSILE STRENGTH	UOM	ORDER MUL.
62000AX	Assortment	7-1/2" 11"	Black Black	1-3/4" 3"	50 lb. 50 lb.	PK	1
WTB11C	Assortment	11"	Black	3"	50 lb.	PK	1

Heavy Duty Nylon Cable Ties

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



6266BLX

CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX BUNDLE DIA.	TENSILE STRENGTH	UOM	ORDER MUL.
6265BLX	Nylon; Heavy-duty, pack of 50	14"	Black	4"	175 lb.	PK	1
6265BCX	Nylon; Heavy-duty, pack of 100	14"	Black	4"	175 lb.	PK	1
6266BLX	Nylon; Heavy-duty, pack of 50	36"	Black	11"	175 lb.	PK	1

Nylon Cable Clamps

These cable clamps are perfect for securing wire or pipes.



5384


CATALOG NO.	DESCRIPTION	FITS PIPE OUTER DIA.	THICK-NESS	WIDTH	UOM	ORDER MUL.
5381	Nylon Cable Clamps, pack of 54	1/8"	.050"	3/8"	PK	1
5382	Nylon Cable Clamps, pack of 48	1/4"	.050"	3/8"	PK	1
5383	Nylon Cable Clamps, pack of 41	3/8"	.050"	3/8"	PK	1
5384	Nylon Cable Clamps, pack of 35	1/2"	.050"	3/8"	PK	1
5385	Nylon Cable Clamps, pack of 21	5/8"	.060"	1/2"	PK	1
5380AX	Assortment	1/8"-1"			EA	1

COMPONENTS & CONSUMABLES | DUCT STRAPS AND HANGING

CABLE TIES CONT'D

Nylon Cable Ties

Black Cable ties are weather and UV resistant. Items in this section are UL listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX BUNDLE DIA.	TENSILE STRENGTH	UOM	ORDER MUL.
6267MX	Nylon Cable Ties, pack of 1,000	4"	Natural	13/16"	18 lb.	PK	1
6261CX	Nylon Cable Ties, pack of 100	6"	Natural	1-3/8"	18 lb.	PK	1
6261BCX	Nylon Cable Ties, pack of 100	6"	Black	1-3/8"	18 lb.	PK	1
6268BMX	Nylon Cable Ties, pack of 1,000	6"	Black	1-3/8"	30 lb.	PK	1
6262LX	Nylon Cable Ties, pack of 50	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262CX	Nylon Cable Ties, pack of 100	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262MX	Nylon Cable Ties, pack of 1,000	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262BLX	Nylon Cable Ties, pack of 50	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BCX	Nylon Cable Ties, pack of 100	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BMX	Nylon Cable Ties, pack of 1,000	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6263LX	Nylon Cable Ties, pack of 50	11"	Natural	3"	50 lb.	PK	1
6263CX	Nylon Cable Ties, pack of 100	11"	Natural	3"	50 lb.	PK	1
6263DX	Nylon Cable Ties, pack of 500	11"	Natural	3"	50 lb.	PK	1
6263BLX	Nylon Cable Ties, pack of 50	11"	Black	3"	50 lb.	PK	1
6263BCX	Nylon Cable Ties, pack of 100	11"	Black	3"	50 lb.	PK	1
6263BDX	Nylon Cable Ties, pack of 500	11"	Black	3"	50 lb.	PK	1
60265LX	Nylon Cable Ties, pack of 50	14"	Natural	4"	50 lb.	PK	1
60265BLX	Nylon Cable Ties, pack of 50	14"	Black	4"	50 lb.	PK	1

HANGING WIRE

Hanging Wire

The 18 gauge galvanized can be used to hang HVAC duct work.



710-182G

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-182G	2# Roll - 330' - 18 Gauge Galvanized	EA	8
710-185G	5# Roll - 830' - 18 Gauge Galvanized	EA	8

Cable Tie Mounts

Approximately 1" square adhesive backed. These mounts can be mounted with a screw and will accept up to 75 lb. ties.



6269

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6269	Cable Tie Mounts; 1" square; adhesive backed, pack of 11	PK	1
6269LX	Cable Tie Mounts; 1" square; adhesive backed, pack of 50	PK	1
6269MX	Cable Tie Mounts; 1" square; adhesive backed, pack of 1,000	PK	1

Nylon Cable Ties with Mounting Hole

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



60264CX

60264BCX

CATALOG NO.	DESCRIPTION	MTG. HOLE	LENGTH	COLOR	MAX BUN. DIA.	TENSILE STRGTH.	UOM	ORDER MUL.
60264CX	Tie w/mtg. hole, pack of 100	#8	6"	Natural	1-3/8"	30 lb.	PK	1
60264BCX	Tie w/mtg. hole, pack of 100	#8	6"	Black	1-3/8"	30 lb.	PK	1
6264LX	Tie w/mtg. hole, pack of 50	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264CX	Tie w/mtg. hole, pack of 100	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264BCX	Tie w/mtg. hole, pack of 100	#10	7"	Black	1-3/4"	50 lb.	PK	1
60263CX	Tie w/mtg. hole, pack of 100	#10	11"	Natural	3"	50 lb.	PK	1
60263BLX	Tie w/mtg. hole, pack of 50	#10	11"	Black	3"	50 lb.	PK	1
60263BCX	Tie w/mtg. hole, pack of 100	#10	11"	Black	3"	50 lb.	PK	1

Cable Tie Tensioning Tool

The hilmor Cable Tie Tensioning Tool can relieve the stress of the job. It seamlessly tightens heavy and lightweight cable, and cuts excess material with its easy-to-use lever.



1891190

Features & Benefits

Versatility: Works with both light and heavy-duty nylon cable ties.

Clean Cut: Easy-to-use cutting lever allows for flush cutting of excess material.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	UOM	ORDER MUL.
1891190	Cable Tie Tensioning Tool	7-5/8" x 3-7/8" x 5/8"		

DUCT STRAPS & HANGING / TAPES AND SEALANTS | COMP. & CONSUM.

METAL DUCT STRAPS

Strapping Hanger Iron

Galvanized 3/4 in. vent strapping, hanger iron, plumber's tape, pipe hanger tape and many other uses. 1/4 in. centers for bolts or nails.



710-A1710

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-A1710	Hanger Iron (Galv.) - 10" Rolls - 28 Gauge	EA	50
710-A1650	Hanger Iron (Galv.) - 50" Rolls - 28 Gauge	EA	10
710-A16100	Hanger Iron (Galv.) - 100" Rolls - 28 Gauge	EA	6

Plastic Hanger Strap

Flexible, non-conductive. 3/4" wide x .050" thick. Load tested to 120 lbs.



710-P100

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-P100	3/4" x 100' Roll	EA	20

Duct Strap – Metallic – Roll

Galvanized duct strap in a convenient cardboard dispenser is not only easy to drill or nail, but also solid strapping. Plenum rated.



710-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-001	Metallic Duct Strap - 26 Gauge - 1" x 100'	EA	1
710-002	Metallic Duct Strap - 30 Gauge - 1" x 100'	EA	1
710-003	Metallic Duct Strap - 30 Gauge - 1-1/2" x 100'	EA	1
710-004	Metallic Duct Strap - 26 Gauge - 1-1/2" x 100'	EA	1
710-005	Metallic Duct Strap - 22 Gauge - 1" x 100'	EA	1

PLASTIC DUCT STRAPS

Plenum Duct Strap – UL Rated

Woven Polypropylene Hanging Straps meet the UL 2043 requirement and are suitable for use in air handling spaces. They have a high tensile strength of 400 lbs minimum and 460 lbs maximum. These straps are resistant to both abrasion and chemicals. They are easy to cut and staple to joists.



710-104

- Plenum rated, meets UL 2043 requirement
- High tensile strength
- Resistant to abrasion and chemicals
- Lightweight & easy to cut and staple

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-104	Plenum Duct Strap, Woven, 1-3/4" x 100 Yards - Black UL	EA	24
710-105	Plenum Duct Strap, Woven, 1-3/4" x 100 Yards - Silver UL	EA	24
710-106	Plenum Duct Strap, Woven, 3" x 100 Yards - Black UL	EA	8

Duct Strap – Woven Polypropylene

Webbed duct strap possessing high tensile and abrasion resistance. This can be used for flex duct as it is easy to cut and staple to joists. The product is chemical resistant and tested to meet UL Standard 2043. 710-104 through 710-106 are UL rated.



710-100

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-100	Duct Strap - 1-3/4" x 100 Yards - Black	EA	24
710-101	Duct Strap - 1-3/4" x 100 Yards - Silver	EA	24
710-102	Duct Strap - 3" x 100 Yards - Black	EA	8
710-103	Duct Strap - 3" x 100 Yards - Silver	EA	8

FOAM SEALANT

Foam Sealant

One component closed-cell expanding polyurethane foam sealant for lineal caulking applications. Air-moisture cure. Tack free in 20 minutes; fully cured in 12 hours. Paintable. Use for insulating and sealing around windows, doors, pipes, ducts and vents. Non-toxic when cured. Paint to protect from UV exposure. "R" value 4.7 (1" thickness). Foam contains fire retarding chemical and is U.L. Listed but not rated as a firestop product. Environmental concerns have led us to replace CFC's and HCFC's with hydrocarbon material in our one component foam products. See instructions on each product to ensure safe use and quality results.



01714



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
01714	Foam Sealant – 12 oz. Can – Yields 275' (3/8" bead)	EA	12
01724	Foam Sealant – 20 oz. Can – Yields 460' (3/8" bead)	EA	12

COMPONENTS & CONSUMABLES | TAPES AND SEALANTS

SEALANTS

Wagner Adhesive Sealant

For refrigerant sealing. Eliminates fastener loosening, leakage, and corrosion. Cures between thread flanks to seal against leakage and prevents thread corrosion. Offers sealing with maximum solvent resistance to the action of refrigerant (11, 12 and 22), ammonia and sulfur dioxide. Withstands corrosive liquids used in metal finishings and process industries. Ideal sealant for refrigeration, A/C, and process equipment using corrosive chemicals.



CAS-2712

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CAS-2712	Wagner Adhesive Sealant - 0.34 fl. oz.	EA	12

Fast Cure Epoxy

An easy-to-use, two part putty you simply mix and mold like clay. No complicated weighing or measuring required. Easy 1:1 cut-what-you-need mix ratio. Form it into any shape. It hardens in one hour and makes a final, steel-hard cure in 12 hours and can be sanded, drilled, machined, sawed and painted. Use on metal, wood, brick, stone, concrete, fiberglass, porcelain, tile and most plastics. Cures under water. 1.0 lb.



DEP8001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DEP8001	Gray Epoxy Putty - 1 lb. Kit	EA	24
DEP8002	White Epoxy Putty - 1 lb. Kit	EA	24

Flexi-Patch™

Flexi-Patch™ is an easy to use flexible repair patch ideal for repairing almost any surface. It cures quickly using only UV light from sunlight or a UV flashlight for a long lasting, permanent repair. Flexi-Patch is a fiberglass-reinforced polyester ideal for use on PVC, plastics, metal, wood, concrete and more. It's the easy way to permanently patch almost any surface. It dries hard for permanent repair. Can be drilled, tapped and painted once dry.



FP-36

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FP-36	Flexi-Patch fiberglass patch	EA	20

Sure-Stick Heavy Duty Adhesive Spray

Wide web spray adhesive ideal for both temporary or permanent bonding. Waterproof, transparent and non-staining. Use for the toughest adhesive applications with leather, cardboard, most plastics, polyethylene sheeting and insulation in HVAC applications. Cleans with mineral spirits. Not for use on vinyl.



315-20

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
315-20	Sure-Stick Adhesive Spray	EA	12

Thread Sealant with PTFE

General purpose sealant with the lubricity of PTFE for metal pipes. Won't shred like PTFE Tape. Allows easy disassembly. Resists common shop fluids. 60° to 400°F temp. resistance.



7-80632

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-80632	Thread Sealant - 1/4 Pint Brush Can	EA	12
7-80633	Thread Sealant - 1 Pint Brush Can., 12 per pack	EA	12

Super Glue

This adhesive can be used on dirty, greasy surfaces and the medium viscosity penetrates into preassembled and close fitting parts. It can be used on aluminum, metal, rubber, and most plastics for most tough jobs.



DEP052

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DEP052	Super Glue - 2 Gram Tube	EA	12

Firestop Products for Class A Buildings

U.L. Classified. Code Approved. Seal penetrations of plumbing, refrigeration and AC lines, ducts, vents and electrical cable through fire-rated floors, walls and ceilings. Easy-to-use, non-shrinking, non-toxic and permanently flexible. Blocks fire, gas, smoke, air and water migration. Use ceramic fiber filler together with putty or caulk for thick penetrations. Technical bulletins available.



16491



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
16491	Firestop Caulk - Red - 10.3 fl. oz. cartridge	EA	12

Caulk Gun

Caulk guns can be used to hold the sealant to seal duct work.



7-100



7-200

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-100	Caulk Gun - Super Ratchet Type	EA	12
7-200	Caulk Gun - Standard Duty	EA	1

DiversiGum Sealing Compound

Non-hardening, gray compound. For plugging openings through foundations or around refrigeration tube entry.



6-202-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-202-1	DiversiGum Sealing Compound - 1 lb. Slug	EA	24
6-202-2	DiversiGum Sealing Compound - 2 lb. Slug	EA	20
AG-25	DiversiGum Sealing Compound - 3/8" x 25" Caulking Cord	EA	12

TAPES AND SEALANTS | COMPONENTS & CONSUMABLES

SEALANTS CONT'D

High Temp Red Silicone Sealant

A one part non-slumping paste that cures to a tough, rubbery solid at room temperature. Formulated to perform at temperatures ranging from -85°F to 500°F for continuous operation, and to 600°F for intermittent exposure. Tack free cure time – 15 minutes. Full cure time – 24 hours.



7-4300

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-4300	High Temp Red Silicone Sealant - 10.1 oz. Cartridge	EA	12

25 Year Acrylic Latex Painter's Caulk

For both interior and exterior use. DiversiTech's 25 Year Acrylic Latex Painter's Caulk forms a tough, paintable resilient bond to all building material surfaces. Excellent resistance to water, weathering and moisture vapor.



7-4500

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-4500	White Acrylic Latex Caulk - 10.1 oz. Cartridge	EA	12

Pro-Air Industrial Grade Spray Adhesive

A clear, pressure sensitive aerosol adhesive with exceptional tack and shear strength characteristics. An excellent choice for most permanent adhesive applications: duct liner and wrap, sheet aluminum, fiberglass insulation board, and much more. The aerosol package offers a specially designed web spray pattern for even, controlled distribution. Flammability meets aerosol flame extension test requirements. Coverage is approximately 90-100 square feet per pound.



GP1-40BL



GN-23H

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GP1-40BL	Pro-Air Spray Adhesive - 38 lb. Disposable Cylinder	EA	1

Silicone Sealant

Food grade 100% RTV Silicone Sealant. Can be used in applications for continuous use to 450°F. UV and water resistant. Long-term flexibility. Non-paintable. Available in 10.3 fl. oz. tube for use in standard caulk gun or in 3 fl. oz. squeeze tube.



7-4000

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-4000	Clear Silicone Sealant - 10.3 fl. oz. Tube	EA	12
7-4001	Clear Silicone Sealant - 3 fl. oz. Squeeze Tube	EA	48
7-4100	White Silicone Sealant - 10.3 fl. oz. Tube	EA	12
7-4200	Aluminum Silicone Sealant - 10.3 fl. oz. Tube	EA	12
7-80045	Pipe Joint Compound - 6 fl. oz. Tube	EA	12

Pro-Air Duct Sealant – UL 181 AM-BM Listed

Water-based fiber-reinforced white duct sealant/mastic formulated for indoor/outdoor use. Meets U.L. Class 1 rating and local codes while featuring long term flexibility and strength. Use on metal heating, ventilating, and A/C duct systems; as well as fiberglass duct board systems and flex duct systems. Recommended for use to 10" of water column pressure without the need for fiberglass mesh reinforcement.



800-008

800-009

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
800-008	Pro-Air Duct Sealant - 1/10 Gallon Tube - 10.5 oz.	EA	12
800-009	Pro-Air Duct Sealant - 1 Gallon	EA	12

Black Jack® Roof Cement

Black Jack® All-Weather Roof Cement is an asphalt based patching compound designed to repair cracks, splits, seams and holes in roofing materials. It also works great in new construction and in setting flashings, drip edges and roofing material edges.

- Use in wet or dry conditions
- Seals flashings, and other roof projections
- Fiber reinforced
- Thick trowel grade



RM-10



RM-1G

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RM-10	Black Jack® All Weather Roof Cement - 10 oz. Tube	EA	6
RM-1G	Black Jack® All Weather Roof Cement - 1 Gallon	EA	6

COMPONENTS & CONSUMABLES | TAPES AND SEALANTS

TAPES

Stick-E-Tape

Self adhesive aluminum tape with temperature range of 40°F to 200°F. Easily painted. Excellent vapor barrier; effective UV and water shield over urethane foam. Preferred duct and pipe wrap.



50302

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
50302	Stick-E-Tape - AFT-701-2 - 2" x 50' Roll	EA	24

Flex Duct Tape

Specially designed to meet new UL181B FX code for flex duct. Higher adhesion and tack than traditional cloth duct tapes. Conformable, hand tearable foil; 3 mil thickness. 2 in. x 120 yds. Code identification printed on the tape. Acrylic adhesive for superior performance in extreme environments. (35°F to 260°F)



640-FD2S

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-FD2S	Flex Duct Tape - Silver - 2"	EA	24
640-FD2B	Flex Duct Tape - Black - 2"	EA	24
640-FD3S	Flex Duct Tape - Silver - 3"	EA	16

UL Listed Foil Tape

Unique acrylic adhesive for airtight bonds on joints and seams of fiberglass duct systems. Flexible, easy to use. Meets or exceeds performance standard AFLS 100 73 and UL 181 A P.



640-UL25

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-UL25	UL 181 Listed Foil Tape - 2-1/2" - 60 Yards	EA	16
640-UL3	UL 181 Listed Foil Tape - 3" - 60 Yards	EA	16

Yellow PTFE Thread Seal Tape

Oatey® Yellow Gas Line PTFE Thread Seal Tape is designed and manufactured for natural gas, propane, butane, water, oil and chemical lines. It is heavier than white tape with density of 1.35-1.50 grams/cubic centimeters, 4 mils thick. It complies with MIL-T-22230A (ASG), UL 31 RO, AGA 3226 and CAN/ULC-S642.



513-31403D

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
513-31403D	Yellow PTFE Thread Seal Tape, 1/2" x 260"	EA	1

Tape

Vinyl electrical tape. Part 5255 holds up to 7 pounds per square inch when attached to steel surface.



5255

CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MUL.
5255	Vinyl Electric Tape	3/4" x 60'	EA	1

Aluminum Foil Tape

Prevents heating and cooling losses. Blocks odors and moisture. Easy to handle. Use for HVAC and refrigeration systems. 35°F to plus 260°F working temperatures. 3-5 year shelf life. Made in USA.



640-AF2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-AF2	2" Aluminum Foil Tape - 50 yds.	EA	24
640-AF25	2-1/2" Aluminum Foil Tape - 50 yds.	EA	20
640-AF3	3" Aluminum Foil Tape - 50 yds.	EA	16

Foil Scrim Kraft Tape

Non-tearable, diamond patterned backing with an aggressive rubber based adhesive system for consistently dependable performance. Made in the USA.



640-FSK2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-FD2S	Flex Duct Tape - Silver - 2"	EA	24
640-FD2B	Flex Duct Tape - Black - 2"	EA	24

Cloth Duct Tapes

High tack, excellent strength. Superior performance in sealing air handling systems. Heavy cloth content for easier tearing and additional strength. Made in the USA.



PC-622-S

PC-622-B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PC-622-S	2" x 60 Yards- Premium Grade Duct Tape - Silver	EA	24
PC-622-B	2" x 60 Yards - Premium Grade Duct Tape - Black	EA	24
PC-609-S	2" x 60 Yards - Industrial Grade Duct Tape - Silver	EA	24
PC-609-B	2" x 60 Yards - Industrial Grade Duct Tape - Black	EA	24
PC-600-S	2" x 60 Yards - Contractor Grade Duct Tape - Silver	EA	24
PC-600-B	2" x 60 Yards - Contractor Grade Duct Tape - Black	EA	24
PC-857	2" x 60 Yards - Metallized UL181B-FX Flex Duct Tape	EA	24

Teflon® Tape

This PTFE Tape is made of non toxic, pure white PTFE. The tape can be used with chemicals, solvents, oxygen, and on food lines. The product can withstand up to 2000 psi of pressure.



5246

CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MUL.
5246	Teflon® Thread Seal Tape	1/2" x 520"	EA	1

INLINE COMPONENTS | COMPONENTS & CONSUMABLES

LINE TAPS

Quick-Tap

Features a valve core in the 1/4" male port. Simply pierce the line and back seat the needle. Flow starts when depressor type charging hose is connected. Flow shuts off automatically when hose is removed. If valve core is not desired, it may be removed. Connect hose, pierce line and back seat needle. This method offers full unrestricted flow. Valve core can be removed or changed at any time without loss of refrigerant if needle is front seated.



QT-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QT-1	Quick-Tap - 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QT-2	Quick-Tap - 1/2", 5/8" O.D. Tube Size	EA	1

MAC - The Ultimate In-Line Piercing Valves

Install valve. Connect charging hose. Service. That's all there is to it! MAC features uniport: 1 connection for piercing and servicing. Sealed with refrigerant resistant "O" rings. Needle automatically back seats after servicing, leaving line free of restriction. Connect to tubing with 2 socket-head screws. (Hex wrench is included with each valve.) Needle depressor is inserted into head of needle. Wing cap is turned down easily by hand until line is pierced. Wing cap is removed and system may be serviced with any charging hose with built-in depressor. When hose is removed, spring loaded needle back-seats forming a leak proof seal. Needle depressor is discarded and wing cap forms extra precautionary seal.



QTM-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QTM-1	MAC Line Piercing Valve - 1/4", 5/16", 3/8" O.D. Tube Size	EA	36
QTM-2	MAC Line Piercing Valve - 1/2", 5/8" O.D. Tube Size	EA	36

Copper Saddle Valve

For copper-to-copper brazing. Penetrates line in one easy operation with no holes to drill. Steel pin with valve core pierces line and is locked into valve body by tightening cap. Teflon ring assures positive seal. Available in sizes from 1/4" to 1-1/8".



VLC-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VLC-4	Copper Saddle Valve - 1/4" O.D. Tube Size, pack of 6	PK	1
VLC-5	Copper Saddle Valve - 5/16" O.D. Tube Size, pack of 6	PK	1
VLC-6	Copper Saddle Valve - 3/8" O.D. Tube Size, pack of 6	PK	1
VLC-8	Copper Saddle Valve - 1/2" O.D. Tube Size, pack of 4	PK	1
VLC-10	Copper Saddle Valve - 5/8" O.D. Tube Size, pack of 3	PK	1
VLC-12	Copper Saddle Valve - 3/4" O.D. Tube Size, pack of 2	PK	1
VLC-18	Copper Saddle Valve - 1-1/8" O.D. Tube Size, pack of 2	PK	1
VLC-25	Additional Teflon Rings, pack of 25	PK	1

Quick-Tap-2

Identical to Quick-Tap except that a nylon handle replaces the hex wrench. Phillips-head screws are used.



QTH-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QTH-1	Quick-Tap-2 - 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QTH-2	Quick-Tap-2 - 1/2", 5/8" O.D. Tube Size	EA	1

Insta-Tap Refrigerant Recovery Tool

The fastest, easiest way to evacuate refrigerant before disposal of a unit. Snaps onto refrigerant line for full and immediate flow. Punctures super large hole for maximum full flow discharge to recovery unit. One tool fits all sizes from 3/16" to 7/8" O.D. hard tubing. Replaceable needle.



QT-100

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QT-100	Quick-Tap-2 - 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QT-100N	Replaceable Hardened Steel Needle and Gasket	EA	1
QT-100G	Replacement Gasket Only	EA	3

Core Storer

All steel valve core remover and storage container. Completely knurled for easier grip, eliminating slippage when using with oily or greasy hands. Core Storer features a compartment for storing extra valve cores. Four replacement cores are included with each tool.



VCR-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VCR-1	Core Remover and Storer	EA	1

Core Removal Tool

Designed to remove and replace valve cores without losing the refrigerant charge. Connects to any 1/4" male flare fitting. Saves time, saves refrigerant.



VCRT-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VCRT-1	Core Removal Tool	EA	1

COMPONENTS & CONSUMABLES | INLINE COMPONENTS

DRIERS

Liquid Line Driers

High moisture and acid capacity. Maximum filtration capacity. Exceptional compatibility with all existing and new refrigerants and blends including 134a, 401A/B, 402A/B, 404A, 407A/B/C, 410A, 502, 507A. Spring loaded, molecular sieve XH-9 dessicant. Solid copper sweat fittings. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion. Eliminates concern of additive stripping.



DAD052

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DAD032	WLD-032 FLARE	1/4"	3"	EA	1
DAD032S	WLD-032 SWEAT	1/4"	3"	EA	1
DAD052	WLD-052 FLARE	1/4"	5"	EA	1
DAD052S	WLD-052 SWEAT	1/4"	5"	EA	1
DAD053S	WLD-053 SWEAT	3/8"	5"	EA	1
DAD082	WLD-082 FLARE	1/4"	8"	EA	1
DAD082S	WLD-082 SWEAT	1/4"	8"	EA	1
DAD083S	WLD-083 SWEAT	3/8"	8"	EA	1
DAD084S	WLD-084 SWEAT	1/2"	8"	EA	1
DAD163	WLD-163 FLARE	3/8"	16"	EA	1
DAD163S	WLD-163 SWEAT	3/8"	16"	EA	1
DAD164S	WLD-164 SWEAT	1/2"	16"	EA	1
DAD303	WLD-303 FLARE	3/8"	30"	EA	1
DAD303S	WLD-303 SWEAT	3/8"	30"	EA	1
DAD304S	WLD-304 SWEAT	1/2"	30"	EA	1
DAD305	WLD-305 FLARE	5/8"	30"	EA	1

Suction Line Driers

The solid-core clean-up dryer was developed for use in a system suction line. The compact design incorporates a large outside diameter shell, which results in a shorter lay-in length, and a larger core, which provides a greater filtration area for maximum operating efficiency. The core material has controlled porosity which effectively removes and holds a maximum amount of contaminants with a minimum of pressure drop. It collects and holds inorganic acids and other harmful contaminants from a motor burnout. This binding process protects the core from acid decomposition. Access valves on both the inlet and outlet sides make it easy to measure pressure accurately. Occasionally, enough contaminant matter may collect in the filter core to cause a slight pressure drop. The access valves on the SLD make it easy to determine if a pressure drop exists and to measure the amount of the drop. The original DSLD, solid core, XH-9 molecular sieve dessicant suction line filter dryer. High acid capacity. Low pressure drop – exceptionally high flow rates. Designed for system clean-up. 500 hours salt spray protection. Shortest system cut-out lengths allow installation in tight areas. Two access valves simplify pressure drop measurement. Flare or solid copper sweat fittings.



DSL13-5SVHH

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DSL13-5SVHH	AL-24-55C SWEAT	5/8"	13"	EA	1
DSL13-6SVHH	AL-30-6SC SWEAT	3/4"	13"	EA	1
DSL27-7SVHH	AL-30-7SC SWEAT	7/8"	27"	EA	1
DSL27-9SVHH	AL-44-9SC SWEAT	1-1/8"	27"	EA	1

Universal Spun Copper Driers

Manufactured with the latest generation molecular sieves compatible with more than 20 different types of refrigerants, including R-134A. They can be used in all hermetic and open refrigeration systems using CFC, HCFC and HFC gases and mixes such as commercial and domestic refrigerators, freezers and air conditioners ranging from 1/8 to 2.0 HP. Hermetically sealed with extended ends.

CATALOG NO.	OUTLET	INLET	DIAMETER	LENGTH GRAMS	DESSICANT R12	RECOMM. R22	TONNAGE QUANTITY	UOM	ORDER MUL.
DX-3	1/4"	1/4"	3/4"	7-11/16"	10	1/3	1/2	EA	24
DX-4	Multiple	1/4"	1"	9"	18	3/4	1-1/2	EA	1
DXA-5	1/4"	1/4"	1"	9-1/4"	20	3/4	1-1/2	EA	1



DX-3

DX-4

DXA-5

INLINE COMPONENTS | COMPONENTS & CONSUMABLES

DRIERS CONT'D

Bi Flow Driers

The "DBF" Series is designed specifically for heat pump or reverse cycle application. External check valves are not required since they are incorporated within the filter dryer shell. The core design filters out contaminant particles down to 25 microns. 100% copper sweat or nickel plated flare fittings. Desiccant core provides reliable and effective, removal of solid contaminants, acid and moisture. Provides three times the filtration as the standard bi-flow. Core is cushioned in fiber gaskets to protect core and to insure trouble-free performance. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion.



DBF163S

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DBF083S	V2A-083 SWEAT	3/8"	8	EA	1
DBF084S	V2A-084 SWEAT	1/2"	8	EA	1
DBF163	V2A-163 FLARE	3/8"	16	EA	1
DBF163S	V2A-163 SWEAT	3/8"	16	EA	1
DBF164S	V2A-164 SWEAT	1/2"	16	EA	1
DBF165S	V2A-165S SWEAT	3/8"	16	EA	1

Sight Glasses

Sight Glass and Moisture Indicator provides a quick visual diagnosis of refrigerant and moisture levels within a system. The sight glass indicates if the system has the proper refrigerant level, a restricted dryer or excessive pressure-drop. The moisture indicator recognizes moisture within the system. Provides early warning that a potential failure exists resulting in corrosion, chemical damage, restricted flow, or even compressor failure. Etch-resistant glass with a simple color comparison provides easy viewing and quick diagnostics. Flare models feature forged brass body and fittings for corrosion resistance. Sweat models feature copper fittings to permit solder installation without disassembly. Leak-proof design is compact and short in length to easily fit within a unit and provide accuracy in performance.



DPSG-2S

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DPSG-3MF	LDE-3-MF	MALE/FEMALE	3/8"	EA	1
DPSG-2S	LDE-2-S	SWEAT	1/4"	EA	1
DPSG-3S	LDE-3-S	SWEAT	3/8"	EA	1

LABELING AND IDENTIFICATION

DiversiTech Refrigerant ID Labels

Refrigerant labels are designed for proper identification of refrigerant in a recovery cylinder. These 3" x 4" self-adhesive vinyl refrigeration labels use a high-tack acrylic adhesive and UV cured screen printing. Each label indicates the type of refrigerant (eg. R-438A), the chemical name (eg. pentafluoroethane) and the UN No. (eg. UN3163).

- Color coded
- Large and easy to read refrigerant identification
- Durable UV cured screen printed



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
REFRIGERANT IDENTIFICATION LABELS (3" x 4")			
04022	R-22 Refrigerant ID Labels, pack of 10	PK	1
04134	R-134a Refrigerant ID Labels, pack of 10	PK	1
04404	R-404A (HP62/FX70) Refrigerant ID Labels, pack of 10	PK	1
04407	R-407C (SUVA 9000/KLEA 66) Refrigerant ID Labels, pack of 10	PK	1
04410	R-410A (AZ20) Refrigerant ID Labels, pack of 10	PK	1
04099	R-438A Refrigerant ID Labels, pack of 10	PK	1
04402	R-402A Refrigerant ID Labels, pack of 10	PK	1
04421	R-421A Refrigerant ID Labels, pack of 10	PK	1
04137	R-437A Refrigerant ID Labels, pack of 10	PK	1
SYSTEM REFRIGERANT/OIL LABELS (3" x 4")			
04850	Refrigerant Removed Labels, pack of 10	PK	1

COMPONENTS & CONSUMABLES | INLINE COMPONENTS

REFRIGERANT SAFETY CAPS

Sentry™ Refrigerant Locking Caps - R-410, Red, 1/4"

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in red color for easy identification of R-410 refrigerant. It is designed for 1/4" access ports. An O-ring seal is also pre-installed to prevent leaks.



RSC-RED-02

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-RED-02	Sentry™ Refrigerant Locking Caps - 1/4", Red, 2 pcs Pack	PK	1
RSC-RED-04K	Sentry™ Refrigerant Locking Caps - 1/4", Red, 4 pcs Pack w/1 Universal Key	PK	1
RSC-RED-10	Sentry™ Refrigerant Locking Caps - 1/4", Red, 10 pcs Pack	PK	1
RSC-RED-50K	Sentry™ Refrigerant Locking Caps - 1/4", Red, 50 pcs Pack w/2 Universal Keys	PK	1
RSC-RED-500	Sentry™ Refrigerant Locking Caps - 1/4", Red, 500 pcs Pack w/5 Driver Bits	PK	1

Sentry™ Refrigerant Locking Caps - Universal, Silver, 1/4"

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in silver color and could be used on different types of refrigerants. It is designed for 1/4" access ports. An O-ring seal is also pre-installed to prevent leaks.



RSC-SLV-02

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-SLV-02	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 2 pcs Pack	PK	1
RSC-SLV-04K	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 4 pcs Pack w/1 Universal Key	PK	1
RSC-SLV-10	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 10 pcs Pack	PK	1
RSC-SLV-50K	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 50 pcs Pack w/2 Universal Keys	PK	1
RSC-SLV-500	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 500 pcs Pack w/5 Driver Bits	PK	1

Sentry™ Universal Key for Refrigerant Locking Caps

This Universal Key is not only for DiversiTech's Sentry™ Refrigerant Locking Caps. It has three different keys that is fit to lock and unlock most of the refrigerant locking caps in the market. It is compact and easy to carry. This is the key contractors needed to get the job done!



RSC-TOOL

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-TOOL	Universal Key for Refrigerant Locking Caps	EA	1

Sentry™ Refrigerant Locking Caps - R-22, Green, 1/4"

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in green color for easy identification of R-22 refrigerant. It is designed 1/4" access ports. An O-ring seal is also pre-installed to prevent leaks.



RSC-GRN-02

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-GRN-02	Sentry™ Refrigerant Locking Caps - 1/4", Green, 2 pcs Pack	PK	1
RSC-GRN-04K	Sentry™ Refrigerant Locking Caps - 1/4", Green, 4 pcs Pack w/1 Universal Key	PK	1
RSC-GRN-10	Sentry™ Refrigerant Locking Caps - 1/4", Green, 10 pcs Pack	PK	1
RSC-GRN-50K	Sentry™ Refrigerant Locking Caps - 1/4", Green, 50 pcs Pack w/2 Universal Keys	PK	1

Sentry™ Refrigerant Locking Caps - R-410, Red, 5/16"

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in red color for easy identification of R-410 refrigerant. It is designed for 5/16" access ports typically used on mini-splits and European styles of A/C systems. An O-ring seal is also pre-installed to prevent leaks.



RSC-RED-02-E

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-RED-02-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 2 pcs Pack w/ Universal Key	PK	1
RSC-RED-04K-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 4 pcs Pack w/1 Universal Key	PK	1
RSC-RED-10-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 10 pcs Pack	PK	1
RSC-RED-50K-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 50 pcs Pack w/2 Universal Keys	PK	1



INLINE COMPONENTS | COMPONENTS & CONSUMABLES

REFRIGERANT SAFETY CAPS CONT'D

Cop-Cap™ Locking Valve Cover

An effective way to discourage and prevent the removal of refrigerant. Cop-Cap™ fits this standard service valve on all central AC units and mini-splits. It helps prevent access by unauthorized persons and can only be removed with the included special tool. Simply thread Cop-Cap™ assembly onto existing 1/4" flare connection on system and lock set screw in place with hex wrench provided.



VCC-4

- Seals service valve to prevent leaks
- Prevents illegal venting or theft of refrigerant
- Stops unauthorized access in unsecured areas

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VCC-4	Cop-Cap™, Pack of 2	PK	1
VCC-4B	Cop-Cap™ bulk, 100 per case	EA	100

TUBING INSULATION

Tubing Insulation

Refrigerant labels are designed for proper identification of refrigerant in a recovery cylinder. These 3" x 4" Highest quality tubing insulation by Armacell. AC Accoflex® tubing insulation is a flexible rubber product from the inventors of elastomeric foam insulation. It is designed exclusively for HVAC, with a tough surface and excellent resistance to ultraviolet damage, condensation and mold.



7-3838

3/8" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-3838	3/8" ID x 3/8" Wall, pack of 100,	600"	PK	1
7-3812	1/2" ID x 3/8" Wall, pack of 80	480"	PK	1
7-3858	5/8" ID x 3/8" Wall, pack of 65	390"	PK	1
7-3834	3/4" ID x 3/8" Wall, pack of 55	330"	PK	1
7-3878	7/8" ID x 3/8" Wall, pack of 45	270"	PK	1
7-381-18	1-1/8" ID x 3/8" Wall, pack of 35	210"	PK	1
7-381-38	1-3/8" ID x 3/8" Wall, pack of 30	180"	PK	1
7-381-58	1-5/8" ID x 3/8" Wall, pack of 20	120"	PK	1
7-382-18	2-1/8" ID x 3/8" Wall, pack of 16	96"	PK	1
7-382-58	2-5/8" ID x 3/8" Wall, pack of 12	72"	PK	1

1/2" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-1238	3/8" ID x 1/2" Wall, pack of 75	450"	PK	1
7-1212	1/2" ID x 1/2" Wall, pack of 66	396"	PK	1
7-1258	5/8" ID x 1/2" Wall, pack of 50	300"	PK	1
7-1234	3/4" ID x 1/2" Wall, pack of 40	240"	PK	1
7-1278	7/8" ID x 1/2" Wall, pack of 35	210"	PK	1
7-121-18	1-1/8" ID x 1/2" Wall, pack of 25	150"	PK	1
7-121-38	1-3/8" ID x 1/2" Wall, pack of 20	120"	PK	1
7-121-58	1-5/8" ID x 1/2" Wall, pack of 15	90"	PK	1
7-122-18	2-1/8" ID x 1/2" Wall, pack of 10	60"	PK	1
7-122-58	2-5/8" ID x 1/2" Wall, pack of 10	60"	PK	1

3/4" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-3438	3/8" ID x 3/4" Wall, pack of 40	240"	PK	1
7-3412	1/2" ID x 3/4" Wall, pack of 35	210"	PK	1
7-3458	5/8" ID x 3/4" Wall, pack of 24	144"	PK	1
7-3434	3/4" ID x 3/4" Wall, pack of 23	138"	PK	1
7-3478	7/8" ID x 3/4" Wall, pack of 20	120"	PK	1
7-341-18	1-1/8" ID x 3/4" Wall, pack of 15	90"	PK	1
7-341-58	1-5/8" ID x 3/4" Wall, pack of 10	60"	PK	1
7-342-18	2-1/8" ID x 3/4" Wall, pack of 9	54"	PK	1
7-342-58	2-5/8" ID x 3/4" Wall, pack of 8	48"	PK	1
7-382-58	2-5/8" ID x 3/8" Wall, pack of 12	72"	PK	1

1" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-1058	5/8" ID x 1" Wall, pack of 20	120"	PK	1

COMPONENTS & CONSUMABLES | INLINE COMPONENTS

TUBING INSULATION CONT'D

Self-Sealing Split Tubing Insulation

The Tubolit® semi-slit tubing insulation is made of 100% non-particulating polyethylene foam pipe insulation. Its closed-cell structure won't wick moisture and helps prevent the absorption of condensation that could cause mold to develop over time. It is pre-slit with a factory applied pressure sensitive adhesive to both seam surfaces and has a release liner for easy installation. Available in 3/8", 1/2", 3/4" and 1" wall thickness options with inner diameters from 3/8" to 3-1/8".



7-3838

3/8" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3838	3/8" ID x 3/8" Wall, pack of 90	540"	PK	1
7-S1238	1/2" ID x 3/8" Wall, pack of 76	456"	PK	1
7-S5838	5/8" ID x 3/8" Wall, pack of 66	396"	PK	1
7-S3438	3/4" ID x 3/8" Wall, pack of 50	300"	PK	1
7-S7838	7/8" ID x 3/8" Wall, pack of 46	276"	PK	1
7-S11838	1-1/8" ID x 3/8" Wall, pack of 37	222"	PK	1
7-S13838	1-3/8" ID x 3/8" Wall, pack of 30	180"	PK	1
7-S15838	1-5/8" ID x 3/8" Wall, pack of 23	138"	PK	1
7-S11038	1-1/2" ID x 3/8" Wall, pack of 21	126"	PK	1
7-S21838	2-1/8" ID x 3/8" Wall, pack of 16	96"	PK	1
7-S20038	2-3/8" ID x 3/8" Wall, pack of 14	84"	PK	1
7-S25838	2-5/8" ID x 3/8" Wall, pack of 12	72"	PK	1
7-S21038	2-7/8" ID x 3/8" Wall, pack of 10	60"	PK	1
7-S31838	3-1/8" ID x 3/8" Wall, pack of 9	54"	PK	1

1/2" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3812	3/8" ID x 1/2" Wall, pack of 69	414"	PK	1
7-S1212	1/2" ID x 1/2" Wall, pack of 56	336"	PK	1
7-S5812	5/8" ID x 1/2" Wall, pack of 50	300"	PK	1
7-S3412	3/4" ID x 1/2" Wall, pack of 44	264"	PK	1
7-S7812	7/8" ID x 1/2" Wall, pack of 40	240"	PK	1
7-S10012	1" ID x 1/2" Wall, pack of 35	210"	PK	1
7-S11812	1-1/8" ID x 1/2" Wall, pack of 31	186"	PK	1
7-S12512	1-1/4" ID x 1/2" Wall, pack of 28	168"	PK	1
7-S13812	1-3/8" ID x 1/2" Wall, pack of 25	150"	PK	1
7-S15812	1-5/8" ID x 1/2" Wall, pack of 20	120"	PK	1
7-S11012Y	1-1/2" ID x 1/2" Wall, pack of 17	102"	PK	1
7-S21812	2-1/8" ID x 1/2" Wall, pack of 14	84"	PK	1
7-S0012	2-3/8" ID x 1/2" Wall, pack of 12	72"	PK	1
7-S25812	2-5/8" ID x 1/2" Wall, pack of 10	60"	PK	1
7-S21012	2-7/8" ID x 1/2" Wall, pack of 9	54"	PK	1
7-S31812	3-1/8" ID x 1/2" Wall, pack of 8	48"	PK	1
7-S35812	3-5/8" ID x 1/2" Wall, pack of 6	36"	PK	1
7-S41812Y	4-1/8" ID x 1/2" Wall, pack of 5	30"	PK	1
7-S40012	4-1/2" ID x 1/2" Wall, pack of 4	24"	PK	1

3/4" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3834	3/8" ID x 3/4" Wall, pack of 25	228"	PK	1
7-S1234	1/2" ID x 3/4" Wall, pack of 35	210"	PK	1
7-S5834	5/8" ID x 3/4" Wall, pack of 30	180"	PK	1
7-S3434	3/4" ID x 3/4" Wall, pack of 27	162"	PK	1
7-S7834	7/8" ID x 3/4" Wall, pack of 25	150"	PK	1
7-S11834	1-1/8" ID x 3/4" Wall, pack of 20	120"	PK	1
7-S13834	1-3/8" ID x 3/4" Wall, pack of 16	96"	PK	1
7-S15834	1-5/8" ID x 3/4" Wall, pack of 14	84"	PK	1
7-S11034	1-1/2" ID x 3/4" Wall, pack of 11	66"	PK	1
7-S21834	2-1/8" ID x 3/4" Wall, pack of 9	54"	PK	1
7-S20034	2-3/8" ID x 3/4" Wall, pack of 9	54"	PK	1
7-S25834	2-5/8" ID x 3/4" Wall, pack of 8	48"	PK	1
7-S21034	2-7/8" ID x 3/4" Wall, pack of 7	42"	PK	1
7-S31834	3-1/8" ID x 3/4" Wall, pack of 6	36"	PK	1
7-S35834	3-5/8" ID x 3/4" Wall, pack of 5	30"	PK	1
7-S41834	4-1/8" ID x 3/4" Wall, pack of 4	24"	PK	1
7-S40034	4-1/2" ID x 3/4" Wall, pack of 4	24"	PK	1

1" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3810	3/8" ID x 1" Wall, pack of 25	150"	PK	1
7-S1210	1/2" ID x 1" Wall, pack of 21	126"	PK	1
7-S5810	5/8" ID x 1" Wall, pack of 20	120"	PK	1
7-S3410	3/4" ID x 1" Wall, pack of 20	120"	PK	1
7-S7810	7/8" ID x 1" Wall, pack of 16	96"	PK	1
7-S10010	1" ID x 1" Wall, pack of 16	96"	PK	1
7-S11810	1-1/8" ID x 1" Wall, pack of 14	84"	PK	1
7-S13810	1-3/8" ID x 1" Wall, pack of 12	72"	PK	1
7-S15810	1-5/8" ID x 1" Wall, pack of 10	60"	PK	1
7-S11010	1-1/2" ID x 1" Wall, pack of 9	54"	PK	1
7-S21810	2-1/8" ID x 1" Wall, pack of 9	54"	PK	1
7-S20010	2-3/8" ID x 1" Wall, pack of 7	42"	PK	1
7-S25810	2-5/8" ID x 1" Wall, pack of 6	36"	PK	1
7-S21010	2-7/8" ID x 1" Wall, pack of 5	30"	PK	1
7-S31810	3-1/8" ID x 1" Wall, pack of 4	24"	PK	1
7-S35810	3-5/8" ID x 1" Wall, pack of 4	24"	PK	1
7-S41810	4-1/8" ID x 1" Wall, pack of 4	24"	PK	1
7-S40010	4-1/2" ID x 1" Wall, pack of 3	18"	PK	1
7-S40012	4-1/2" ID x 1/2" Wall, pack of 4	24"	PK	1

HEATING PRODUCTS | COMPONENTS & CONSUMABLES

CO AND SMOKE ALARMS

Carbon Monoxide Alarms

- 10 year sealed batteries provide continuous protection
- Microprocessor intelligence combined with electrochemical sensor virtually eliminates nuisance alarms
- Red LED indicates the status of power and CO
- Table top (free standing) or wall mounted. Mounting hardware included.
- Exceeds industry standards, ETL listed to UL Standard UL 2034 and California State Fire Marshal approved.
- 10 year limited warranty on both battery and alarm



CM-1000

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CM-1000	Carbon Monoxide Smart Alarm	EA	1

IoPhic® Smoke & Fire, Carbon Monoxide & Natural Gas Alarm

- 4-in-1 smart alarm uses a single sensor to detect both CO & Natural Gas AND protects against both fast flaming & slow smoldering fires
- 120-volt AC hardwired alarm with backup 9 volt battery is suitable for houses, apartments and mobile homes
- Mount the bracket to any standard wiring junction box and use the large mounting base to cover imperfections in drywall
- Features a quick activation pull-tab and a front loading battery drawer for replacement without removing the alarm from the bracket
- Comes with a 7 year limited warranty



MDSCN111

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MD-SCN111	Smoke & Fire, Carbon Monoxide and Natural Gas Alarm	EA	4

GAS CONNECTORS

EasyFlex Tankless Water Heater Connection Kits

The Tankless Water Heater Connection Kits by EASYFLEX are customized kits. Each kit includes one 1" OD, 3/4" MXF Gas Connector, two 3/4" ID, 3/4" FIP x 3/4" MIP Water Connectors, Hot & Cold Isolation Valve Set, and Pressure Relief Valve. One box has it all! Installation and maintenance are made easy for contractors and homeowners.



Global Pipe Manufacturer
EASYFLEX

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EFLF-ISV-HCTP	Tankless Water Heater Isolation Valve Set	EA	1
EFHC-0118-3Y0118	Tankless Water Heater Isolation Valve Set + 18" Connectors	EA	1
EFHC-0124-3Y0124	Tankless Water Heater Isolation Valve Set + 24" Long Connectors	EA	1

DiversiTech Gas Connectors 1/2" OD

Combining flexibility, durability, and functionality, DiversiTech stainless steel gas connectors are CSA design certified and 100% leak tested for quality and security. DiversiTech gas connectors are durable and reliable to give you everything you need. Available in a variety of sizes and lengths.



D20-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D20-3132-18	Gas Connector - 18" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-36	Gas Connector - 36" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-48	Gas Connector - 48" long, 1/2" OD x 3/8" ID, M x F	EA	12

DiversiTech Gas Connectors 5/8" OD

Combining flexibility, durability, and functionality, DiversiTech stainless steel gas connectors are CSA design certified and 100% leak tested for quality and security. DiversiTech gas connectors are durable and reliable to give you everything you need. Available in a variety of sizes and lengths.



D30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D30-3131-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3132-18	Gas Connector - 18" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, M x F	EA	12



NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

diversitech.com

COMPONENTS & CONSUMABLES | HEATING PRODUCTS

GAS CONNECTORS CONT'D

Yellow Epoxy Coated Gas Connectors

Yellow coated gas connectors include an epoxy coating for added durability and extra protection from corrosion, chemical stains from common household products and plumbing repairs. They can be used in various applications: Dryers, Boilers, BBQ Grills, Ranges/Ovens, Furnaces, Fireplaces, Space Heaters, Tankless Water Heaters, Rooftop Units, Manufactured Homes.



DC30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DC20-3132-18	Gas Connector coated - 18" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3132-24	Gas Connector coated - 24" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3132-36	Gas Connector coated - 36" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3132-48	Gas Connector coated - 48" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-18	Gas Connector coated - 18" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-24	Gas Connector coated - 24" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-36	Gas Connector coated - 36" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-48	Gas Connector coated - 48" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC30-3132-18	Gas Connector coated - 18" long, 5/8" OD x -Ω" ID. M x F	EA	12
DC30-3132-24	Gas Connector coated - 24" long, 5/8" OD x -Ω" ID. M x F	EA	12
DC30-3132-36	Gas Connector coated - 36" long, 5/8" OD x -Ω" ID. M x F	EA	12
DC30-3132-48	Gas Connector coated - 48" long, 5/8" OD x -Ω" ID. M x F	EA	12
DC30-3131-18	Gas Connector coated - 18" long, 5/8" OD x -Ω" ID. M x M	EA	12
DC30-3131-24	Gas Connector coated - 24" long, 5/8" OD x -Ω" ID. M x M	EA	12
DC30-3131-36	Gas Connector coated - 36" long, 5/8" OD x -Ω" ID. M x M	EA	12
DC30-3131-48	Gas Connector coated - 48" long, 5/8" OD x -Ω" ID. M x M	EA	12

Dormont 20 Series

1/2" O.D. x 3/8" I.D. 1/2" MIP x 1/2" FIP Connectors



20-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
20-3132-18	Gas Connector - 18" Long	EA	12
20-3132-24	Gas Connector - 24" Long	EA	12
20-3132-36	Gas Connector - 36" Long	EA	12
20-3132-48	Gas Connector - 48" Long	EA	12

Dormont 20 Series with Valve

Corrugated stainless steel connectors with special Supr Safe design to increase flexibility. Maximum service and safety and is approved for both indoor and outdoor use. This is perfect for range and furnace connections. This Series is AA and CGA approved. This connector comes in 20 3135 18 1/2" O.D. x 3/8" I.D. x 1/2" FIP Ball Valve.



20-3135-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
20-3135-18	Gas Connector - 18" Long	EA	12
20-3135-24	Gas Connector - 24" Long	EA	12
20-3135-36	Gas Connector - 36" Long	EA	12
20-3135-48	Gas Connector - 48" Long	EA	12

Dormont 30 Series

Corrugated, stainless steel connectors with special Supr Safe® design to increase flexibility. Maximum service and safety, approved for indoor or outdoor use. Perfect for range and furnace connection. AGA and CGA approved. 3131 Series: 5/8" O.D. x 1/2" I.D. 1/2" MIP x 1/2" MIP Connectors. 3132 Series: 5/8" O.D. x 1/2" I.D. 1/2" MIP x 1/2" FIP Connectors.



30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
30-3131-24	Gas Connector - 24" Long	EA	12
30-3131-36	Gas Connector - 36" Long	EA	12
30-3131-48	Gas Connector - 48" Long	EA	12
30-3132-12	Gas Connector - 12" Long	EA	12
30-3132-18	Gas Connector - 18" Long	EA	12
30-3132-24	Gas Connector - 24" Long	EA	12
30-3132-30	Gas Connector - 30" Long	EA	12
30-3132-36	Gas Connector - 36" Long	EA	12
30-3132-48	Gas Connector - 48" Long	EA	12
30-3132-60	Gas Connector - 60" Long	EA	12
30-3132-72	Gas Connector - 72" Long	EA	12

Gas Ball Valve

Gas Ball Valves meet the stringent ISO 9000 quality standard. AGA and CGA certified.



91-3042

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
91-3042	5/8" O.D. Flare x 3/4" FIP for "30 Series" Gas Conn.	EA	10
91-2032	1/2" O.D. Flare x 1/2" FIP for "20 Series" Gas Conn.	EA	10
92-3232	1/2" FIP x 1/2" FIP	EA	10
92-4242	3/4" FIP x 3/4" FIP	EA	10

HEATING PRODUCTS | COMPONENTS & CONSUMABLES

GENERAL HEATING PRODUCTS

Gas Equipment Service Tools

The GDK4080 is a complete set of high quality, small diameter precision gauging drills used to clean and enlarge gas orifices, burners and carburetor jets. It contains 41 commonly used gauging drills with handles, sizes from #40 to #80. A tapered broach with handle (GB3020) is also included.



GDK4080

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GDK4080	Gauging Kit Drills, #40-80 set	EA	1
GB3020	Broach 3015 with handle	EA	1

HEAT RESISTANT CLOTH

Heat Resistant Cloth

This flame barrier drop cloth withstands temperatures to 3,000°F. No asbestos. Protects walls, floors, equipment, components and adjacent surfaces from torch flames when soldering, brazing or welding. All cloths have edges taped and sewn with grommets at each corner. Highly resistant to many chemicals and acids.



16510



16500

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
16500	18" x 18" Plain	EA	1
16510	18" x 18" Keyhole w/cutout for draping over pipes/tubes	EA	1
16520	36" x 36" Plain	EA	1

HEATING CABLES

Heating Cables

Self-regulating heating cables that give the installer the ultimate in flexibility.



HC-09

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HC-09	Heating Cables	EA	

IGNITERS

Wolverine® Universal Hot Surface Igniter

Wolverine® hot surface igniters feature protective, dynamic, and informative packaging. Wolverine® hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. Universal hot surface igniters allow a contractor to reduce truck stock and replace hundreds of OEM igniters with just one SKU.



IGN-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IGN-2	Wolverine™ Hot Surface Igniter by TrueStart™, Universal, Silicon Nitride	EA	6
IGN-2-6P	Wolverine™ Hot Surface Igniter by TrueStart™, Universal, Silicon Nitride - Contractor Pack, pack of 6	PK	1

Universal Silicon Carbide Igniters

TrueStart® hot surface igniters feature protective, dynamic, and informative packaging. TrueStart™ hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. TrueStart® hot surface igniters are available as a universal silicon carbide igniter.



IGN-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IGN-001	TrueStart™ Hot Surface Igniter, Universal, Silicon Carbide	EA	6

COMPONENTS & CONSUMABLES | HEATING PRODUCTS

IGNITERS CONT'D

Direct Replacement Igniters

TrueStart® hot surface igniters feature protective, dynamic, and informative packaging. TrueStart® hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. TrueStart® hot surface igniters are available as direct replacement for OEM silicon carbide igniters.



IGN-401

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IGN-401	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-401	EA	6
IGN-402	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-402	EA	6
IGN-403	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-403	EA	6
IGN-405	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-405	EA	6
IGN-406	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-406	EA	6
IGN-407	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-407	EA	6
IGN-408	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-408	EA	6
IGN-409	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-409	EA	6
IGN-410	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-410	EA	6
IGN-412	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-412	EA	6
IGN-004	TrueStart™ Silicon Nitride Universal Kit	EA	6
IGN-110-102	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-110-102	EA	6
IGN-110-103	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-110-103	EA	6
IGN-110-101	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-110-101	EA	6
IGN-108-101	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-108-101	EA	6
IGN-106	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-106-101	EA	6
IGN-IR	TrueStart™ Universal Round Hot Surface Igniter Kit	EA	6

FLAME SENSORS

TrueStart® Flame Sensors

TrueStart® flame sensors are a direct replacement for OEM flame sensors. They are easy to install with matching flame rod length and bending angles. Model options are available for Carrier®/BDP, Lennox, Goodman/Amana, Rheem/Ruud, JCI/York, and Trane systems.



900-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
900-1	TrueStart™ Flame Sensor replaces Robertshaw 10-760, White-Rodgers 760-401, Packard PFS401, Supco FLS401, MARS 67970, SIC SP-103	EA	1
900-3	TrueStart™ Flame Sensor replaces Carrier™/Bryant LH33WZ516, LH680013	EA	1
900-4	TrueStart™ Flame Sensor replaces Carrier™/Bryant LH33WZ517, LH33WZ511, LH33WZ515, LH680012, LH680014	EA	1
900-5	TrueStart™ Flame Sensor replaces Carrier™ LH33WZ518	EA	1
900-6	TrueStart™ Flame Sensor replaces Carrier™ LH33WZ520	EA	1
900-8	TrueStart™ Flame Sensor replaces Lennox™ 28M9701, 20467102	EA	1
900-9	TrueStart™ Flame Sensor replaces Lennox™ 44745-001, 44745001, R44745-001, 98M8701	EA	1
900-10	TrueStart™ Flame Sensor replaces Goodman/Amana 0130F000, B1172606, 20488501, L38-035, L38035	EA	1
900-11	TrueStart™ Flame Sensor replaces Rheem/Ruud 62-23543-01 and 62-23543-03	EA	1
900-14	TrueStart™ Flame Sensor replaces Trane SEN491, SEN1114, SEN441, SEN0441	EA	1
900-15	TrueStart™ Flame Sensor replaces JCI/York 024-35354-000, 025-35354-700, S1-02527773000, S1-02527773700	EA	1
900-16	TrueStart™ Flame Sensor replaces JCI/York 025-30788-000, 025-30788-700, S1-02530788700	EA	1
900-17	TrueStart™ Flame Sensor replaces JCI/York S1-2702-311P, 2702-311P, 2702-311	EA	1

HEATING PRODUCTS | COMPONENTS & CONSUMABLES

IRON FITTINGS

Black Steel Welded Nipples

Welded Steel that withstands 700 PSI test pressure is perfect for everyday use. The specs for this product are ASTM A 120 (Nom B 10) and the thickness is Sch. 40.



BPN-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPN-1	1/2" x CL Black Welded Nipple	EA	25
BPN-2	1/2" x 1-1/2" Black Welded Nipple	EA	25
BPN-3	1/2" x 2" Black Welded Nipple	EA	25
BPN-4	1/2" x 2-1/2" Black Welded Nipple	EA	25
BPN-5	1/2" x 3" Black Welded Nipple	EA	25
BPN-6	1/2" x 3-1/2" Black Welded Nipple	EA	25
BPN-7	1/2" x 4" Black Welded Nipple	EA	20
BPN-8	1/2" x 4-1/2" Black Welded Nipple	EA	15
BPN-9	1/2" x 5" Black Welded Nipple	EA	15
BPN-10	1/2" x 5-1/2" Black Welded Nipple	EA	25
BPN-11	1/2" x 6" Black Welded Nipple	EA	15
BPN-12	1/2" x 7" Black Welded Nipple	EA	25
BPN-13	1/2" x 8" Black Welded Nipple	EA	15
BPN-14	1/2" x 9" Black Welded Nipple	EA	25
BPN-15	1/2" x 10" Black Welded Nipple	EA	15
BPN-16	1/2" x 11" Black Welded Nipple	EA	25
BPN-17	1/2" x 12" Black Welded Nipple	EA	15
BPN-18	3/4" x CL Black Welded Nipple	EA	25
BPN-19	3/4" x 1-1/2" Black Welded Nipple	EA	25
BPN-20	3/4" x 2" Black Welded Nipple	EA	25
BPN-21	3/4" x 2-1/2" Black Welded Nipple	EA	25
BPN-22	3/4" x 3" Black Welded Nipple	EA	15
BPN-23	3/4" x 3-1/2" Black Welded Nipple	EA	15
BPN-24	3/4" x 4" Black Welded Nipple	EA	15

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPN-25	3/4" x 4-1/2" Black Welded Nipple	EA	20
BPN-26	3/4" x 5" Black Welded Nipple	EA	20
BPN-28	3/4" x 6" Black Welded Nipple	EA	15
BPN-30	3/4" x 8" Black Welded Nipple	EA	10
BPN-32	3/4" x 10" Black Welded Nipple	EA	10
BPN-34	3/4" x 12" Black Welded Nipple	EA	15
BPN-35	1" x CL Black Welded Nipple	EA	25
BPN-37	1" x 2" Black Welded Nipple	EA	25
BPN-38	1" x 2-1/2" Black Welded Nipple	EA	25
BPN-39	1" x 3" Black Welded Nipple	EA	5
BPN-40	1" x 3-1/2" Black Welded Nipple	EA	5
BPN-41	1" x 4" Black Welded Nipple	EA	10
BPN-43	1" x 5" Black Welded Nipple	EA	5
BPN-44	1" x 5-1/2" Black Welded Nipple	EA	10
BPN-45	1" x 6" Black Welded Nipple	EA	5
BPN-47	1" x 8" Black Welded Nipple	EA	5
BPN-51	1" x 12" Black Welded Nipple	EA	5
BPN-52	1/2" x 18" Black Welded Nipple	EA	5
BPN-53	1/2" x 24" Black Welded Nipple	EA	3
BPN-54	1/2" x 36" Black Welded Nipple	EA	5
BPN-A12	1/2" Assortment Pack, 6 each of CL thru 6", pack of 66	PK	2
BPN-A34	3/4" Assortment Pack, 6 each of CL thru 6", pack of 66	PK	2

90 Degree Ell

- Material: ASTM A 197 Cupola Malleable Iron, 150 lb.
- Dimensions::
ANSI B 16.3 - Malleable Iron Threaded Fittings
ANSI B 16.14 - Ferrous Pipe Plugs, Bushings etc.
ANSI B 16.39 - Malleable Iron Threaded Pipe Unions
- Threads: ANSI B 2.1 or BS 21
- Tensile Strength: 28.4 kg/mm.min



BPF-01

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-01	1/2" 90 Degree Elbow	EA	50
BPF-02	3/4" 90 Degree Elbow	EA	35
BPF-03	1" 90 Degree Elbow	EA	20

Coupling

The Coupling fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-07

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-07	1/2" Coupling	EA	60
BPF-08	3/4" Coupling	EA	50
BPF-09	1" Coupling	EA	25

45 Degree Ell

The 45 Degree Ell fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-04

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-04	1/2" 45 Degree Elbow	EA	50
BPF-05	3/4" 45 Degree Elbow	EA	40
BPF-06	1" 45 Degree Elbow	EA	15

Reducing Coupling

The Reducing Coupling fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-10	3/4" x 1/2" Reducing Coupling	EA	60
BPF-11	1" x 1/2" Reducing Coupling	EA	30
BPF-12	1" x 3/4" Reducing Coupling	EA	25

COMP. & CONSUMABLES | HEATING PRODUCTS / GEN. INDUS.

IRON FITTINGS CONT'D.

90 Degree Street Ell

The 90 Degree Street Ell fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-13

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-13	1/2" 90 Degree Street Elbow	EA	60
BPF-14	3/4" 90 Degree Street Elbow	EA	35

Reducing Tee

The Reducing Tee fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-21

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-20	3/4" x 1/2" x 1/2" Reducing Tee	EA	25
BPF-21	3/4" x 1/2" x 3/4" Reducing Tee	EA	20
BPF-34	1" x 1" x 1/2" Reducing Tee	EA	15

Cap

The Cap fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-25

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-25	1/2" Cap	EA	75
BPF-26	3/4" Cap	EA	40
BPF-27	1" Cap	EA	35

Union

The Union fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.39. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-31

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-31	1/2" Union	EA	50
BPF-32	3/4" Union	EA	35
BPF-33	1" Union	EA	20

Tee

The Tee fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-16

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-16	1/2" Tee	EA	40
BPF-17	3/4" Tee	EA	35
BPF-18	1" Tee	EA	20

Bushing

The Bushing fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.14. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-22

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-22	3/4" x 1/2" Hex Bushing	EA	75
BPF-23	1" x 1/2" Hex Bushing	EA	50

Plug

The Plug fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.14. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-28

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-28	1/2" Plug	EA	50
BPF-29	3/4" Plug	EA	30

ABRASIVE CLOTHS

Abrasive Cloth

Aluminum oxide, high quality 120 grit, abrasive cloth to thoroughly clean copper and steel tubing. Works wet or dry. Exceeds industry standards for abrasive cloth.



SC-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-10	Abrasive Cloth - 1-1/2" x 10 yds.	EA	1
SC-25	Abrasive Cloth - 1-1/2" x 25 yds.	EA	1

GENERAL INDUSTRIAL | COMPONENTS & CONSUMABLES

BATTERIES

Rayovac® is the leader in the industrial battery market and has been for years, with an estimated 50% share of the traditional industrial distribution channel. Rayovac® introduced the top-selling industrial flashlight to the market, and set the quality standard by which all other industrial flashlights are measured today. Whether your customer is searching for a toolbox-tough flashlight or high-performance batteries, Rayovac® offers a broad range of products to meet your needs.

Rayovac® Industrial Maximum Alkaline Batteries – Shrink Packed

- Same battery performance as the Contractor Packs at a lower cost
- Formulated specifically to exceed the everyday demands of industrial applications
- Outstanding dependability for “must work” applications



7-ALAA

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-ALAA	Alkaline AA Battery - Shrink Packed, pack of 8	EA	8
7-ALAAA	Alkaline AAA Battery - Shrink Packed, pack of 8	EA	8
7-ALC	Alkaline C Battery - Shrink Packed, pack of 6	EA	6
7-ALD	Alkaline D Battery - Shrink Packed, pack of 6	EA	6
7-AL9V	Alkaline 9V Battery - Shrink Packed, pack of 6	EA	6

Rayovac® Lantern Batteries

- Dependable performance — for “must work” applications
- Available in General Purpose, Heavy Duty, and Alkaline Maximum



7-806

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-806	6 Volt Alkaline Maximum - Spring Terminals, pack of 6	EA	6

Rayovac® Industrial Maximum Alkaline Batteries – Contractor Packs

- Contractor preferred, clear, resealable package
- Greater battery per pack quantities command higher battery sales
- Displays much more readily than other competitive batteries



7-ALAA-24



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-ALAA-24	Alkaline AA Battery - Contractor Pack, pack of 24	EA	24
7-ALAAA-18	Alkaline AAA Battery - Contractor Pack, pack of 18	EA	18
7-ALC-12	Alkaline C Battery - Contractor Pack, pack of 12	EA	12
7-ALD-12	Alkaline D Battery - Contractor Pack, pack of 12	EA	12
7-AL9V-12	Alkaline 9V Battery - Contractor Pack, pack of 12	EA	12

CONTACT CLEANERS

CBC II Contact Cleaner

A plastic safe, non flammable electronic contact and circuit board cleaner. Dries fast, leaves no residue. No harsh fumes or odors.



362-16

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
362-16	CBC II Contact Cleaner - 10 oz. Aerosol	EA	12

HF™ Contact Cleaner

A petroleum distillate based precision cleaner with a flash point of 205°F. It can be an alternative to CFCs when applications require higher flashpoints.



CRC-4-140

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-4-140	HF™ Contact Cleaner - 11 oz.	EA	12

QD® Contact Cleaner

This contact cleaner is suitable for cleaning sensitive electronics and electrical equipment and does not leave any residue. It evaporates quickly and is safe to use on all plastics. This product is more useful where lower flashpoint cleaners are acceptable. The QD® Contact Cleaner is NSF K2 Registered.



CRC-4CF

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-4CF	QD® Contact Cleaner - 11 oz.	EA	12

COMPONENTS & CONSUMABLES | GENERAL INDUSTRIAL

DEGREASERS

Heavy Duty Degreaser II

The Heavy Duty Degreaser II is a non-chlorinated, zero VOC formula for cleaning where chlorinated solvents are prohibited. It has a high flashpoint of 180°F. This degreaser effectively removes soils with no residue build-up. Please exercise caution on plastics.



CRC-7-140

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-7-140	Heavy Duty Degreaser II – 15 oz.	EA	12

Citrus Degreaser

The Citrus Degreaser has a new Low VOC Formula. The product removes grease, oil and lubricants with no water wash-off. It evaporates quickly and leaves no residue. The product gives off a pleasant citrus scent and is NSF C1 Registered.



CRC-7PS

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-7PS	Citrus Degreaser – 15 oz.	EA	12

Chlor-Free® Degreaser

Non-chlorinated degreasing solvent which is used to remove oil, grease and other contaminants. It is especially useful for applications requiring a quick turnaround and where a low flashpoint solvent can be used.



CRC-7Z

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-7Z	Chlor-Free® Degreaser - 14 oz.	EA	12

Electronic Degreaser

This Advanced Technology Formula is non-chlorinated, non-conductive, non-corrosive and non-staining. It rapidly dissolves grease, oil and sludge for better efficiency of mechanical equipment. The Electronic Degreaser has no flash or fire point.



CRC-4NU

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-4NU	Electronic Degreaser - 15 oz.	EA	12

HAND CLEANERS

Fast Orange® Hand Cleaner

Three out of five people prefer Fast Orange® over other hand cleaners. The first biodegradable, waterless hand cleaner with aloe, lanolin, and jojoba. Smooth lotion and extra-fine pumice available. USDA Approved.



HCO-7 HCO-15

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HCO-7	Fast Orange® - 7-1/2 fl. oz. Smooth Squeeze Bottle	EA	12
HCO-15	Fast Orange® - 15 oz. Smooth Squeeze Bottle	EA	12
HCO-128	Fast Orange® - 1 Gallon Smooth with Dispenser	EA	4
HCP-7	Fast Orange® - 7-1/2 fl. oz. Pumice Squeeze Bottle	EA	12
HCP-15	Fast Orange® - 15 oz. Pumice Squeeze Bottle	EA	12

Wypall® Waterless Hand Wipes

These wipes go wherever hands go to get dirty. Full sized 12" x 12" wipes for full sized cleaning. Natural cleaning agent is tough on grease, grime, ink, and paint. Dual textured – smooth for wiping on one side and tough for scrubbing on the other. More wipes with our 75 count bucket.



5-42272

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-42272	Wypall® Waterless Hand Wipes - Bucket	EA	6
5-4227R	Hand Wipe Refills, pack of 75	PK	6

DROP CLOTHS AND SURFACE PROTECTION

Canvas Drop Cloths

Premium grade canvas drop cloths are made of first quality and full piece 100% cotton duck canvas fabric. The industrial grade canvas fabric is durable since it is tightly woven using virgin cotton yarn. The drop cloths are washable and reusable. Double stitched seams with heavy-duty rot resistant thread.



DC-4128

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DC-4128	Canvas Drop Cloth - 4' x 12'	EA	1
DC-9128	Canvas Drop Cloth - 9' x 12'	EA	1

GENERAL INDUSTRIAL | COMPONENTS & CONSUMABLES

LUBRICANTS

Knock'er Loose® Penetrating Solvent

An industrial strength, low viscosity penetrant designed to rapidly loosen and free seized, bound or frozen fasteners. This product also quickly permeates rust, scale, gum, grease and corrosion. Independent tests reveal that it outperforms its competition.



CRC-1KB

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-1KB	Knock'er Loose® Penetrating Solvent - 13 oz.	EA	12

Screwloose® Industrial Penetrating Oil

A no compromise penetrant that attacks corrosion to free corroded fasteners and mechanical components. A super fast, powerful, concentrated penetrating solvent that loosens rust scale and corrosion and instantly penetrates minute and tightly fitted crevices.



CRC-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-8	Screwloose® Industrial Penetrating Oil - 11 oz.	EA	12

White Lithium Grease

White Lithium Grease has superior lubrication and durability in any weather or temperature. It is useful as a break in lubricant for bearings or as a general purpose lubricant and corrosion inhibitor for tools, machinery and equipment.



CRC-9

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-9	White Lithium Grease - 10 oz.	EA	12

Ultra Lite 3-36® Ultra Thin Non Staining Lubricant

Ultra thin, non staining lubricant that resists oil, dirt and dust build up. This lubricant also seals out moisture and protects against corrosion. It is excellent for drying out electrical components.



CRC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-1	Ultra Lite 3-36® Ultra Thin Non Staining Lubricant - 11 oz.	EA	12

Cutting Oil

Cutting Oil is a superior thread cutting lubricant for use on all types of metals, including brass, copper and aluminum. For use on ferrous and non-ferrous metals. Clings to vertical surfaces for improved performance.



CRC-CF2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-CF2	Cutting Oil - 16 oz. aerosol	EA	1

SP-400™ Corrosion Inhibitor

Long-term corrosion inhibitor that protects equipment subject to heat, humidity, chemicals or severely corrosive atmospheres. This product is best to use on machined surfaces and assemblies subjected to long periods of storage.



CRC-3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-3	SP-400™ Corrosion Inhibitor - 10 oz.	EA	12

3-36® Multi-Purpose Lubricant & Corrosion Inhibitor

A multi-purpose petroleum based compound that forms a clear, thin film that lubricates and protects against wear and corrosion. The product also displaces moisture and cleans.



CRC-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-2	3-36® Multi-Purpose Lubricant & Corrosion Inhibitor - 11 oz.	EA	12

Sta-Plex™ Extreme Pressure Premium Red Grease

A superior multi-purpose certified lithium complex based grease which contains extreme pressure, anti-wear, and anti-oxidation additives. The product is very useful in high temperature and performance applications. The drop point is 500°F.



CRC-13

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-13	Sta-Plex™ Extreme Pressure Premium Red Grease - 14 oz.	EA	10

Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize Coating

High-performance zinc coating that electrochemically bonds with ferrous metals to form a galvanic cell. The product also fights rust and corrosion and can be used as a touch-up for damaged galvanized coatings. Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize Coating dries quickly.



CRC-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-5	Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize	EA	12

Heavy Duty Silicone Mold Release

This product provides maximum releases and is useful in difficult to remove parts. The Heavy Duty Silicone Mold Release is colorless, odorless, non-staining and non-corrosive.



CRC-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-6	Heavy Duty Silicone Mold Release - 12 oz.	EA	12

COMPONENTS & CONSUMABLES | GENERAL INDUSTRIAL

LUBRICANTS CONT'D

WD-40®

Loosens rusted parts. Stops squeaks. Removes tar, grease and adhesives. Displaces moisture. Protects metal. New Smart Straw can.



741-002 741-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
741-001	WD-40, 8 oz.	EA	12
741-002	WD-40, 11 oz.	EA	12
741-003	WD-40, 14.4 oz. with E-Z Reach	EA	12

INDUSTRIAL TOWELS

Terry Towels

100% cotton. Minimum of 14" x 17". Pre-washed for absorbency, fully-hemmed, all-white, and reusable.



DTT-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTT-10	Terry Towels, pack of 10	PK	1
DTT-24	Terry Towels, pack of 24	PK	8

Shop Towels

Heavy duty reusable towels. For wipe ups of grease, oil, water, etc. 100% cotton material is pre-shrunk and hemmed. Each towel measures 13" x 16".



ST-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ST-4	Shop Towels, pack of 4	PK	1
ST-10	Shop Towels, pack of 10	PK	1
ST-24	Shop Towels, pack of 24	PK	1

SHEET METAL SCREWS

Masonry Screw

This product comes in a pack of 250 and is suitable for brick, tile, slate, cement, and cinder block. The screws are a nice addition to the toolbox.



5-SCRMS

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-SCRMS	Masonry Screw - 1/4" x 1-1/4", pack of 250	PK	1

Anchor Kit

Plastic anchor kit for sheet rock applications. Kit includes 100 anchors, screws and 1 masonry bit.



540-AK100

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-AK100	Anchor size 1/4 x 1, Screw Size 10 x 1-1/4 HWH	EA	1

GENERAL INDUSTRIAL | COMPONENTS & CONSUMABLES

SHEET METAL SCREWS CONT'D

Sheet Metal Screws - Drill Point

Self-drilling, self-tapping. Hex washer head. Produces the optimum hole size, resulting in a tighter fit. Made from special heat treated steel for extra strength. Packaged in resealable plastic cartons.



5-SCR61-2DP



5-SCR81-2DPBULK



5-SCR82DP

CATALOG NO.	DESCRIPTION	HEAD SIZE	UOM	ORDER MUL.
5-SCR61-2DP	6 x 1/2 Drill Point, pack of 1,000	1/4"	PK	1
5-SCR61-2DPBULK	6 x 1/2 Drill Point - Bulk, pack of 15,000	1/4"	PK	1
5-SCR81-2DP	8 x 1/2 Drill Point, pack of 1,000	1/4"	PK	1
5-SCR81-2DPBULK	8 x 1/2 Drill Point - Bulk, pack of 10,000	1/4"	PK	1
5-SCR83-4DP	8 x 3/4 Drill Point, pack of 500	1/4"	PK	1
5-SCR83-4DPBULK	8 x 3/4 Drill Point - Bulk, pack of 10,000	1/4"	PK	1
5-SCR81DP	8 x 1 Drill Point, pack of 500	1/4"	PK	1
5-SCR81DP-BULK	8 x 1 Drill Point - Bulk, pack of 7,500	1/4"	PK	1
5-SCR101-2DP	10 x 1/2 Drill Point, pack of 500	5/16"	PK	1
5-SCR101-2DPBULK	10 x 1/2 Drill Point - Bulk, pack of 10,000	5/16"	PK	1
5-SCR103-4DP	10 x 3/4 Drill Point, pack of 500	5/16"	PK	1
5-SCR103-4DP100	10 x 3/4 Drill Point, pack of 100	5/16"	PK	1
5-SCR103-4DPBULK	10 x 3/4 Drill Point - Bulk, pack of 5,000	3/4"	PK	1
5-SCR101DP	10 x 1 Drill Point, pack of 500	5/16"	PK	1
5-SCR101DP-BULK	10 x 1 Drill Point - Bulk, pack of 5,000	5/16"	PK	1
5-SCR101-12DP	10 x 1-1/2 Drill Point, pack of 250	5/16"	PK	1
5-SCR101-12DP BULK	10 x 1-1/2 Drill Point - Bulk, pack of 3,500	5/16"	PK	1
5-SCR102DP	10 x 2 Drill Point, pack of 350	5/16"	PK	1
5-SCR102DP-BULK	10 x 2 Drill Point - Bulk, pack of 2,500	5/16"	PK	1

Sheet Metal Screws - Taper Point

Hex washer slotted head. Burr-free. Full 5/16" head will not strip out of hex driver opening. Heat treated tapered point will not break or "walk". Packaged in resealable plastic cartons.



5-SCR63-8



5-SCR81-2BULK



5-SCR101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-SCR63-8	6 x 3/8 Taper Point, pack of 1,000	PK	1
5-SCR63-8BULK	6 x 3/8 Taper Point - Bulk, pack of 20,000	PK	1
5-SCR71-2	7 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR71-2BULK	7 x 1/2 Taper Point - Bulk, pack of 15,000	PK	1
5-SCR81-2	8 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR81-25M	8 x 1/2 Taper Point, pack of 5,000	PK	1
5-SCR81-2BULK	8 x 1/2 Taper Point - Bulk, pack of 12,000	PK	1
5-SCR83-4	8 x 3/4 Taper Point, pack of 1,000	PK	1
5-SCR83-4BULK	8 x 3/4 Taper Point - Bulk, pack of 10,000	PK	1
5-SCR81	8 x 1 Taper Point, pack of 500	PK	1
5-SCR81BULK	8 x 1 Taper Point - Bulk, pack of 7,500	PK	1
5-SCR81-12	8 x 1-1/2 Taper Point, pack of 250	PK	1
5-SCR81-12-100	8 x 1-1/2 Taper Point, pack of 100	PK	1
5-SCR81-12W	8 x 1-1/2 Taper Point w/White Head,	PK	1
5-SCR81-12BULK	8 x 1-1/2 Taper Point - Bulk, pack of 5,000	PK	1
5-SCR82-100	8 x 2 Taper Point, pack of 100	PK	1
5-SCR82	8 x 2 Taper Point, pack of 350	PK	1
5-SCR82W	8 x 2 Taper Point w/White Head, pack of 250	PK	1
5-SCR82BULK	8 x 2 Taper Point - Bulk, pack of 3,000	PK	1
5-SCR103-4	10 x 3/4 Taper Point, pack of 1,000	PK	1
5-SCR103-4BULK	10 x 3/4 Taper Point - Bulk, pack of 10,000	PK	1
5-SCR101	10 x 1 Taper Point, pack of 500	PK	1
5-SCR101-2	10 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR101BULK	10 x 1 Taper Point - Bulk, pack of 7,000	PK	1

COMP. & CONSUM. | GEN. INDUS. / SAFETY & CONSUMABLES

MARKERS, PAINTS AND PRIMERS

General Purpose Spray Paint

New, more complete line of professional quality fast drying spray paints. Color code compressors or refrigerant recovery cylinders to match standard refrigerant identifying colors. Touch up equipment housings. Product meets most recent VOC legislation and is currently compliant.



799-002

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
799-001	Spray Paint - Gloss Black - 12 oz.	EA	6
799-002V	Spray Paint - Flat Black - 12 oz.	EA	6
799-003	Spray Paint - Gloss White - 12 oz.	EA	6
799-004	Spray Paint - Flat White - 12 oz.	EA	6
799-005	Spray Paint - Dark Machinery Gray - 12 oz.	EA	6
799-006	Spray Paint - Gray Primer - 12 oz.	EA	6
799-010	Spray Paint - Orange - 12 oz.	EA	6
799-011	Spray Paint - Aluminum (Silver) - 12 oz.	EA	6

Industrial Enamel

Finally an aerosol paint that sprays in any direction without clogging. We guarantee it! Dries tack free in 10 to 20 minutes; fully dry in just one hour. Excellent corrosion and solvent resistance. Resists heat up to 250°F. Now in 20 oz. cans. Product meets most recent VOC legislation and is currently compliant.



799-024

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
799-021	Industrial Enamel - Flat Black - 12 oz.	EA	6
799-022	Industrial Enamel - Gloss White - 12 oz.	EA	6
799-024	Industrial Enamel - Machinery Light Gray - 12 oz.	EA	6
799-025	Industrial Enamel - Aluminum- 12 oz.	EA	6

High Heat Spray Paint

An ultra high temperature coating formulated to resist temperatures up to 1300°F. Great for use on boilers, furnaces, steam pipes, chimney collars, compressors and engine manifolds. Product meets most recent VOC legislation and is currently compliant.



799-041

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
799-040	High Heat Spray Paint - Aluminum - 12 oz.	EA	6
799-041	High Heat Spray Paint - Black - 12 oz.	EA	6

COVERALLS

KLEENGUARD®

KleenGuard® Personal Protective Equipment (PPE) enables rather than inhibits – allowing for maximum productivity and safety for you and your employees. When you're looking for an economical way to help protect your workers during potentially hazardous tasks, the Kleenguard brand A35 Disposable Coveralls, for Liquid and Particle Protection, are an excellent choice.

- Microporous film-laminated material helps protect against hazardous liquids (splashes) and dry particles (like dust and dirt)
- This protective suit has a zipper front and open wrists and ankles
- Available in sizes Medium to 3XL, meets ANSI / ISEA 101- 1996 standards
- PPE for hazardous liquid handling, pressure washing, maintenance, industrial / general manufacturing
- Meets American National Standards Institute and International Safety Equipment Association ANSI/ISEA 101-1996 sizing standard



COV-WPM



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
COV-WPM	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, Medium, Case/25	CS	1
COV-WPL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, Large, Case/25	CS	1
COV-WPXL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, X-Large, Case/25	CS	1
COV-WP2XL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, 2X-Large, Case/25	CS	1
COV-WP3XL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, 3X-Large, Case/25	CS	1

DISPOSABLE GLOVES

Nitrile Disposable Gloves

Better puncture resistance than latex or vinyl. Superb tensile strength. Powder free to not compromise adhesive seals or fresh paint. Latex free alternative for latex-sensitive workers. Great barrier protection. Textured for a reliable grip, wet or dry. 9" cuff. Oil resistant.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
NG-MCM-35	Nitrile Gloves, Medium, Powder Free, 3.5mil, Pack of 100	PK	10
NG-MCL-35	Nitrile Gloves, Large, Powder Free, 3.5mil, Pack of 100	PK	10
NG-MCXL-35	Nitrile Gloves, X-Large, Powder Free, 3.5mil, Pack of 100	PK	10
NG-MCM-6	Nitrile Gloves, Medium, Powder Free, 6mil, Pack of 100	PK	10
NG-MCL-6	Nitrile Gloves, Large, Powder Free, 6mil, Pack of 100	PK	10
NG-MCXL-6	Nitrile Gloves, XLarge, Powder Free, 6mil, Pack of 100	PK	10



NG-MCL-6

SAFETY AND CONSUMABLES | COMPONENTS & CONSUMABLES

WORK GLOVES

Cut Resistant Gloves

The 540-42545 coated safety gloves are made of ultra-high molecular weight polyethylene (UHMWPE) yarn with nylon and stretch fiber, which provide both cut resistance and a comfortable fit. They are rated with ANSI Level 2 / EN388 Level 3 Cut Resistance and CPPT = 686 grams. This glove is designed for protection against minor hand lacerations and abrasions. The 540-98237 coated safety gloves are made of ultra-high molecular weight polyethylene (UHMWPE) fiber, spun with glass, stainless steel and spandex. They offer ANSI Level 4 / EN388 Level 5 Cut Resistance and CPPT = 2,085 grams. It is great for industrial tasks that require protection against hand lacerations.



540-42545

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-42545	Cut Resistant Glove, Level 3, Large, Black/White Color	PK	1
540-98237	Cut Resistant Glove, Level 5, Large, Black & Salt & Pepper Color	PK	1

Nitrile Gloves

Foam control gloves for industrial use that provide a high level of wet and dry grip. Standard in applications where tactile sensitivity is required.



540-1005L

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-1005L	Nitrile Gloves - Large, 1 pair per pack	EA	1

Heavy Duty Work Gloves

Your choice of durable work gloves. Washable, breathable, and durable for everyday use.



540-HU1L

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-HU1L	Heavy Utility Gloves - Large, 1 pair per pack	PK	1

Jackson Safety G40 Latex Coated Gloves

- Breathable cotton back for comfort; Silicone-free
- Crinkled latex coating for excellent grip
- Highest EN388 tear resistance rating; Excellent durability
- Separate right and left gloves in a pair for a snug fit
- Pack of 12 pairs



G-LCM
JACKSON

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
G-LCM	Jackson Safety G40 Latex Coated Gloves, Medium, 12 pairs per pack	PK	1
G-LCL	Jackson Safety G40 Latex Coated Gloves, Large, 12 pairs per pack	PK	1
G-LCXL	Jackson Safety G40 Latex Coated Gloves, X-Large, 12 pairs per pack	PK	1
G-LC2XL	Jackson Safety G40 Latex Coated Gloves, 2X-Large, 12 pairs per pack	PK	1

Leather Work Gloves

Versatile leather work gloves ideal for many industrial jobs. These leather work gloves offer: wing thumb pattern, continuous pull patch, seamless full leather index finger, leather knuckle strap, leather finger tips with elastic gather on back. Generously sized for a good working fit.



540-2114

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-2114	Leather Glove w/Safety Cuff, 1 pair per pack	EA	12

Jackson Safety G40 Foam Nitrile Coated Gloves

- 25% better productivity than leather, with excellent grip and dexterity for rough tasks
- Maintains the highest EN388 abrasion rating, even after five washes
- Better oil and industrial grease grip (almost 3x better than previous G40 nitrile gloves)
- Seamless knit nylon back for comfort, available in a variety of sizes (ranging from Medium up to 2XL)
- Pack of 12 Pairs



G-NCM
JACKSON

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
G-NCM	Jackson Safety G40 Foam Nitrile Coated Gloves, Medium, 12 pairs per pack	PK	1
G-NCL	Jackson Safety G40 Foam Nitrile Coated Gloves, Large, 12 pairs per pack	PK	1
G-NCXL	Jackson Safety G40 Foam Nitrile Coated Gloves, X-Large, 12 pairs per pack	PK	1
G-NC2XL	Jackson Safety G40 Foam Nitrile Coated Gloves, 2X-Large, 12 pairs per pack	PK	1

Box Handler Gloves

Washable, breathable, and durable for everyday use.



540-BH1L

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-BH1L	Box Handler Gloves - Large, 1 pair per pack	PK	6

COMPONENTS & CONSUMABLES | SAFETY AND CONSUMABLES

HAND WARMERS

Hand Warmer

Air-activated hand warmers deliver hours of warmth and relief from cold weather. Once the package is opened, an exothermic reaction begins providing an effective defense against the winter cold.



HW-10P

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HW-10P	Hand Warmer, pack of 10	PK	1

PERSONAL PROTECTION EQUIPMENT

Masks

Pleated Mask - 5-500M

- 3-Ply Medical Style Pleated Mask
- Non-Sterile, General Purpose Use
- Splash Proof Inner Layer
- Behind the Ear Attachment



5-500M

KN95 Mask-5 - 500KN

- Particle Filtering Efficiency (PFE) \geq 95% of 0.3 Micron Particles
- 5-Layer Protection of High-Quality Non-Woven Fabric, Hot Air Cotton and Melt Blown Fabric
- Adjustable Nose Clip Seals and Prevents Fogging
- Dual Elastic Ear-loop Secures Mask to Face
- Not a NIOSH Approved Respirator



5-500KN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-500M	Pleated Masks, pack of 50	PK	1
5-500KN	KN95 Masks, pack of 50	PK	1

Jackson Safety V30 Nemesis Safety Glasses



SG-NV30CC
JACKSON

- Feature a sporty, flexible, lightweight design that your employees will be happy to wear; they have a stylish, sporty look and feel
- Meets ANSI Z87.1+ standards for personal eye protection
- Polycarbonate lenses provide 99.9% UVA/UVB/UVC protection
- Patented FLEX-DRY designed to be extremely flexible, to channel sweat away from the eyes, and to help prevent slippage down the nose - all for long-term comfort

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SG-NV30CC	Jackson Safety V30 Nemesis Safety Glasses - Clear Anti-Fog Lenses with Camo Frame, Case/12	CS	1
SG-NV30CB	Jackson Safety V30 Nemesis Safety Glasses - Smoke Anti-Fog Lenses with Camo Frame, Case/12	CS	1
SG-NV30BC	Jackson Safety V30 Nemesis Safety Glasses - Clear Lenses with Black Frame, Case/12	CS	1
SG-NV30B	Jackson Safety V30 Nemesis Safety Glasses - Clear Anti-Fog Lenses with Black Frame, Case/12	CS	1

DISPOSABLE TOWELS

WypAll® Plus Towels

Absorbs grease, oil, water and solvents from floors, hands, parts, tools and machinery. Tough enough for extra heavy jobs. Comes in a convenient pop-up box of 100 towels.



5-05790

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-05790	WypAll® Plus Towels - White, pack of 100	PK	9

Teri® Reinforced Towels

The Teri® reinforced towels feature multi-tissue reinforced with nylon webbing for added strength on the job. Made from 100% recycled paper. Towel size is 9-3/4" x 16-3/4". Towel color is white. Comes in a convenient pop up box. 126 towels/box. 10 boxes/case.



5-34790

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-34790	Teri® Reinforced Towels, pack of 126	PK	10

Kimtex® Shop Towels

Long lasting Kimtex® stands up to oils, chemicals and solvents better than ordinary shop towels. Cloth-like feel and performance. Towel size is 9-3/4" x 16-3/4". 100 towels/box. 5 boxes/case.



5-33570

KIMTECH

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-33570	Kimtex® Shop Towels, pack of 100	PK	5

SAFETY AND CONSUMABLES | COMPONENTS & CONSUMABLES

DISPOSABLE TOWELS CONT'D

WypAll® X70 Cloths

The economical alternative to scrap rags. Heavy-duty cloths made with high-tech HydroKnit® fast-absorbing material. Durable and tough construction lets them stand up to any task. Can be reused time and time again. Available in white or blue.



5-41455

WYPALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-41411	WypAll® X70 Cloths, 9-3/4" x 16-3/4" Blue, pack of 100	PK	10
5-41455	WypAll® X70 Cloths, 9-3/4" x 16-3/4" White, pack of 100	PK	10

WypAll® ShopPro X80 Towels

Like a rental shop towel, only more consistent. Engineered to feel like cloth and work even better. Absorbs more oil and water faster pound for pound than laundered shop towels. The ShopPro X80 is simply the heaviest duty towel in the Kimberly Clark line. 160 towels/box.



5-41041

WYPALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-41041	WypAll® ShopPro X80 Towels, pack of 160	PK	1

SHOE COVERS

Shoe Covers

Slip these shoe covers on in seconds to protect carpet, tile, or wood from dirt and scuff marks. Customers will appreciate your professional appearance.



SC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-1	Navy Blue Shoe Covers, pack of 50 pairs	PK	1
SC-1WP	Waterproof Shoe Covers, pack of 50 pairs	PK	1

SAFETY SUPPLIES

First Aid Kits

10 and 25-unit first aid kits packaged in economy plastic boxes to assist when industrial accidents occur.



FAK-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FAK-10	10-Unit First Aid Kit	EA	1
FAK-25	25-Unit First Aid Kit	EA	1

INSECT KILLERS

Sting Less Wasp & Hornet Killer

Kills wasps, hornets and yellow jackets. Very fast-acting when insects are hit directly. Allow approximately 24 hours for those that were not directly hit. This container delivers a 20-foot jet blast to knock down the insects and allow for the user to remain at a safe distance.



436-20

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
436-20	Sting Less Wasp & Hornet Spray - 14 oz. Aerosol	EA	12

Wasp & Hornet Killer

Enforcer® Wasp & Hornet Killer shoots a 20-foot jet blast for instant knockdown of wasps, hornets, and yellow jackets. Enforcer® Wasp & Yellow Jacket Foam is a 20-foot blast of blanketing foam that plugs yellow jacket holes and clings to wasp and hornet nests, preventing their escape.



8-WH16 8-FWH16

ENFORCER

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8-WH16	Enforcer Wasp & Hornet Killer - 16 oz. Aerosol	EA	12
8-FWH16	Enforcer Wasp & Yellow Jacket Foam - 16 oz. Aerosol	EA	12

COMPONENTS & CONSUM. | HVAC MAINTENANCE CHEMICALS

Maintenance Chemical Solution Quick Reference Guide

<i>MasterCare</i>				
EQUIPMENT TYPE	TRIPLE-D®	ECO-COIL™	PRO-BROWN™	PRO-BLUE™
Condenser Units	X	X	X	X
No Rinse		X		
Evaporator Units	X	X		
No Rinse	X	X		
Safe On Rubber Roof Tops	X			
Safe On Fan Blades, Grilles, Etc.	X	X		
Safe On Electronic Air Filters	X	X		
Safe On Permanent Filters	X	X		
Microchannel Coils	X	X		
Small Condenser Coils	X	X	X	X
Small Evaporator Coils	X	X		
Mini-Splits	X	X		
APPLICATION SOLUTION				
Brightener			X	X
Condensate "Gunk"	X	X	X	X
Degreasing	X		X	X
Deodorizer	X	X		
Dirt and Grime	X	X	X	X
Disinfectant	USE SANI C-N-D™ COIL AND DRAIN DISINFECTANT			
Hersite Coated Coils		X		
Oxide Deposits			X	X
Remove Minerals				
CHEMICAL TYPE				
Alkaline	X	X	X	X
Acidic				
DILUTION (PRODUCT: H2O)				
Condensers	1:6	1:3	1:3	1:3
Evaporators	1:10	1:6		
Evaporators (No Rinse)	1:20	1:6		
PACKAGING AVAILABLE				
4 Ounce Concentrate	TRIPLE-D-1SHOT			PRO-BLUE-1SHOT
4X Concentrate Quart	TRIPLE-D-4X			PRO-BLUE-4X
19 Ounce Aerosol	TRIPLE-D-AER	ECO-COIL-AER		PRO-BLUE-AER
1 Quart Trigger Sprayer	TRIPLE-D-RTU			
32 Ounce Bottle				
1 Gallon	TRIPLE-D	ECO-COIL	PRO-BROWN	PRO-BLUE
5 Gallon				
55 Gallon Drum				PRO-BLUE-55
ENVIRONMENTAL				
Biodegradable	X	X	X	X
Meets EPA's Design for the Environment Alternative Program as Green		X		
FOOD COMPLIANCE				
USDA Approved	X	X		X
NSF Registered	X	X	X	X

HVAC MAINTENANCE CHEMICALS | COMPONENTS & CONSUM.

Maintenance Chemical Solution Quick Reference Guide CONT'D


<i>MasterCare</i>				
EQUIPMENT TYPE	PRO-GREEN™	PRO-RED PLUS™	PRO-YELLOW™	PRO-KLEEN™
Condenser Units	X	X	X	X
No Rinse	X			
Evaporator Units	X			
No Rinse	X			
Rubber Roof Tops				
Fan Blades, Grilles, Etc.	X			
Electronic Air Filters	X			
Permanent Filters	X			
Microchannel Coils	X			
Small Condenser Coils	X	X	X	X
Small Evaporator Coils	X			
Mini-Splits	X			
APPLICATION SOLUTION				
Brightener		X	X	X
Condensate "Gunk"	X	X	X	X
Degreasing		X	X	X
Deodorizer	X			
Dirt and Grime	X	X	X	X
Disinfectant	USE SANI C-N-D™ COIL AND DRAIN DISINFECTANT			
Hersite Coated Coils				
Oxide Deposits		X	X	X
Remove Minerals				X
CHEMICAL TYPE				
Alkaline	X	X	X	
Acidic				X
DILUTION (PRODUCT: H2O)				
Condensers	1:3	1:3	1:2	1:3
Evaporators	1:3			
Evaporators (No Rinse)	1:3			
PACKAGING AVAILABLE				
4 Ounce Concentrate	PRO-GREEN-1SHOT	PRO-RED-1SHOT		
4X Concentrate Quart	PRO-GREEN-4X	PRO-RED-4X		
19 Ounce Aerosol	PRO-GREEN-AER			
1 Quart Trigger Sprayer				
32 Ounce Bottle				
1 Gallon	PRO-GREEN	PRO-RED+	PRO-YELLOW	PRO-KLEEN
5 Gallon				
55 Gallon Drum				
ENVIRONMENTAL				
Biodegradable	X	X	X	X
Meets EPA's Design for the Environment Alternative Program as Green				
FOOD COMPLIANCE				
USDA Approved	X			
NSF Registered	X	X	X	

COMPONENTS & CONSUM. | HVAC MAINTENANCE CHEMICALS

COIL CLEANERS

MasterCare® Triple-D® Universal Coil Cleaner

MasterCare® Triple-D® is the ultimate universal coil cleaner that can be used on condensers, evaporators, microchannels, roof-top units, and mini-split applications. The triple active synergistic highly effective solution is formulated to remove a broad range of soils while degreasing and deodorizing. It is ideal for cleaning most metals including aluminum and copper while extending equipment life and diminishing the potential for refrigerant leaks. Using 75% less than comparable products, it reduces the amount of solution needed to clean. Triple-D® is biodegradable, NSF approved and available in a variety of packaging configurations.

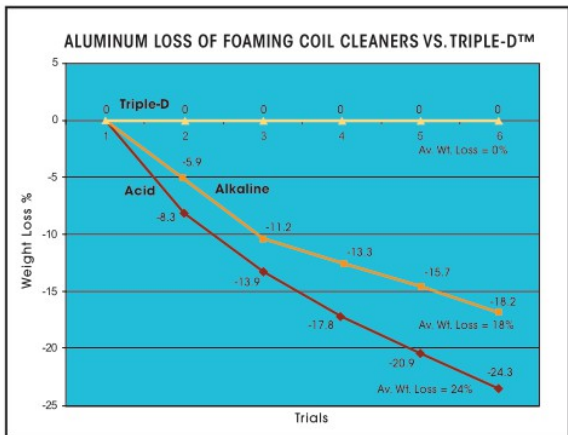

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TRIPLE-D	MasterCare® Triple-D® - 1 Gallon Concentrate	EA	4
TRIPLE-D-AER	MasterCare® Triple-D® - 19 oz. Aerosol	EA	12
TRIPLE-D-AER-6	MasterCare® Triple-D® - 19 oz. Aerosol, 6 Pack	EA	6
TRIPLE-D-4X	MasterCare® Triple-D® - 4x Concentrate	EA	12
TRIPLE-D-1SHOT	MasterCare® Triple-D® - 4 oz. Concentrate	EA	14
TRIPLE-D-RTU	MasterCare® Triple-D® - 1 Qt. Pre-Mixed Sprayer	EA	12

Conventional foaming acid and non-acid coil cleaners attack and chemically react with the aluminum coil components. This reaction is exhibited by a foaming action. The attack/reaction dissolves the aluminum, destroying the heat-transfer ability of the coil and creating the potential for refrigerant leaks.

MasterCare® Pro-Blue™

MasterCare® Pro-Blue™ is a heavy foaming alkaline-based solution designed for condensers and mini-splits that penetrates dirt and grease removing deposits resulting in clean and brightened coils. Pro-Blue is biodegradable, NSF approved, and available in numerous packaging configurations.



Eco-Coil™ Environmentally Friendly Coil Cleaner

Eco-Coil™ is an environmentally friendly no rinse non-corrosive cleaner ideal for evaporator and condenser coils, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications. Eco-Coil quickly cleans away dirt, dust, and deposits while deodorizing with no harmful risks to animal, aquatic or plant life. Tested to provide the highest level of performance, Eco-Coil not only reduces the number of products required to clean but also has different water mixture ratios to maximize solution usage. Furthermore, it brightens, biodegradable, NSF approved, and meets the EPA's Design for the Environment Alternative Program as a "green" product.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-BLUE	MasterCare® Pro-Blue™ Foaming Concentrate (non-acid) - 1 gallon container	EA	4
PRO-BLUE-AER	MasterCare® Pro-Blue™ - 19 oz. Aerosol	EA	6
PRO-BLUE-4X	MasterCare® Pro-Blue™ - 4x Concentrate	EA	12
PRO-BLUE-1SHOT	MasterCare® Pro-Blue™ - 4 oz. Concentrate	EA	14
PRO-BLUE-55	MasterCare® Pro-Blue™ - 55 Gallon Drum	EA	1



MasterCare® Pro-Green™

MasterCare® Pro-Green™ is a no rinse, mild alkaline coil cleaner that can be used on air-cooled condensers, evaporators, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications. Pro-Green cleans deposits on coils and rids condensate pans of slime. It is NSF approved for use in federally inspected plants and available in numerous packaging configurations.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ECO-COIL	Eco-Coil™ Environmentally Friendly Coil Cleaner - 1 Gallon Container	EA	4
ECO-COIL-AER	Eco-Coil™ - 19 oz. Aerosol	EA	1



MasterCare® Pro-Brown™

MasterCare® Pro-Brown™ is a heavy duty alkaline cleaner that pulls out deeply embedded dirt removing greasy soils and oxidation while brightening and cleaning coils. Ideal for air-cooled condensers and mini-splits thanks to its dual action foaming capabilities. It is biodegradable.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-GREEN	MasterCare® Pro-Green™ No Rinse - 1 Gallon Container	EA	4
PRO-GREEN-AER	MasterCare® Pro-Green™ - 19 oz. Aerosol	EA	6
PRO-GREEN-4X	MasterCare® Pro-Green™ - 4x Concentrate	EA	12
PRO-GREEN-1SHOT	MasterCare® Pro-Green™ - 4 oz. Concentrate	EA	14

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-BROWN	MasterCare® Pro-Brown™ Foaming Coil Cleaner - 1 Gallon Container	EA	4

HVAC MAINTENANCE CHEMICALS | COMPONENTS & CONSUM.

COIL CLEANERS CONT'D

MasterCare® Pro-Red Plus™

MasterCare® Pro-Red Plus™ is a fast acting cleaning solution for condensers, microchannels, and mini-splits that foams and lifts away stubborn deposits including tarnish and corrosion. Its corrosion inhibitors protect even sensitive metals like aluminum and copper. Its non-acid formula is as effective as conventional acid cleaners without the use of hydrofluoric acid. The vigorous foaming action eliminates the need for prolonged soaking, steam cleaning or scrubbing coils and without emitting corrosive fumes or rusting ferrous metals. Pro-Red Plus™ is biodegradable, NSF approved, and available in a number of convenient packaging solutions.



PRO-RED+
MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-RED+	MasterCare® Pro-Red Plus™ Cleaner and Brightener (non-acid) - 1 Gallon container	EA	4
PRO-RED-4X	MasterCare® Pro-Red Plus™ - 4x Concentrate	EA	12
PRO-RED-1SHOT	MasterCare® Pro-Red Plus™ - 4 oz. Concentrate	EA	14
PRO-RED+5	MasterCare® Pro-Red Plus™ - 5 Gallon Pail	EA	1

Coil Guard™

Ideally used in coastal areas, where salt air accelerates rust and decay. Highly recommended for use in all geographical areas to prolong the life of a unit. When applied properly, Coil Guard™ dries quickly and immediately resists salt spray, acids, and soap solutions. Weather will not blacken it. Coil Guard™ has high dielectric properties and has no effect on heat transfer. Our blue tinted product is used to ensure complete coverage of coating.



CG-AER

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CG-AER	Clear Coil Guard™ - 20 oz. Aerosol	EA	12
CGB-AER	Blue Coil Guard™ - 20 oz. Aerosol	EA	12

Cool-Weld™ Heat Barrier Spray

Spray on thick gel formula that protects surfaces from heat and damage. Odorless, non-toxic gel coats rubber, plastic, and painted surfaces to shield them during welding or soldering.



COOLWELD-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
COOL-WELD-32	Cool-Weld™ Heat Barrier Spray - 32 oz. Container	EA	12

Foam-Plus™ Aerosol Foaming Coil Cleaner

Heavy-duty foaming detergent coil cleaner in an aerosol can. Non-flammable and water-based with no chlorinated solvents. Blasting foam stream reaches into tight areas for maximum cleaning. The foaming alkaline detergent quickly liquifies dirt, grease, oil or other residue and is completely self-rinsing on condensate producing coils.



358-20

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
358-20	Foam-Plus™ Foaming Coil Cleaner - 19 oz.	EA	12

MasterCare® Pro-Yellow™

MasterCare® Pro-Yellow™ is a powerful cleaner ideal for condensers, microchannels, and mini-splits that targets large concentrations of dirt and grime. With its heavy foaming alkaline-based solution, debris will be removed from the coil while providing excellent brightening. Pro-Yellow is biodegradable and available in a number of packaging solutions.



PRO-YELLOW
MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-YELLOW	MasterCare® Pro-Yellow™ (non-toxic) - 1 Gallon Container	EA	4

MasterCare® Pro-Kleen™

A unique foaming acid coil cleaner designed to replace hazardous hydrofluoric acid coil cleaners. It contains a synergistic combination of mineral acids, corrosion inhibitors, biodegradable surfactants, penetrants, and degreasers that emulsify, solubilize and neutralize soils leaving a clean, bright, efficient coil surface.



PRO-KLEEN
MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-KLEEN	MasterCare® Pro-Kleen™ Outdoor Coil Cleaner - 1 Gallon container	EA	4

Pan-Patch™

Pan-Patch™ is a two part epoxy coating designed for HVAC applications. It is a self leveling formula that is ideal in a damp or wet environment. Pan-Patch™ resists corrosion and stops pan leaks without replacing the pan. Light gray in color, one gallon covers about 160 square feet with 10 mil thickness.



PANPATCH-BAG

CATALOG NO.	DESCRIPTION	COVERAGE	UOM	ORDER MUL.
PAN-PATCH-BAG	Pan-Patch™ Pan Sealant - Bag, pack of 10	8 sq. ft.	EA	10
PANPATCH	Pan-Patch™ Pan Sealant - 1 Gallon	160 sq. ft.	EA	4

COMPONENTS & CONSUM. | HVAC MAINTENANCE CHEMICALS

COIL CLEANERS CONT'D

SpeedClean® SpeedyFoam®

Foaming, non-acid, non-fuming, and water soluble. SpeedyFoam cleaner and degreaser removes grime, oil, and grease from condenser and evaporator coils, mechanical equipment, and air filters. Non-caustic and safe for all metals, including aluminum.



SC-FCC-1



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-FCC-1	SpeedClean® SpeedyFoam® Coil Cleaner, 1 Gallon	EA	4
SC-FCC-5	SpeedClean® SpeedyFoam® Coil Cleaner, 5 Gal. Pail	EA	1

SpeedClean® SpeedyBright®

Scientifically formulated to dissolve all types of limescale, rust, and calcium carbonate deposits from water passages and heating elements. SpeedyBright improves operating efficiency in tankless water heaters, gas/electric water heaters, and other water heating/heat exchange systems. Extend the usable life of cleaned equipment by quickly and safely removing energy robbing contaminants. Phosphoric acid based cleaner classified by UL to NSF/ANSI Standard 60.



SPDYBRT-CS



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SPDYBRT-CS	SpeedClean® SpeedyBright® Cleaner, 2 x .5 Gallon	EA	2
SPDYBRT-05	SpeedClean® SpeedyBright® Cleaner, 5 Gallon Pail	EA	1

SYSTEM FLUSHES

Pro-Flush® HVAC Flushing Solvent

A flushing solvent for A/C and refrigeration systems formulated for R410A retrofits, refrigerant conversions and compressor burnouts. Compatible with all refrigerants and compressor oils. All solvents in Pro-Flush® conform to EPA SNAP standards, and are low toxicity and residue free. Available as a kit or in an 8 or 16 oz. solvent refill. The kit makes servicing quick, easy, and safe, as well as assuring you get to the job site with all necessary hardware in hand for 1 stop servicing. The kit includes: 8 oz. container of Pro-Flush® solvent, refillable Pro-Flush® injector tool pressure tank, pressure relief valve for added safety, large rubber adapter that flushes up to 1-1/4" line sets, service hose.



PF-KIT

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PF-KIT	Pro-Flush® Kit - injector, 8 oz. refill, nozzle adapter and hose	EA	3
PF-08	Pro-Flush® HVAC Flushing Solvent - 8 oz. Refill	EA	6
PF-16	Pro-Flush® HVAC Flushing Solvent - 16 oz. Refill	EA	6
PF-ADAPTER	Pro-Flush® Line Set Adapter	EA	1
PF-IGUN	Replacement Injector Tool	EA	1
PF-IHOSE	2" Replacement Hose	EA	1

MasterCare® Super Change™

Super Change eliminates oil change outs replacing R22 line set conversion flushes. Ideal for dry charged units, retrofits, and drop-in refrigerants, Super Change maximizes oil return and heat transfer including POE charged compressors. Reusable hose (20122) included. Also available in flexible injectable hose (991-MC).



991-MC

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
981	MasterCare® Super Change™ Refrigerant Retrofit	EA	6
991-MC	MasterCare® Super Change™ Refrigerant Retrofit, Hose	EA	4

HVAC MAINTENANCE CHEMICALS | COMPONENTS & CONSUM.

LEAK DETECTION

Bubble-N-Trouble™ Freeze Protected Spray-On Leak Detector

Non-corrosive, non-toxic, and biodegradable. Does not attack metal or interfere with brazing or soldering. Spray-on application allows easy access for hard to reach places. Tacking agent holds solution on test surface making Bubble-N-Trouble™ very economical. USDA AUTHORIZED



BNT-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BNT-32	Bubble-N-Trouble™ Freeze Protected Leak Detector - 32 oz. Spray	EA	12
BNT-1	Bubble-N-Trouble™ Freeze Protected Leak Detector - 1 Gallon Container	EA	4

Radiant Leak Finder™

Radiant color and viscous clinging formula exposes the smallest leaks. Freeze-protected – remains effective down to 0° F.



RLF-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RLF-8	Radiant Leak Finder™ - 8 oz. Container	EA	12

UV Pocket Light

UV Pocket Light with 3 AAA batteries included. A great light to pair with 995 Flex Inject® Sealant and 990 Flash™ Detect Inject.



89DC

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
89DC	UV Pocket Light	EA	12

Patriot Pocket Worklight

A three light integrated rechargeable system that includes a red top light (30 lumens), 250 lumen front light, and a 390-400nm wavelength UV light. Patriot charger sold separately (11110A).



111110 111110A

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111110	Patriot Worklight	EA	6
111110A	Patriot Worklight Charger	EA	6

MasterCare® Pro-Bubble™ Leak Detector

Easy-to-use, high-bubbling, viscoelastic blue leak detector. New improved formula.



PRO-BUBBLE-32
MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-BUBBLE-32	MasterCare® Pro-Bubble™ Leak Detector - 32 oz. Spray	EA	12

MasterCare® LeakArmor™ UV Dye

MasterCare® LeakArmor™ UV Dye is an integrated UV dye solution that injects without the use of tools or manifold gauges. LeakArmor UV Dye travels with the speed of the refrigerant once installed, finding leaks within minutes. Using a patented misting orifice, LeakArmor UV Dye uses the refrigerant as the propellant, ensuring a no-mess injection every time. Can be used with all HFC refrigerants.



990

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
980	MasterCare® LeakArmor™ UV Dye	EA	12
990	MasterCare® LeakArmor™ UV Dye, Hose	EA	6

SEEKERmax™

High powered UV light with rechargeable 2200 mAh lithium-ion battery with no UV enhancing glasses required. Finds leaks day or night. 4 hours of continuous use.



87DCPLUS

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
87DCPLUS	SEEKERmax™ UV LED Worklight	EA	1

COMPONENTS & CONSUM. | HVAC MAINTENANCE CHEMICALS

AC SEALANTS

MasterCare® LeakArmor™ Easy Shot™ with UV Dye

MasterCare® LeakArmor™ Easy Shot™ with UV dye eliminates moisture, finds and stops leaks, and prevents future leaks. Fast and easy to install; requires no pump down or recovery. Compatible with all oils and refrigerants and ideal for all systems including microchannel, heat pump and geothermal. Kit includes hose and sealant for medium systems between up to 6 tons. 2 oz. vacuum packed can.



MasterCare® LeakArmor™ Easy Shot™

MasterCare® LeakArmor™ Easy Shot™ eliminates moisture, stops leaks, and prevents future leaks. Fast and easy to install; requires no pump down or recovery. Compatible with all oils and refrigerants and ideal for all systems including microchannel, heat pump and geothermal. Kit includes hose and sealant for medium systems up to 12 tons. 2 oz. vacuum packed can.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
972KIT	MasterCare® LeakArmor™ Easy Shot™ with UV Dye	EA	12

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
944KIT	MasterCare® LeakArmor™ Easy Shot™	EA	12

MasterCare® LeakArmor™ Flex Shot™

MasterCare® LeakArmor™ Flex Shot™ hoses and inject adapters are the fastest, most effective proven way to permanently seal and prevent minor air conditioning and refrigeration (AC/R) leaks. With no tools or gauges required, the Flex Shot sealant works by traveling through the system in the gas phase with the oil and refrigerant fixing leaks immediately. Flex Shot works with all compressors, heat pumps, condensers, and other system components with 1/4" SAE high- and low-side service ports. It will not plug up manifold gauges, metering devices, thermostatic expansion valves (TXVs), pistons or cause cap tube blockages. It meets the ASHRAE ARI 700 refrigerant standard and is compatible with any refrigerant including R-410A with no pump downs or recoveries required. Flex Shot is suitable for use in aluminum and copper coils and is microchannel friendly. 0.3 oz single use hose.



Pro-Tite™ Resin Based Thread Sealant

Resin based thread sealant that adheres to internal surfaces, fills voids while forming a flexible fluid tight seal. Specifically formulated for use on metals and plastics subject to extreme vibration. Serviceable at temperatures from 100°F (73°C) to 400°F (204°C) and from full vacuum to 10,000 PSI. Pro-Tite™ is impervious to most chemicals including refrigerants, petroleum products, gases, steam, etc. Alcohol based.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CLL-1	Pro-Tite™ Thread Sealant - 1-1/3 oz. Squeeze Tube	EA	12
CLL-4	Pro-Tite™ Thread Sealant - 4 oz. Brush Top	EA	12

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
985	MasterCare® LeakArmor™ Leak Sealant, Hose w/Inject Adapters Attached	EA	6
985S-MC	MasterCare® LeakArmor™ Leak Sealant, Hose	EA	6
985M-MC	MasterCare® LeakArmor™ Leak Sealant, 4 Hoses	EA	4
995	MasterCare® LeakArmor™ Leak Sealant with UV Dye, Hose w/Inject Adapters Attached	EA	6
995S-MC	MasterCare® LeakArmor™ Leak Sealant with UV Dye, Hose	EA	6
995M-MC	MasterCare® LeakArmor™ Leak Sealant with UV Dye, 4 Hoses	EA	4
IA-MC	MasterCare™ LeakArmor™ FlexShot™ Inject Adapters	EA	6

HVAC MAINTENANCE CHEMICALS | COMPONENTS & CONSUM.

SYSTEM ADDITIVES

Acid Eliminator

Keeps acid away; compatible with all refrigerants and oils. Chemically neutralizes and prevents acids that are formed in air conditioning and refrigeration systems due to refrigerant and refrigeration oil break-down, moisture, and compressor burnout. Easy-to-use, no complicated charts. Works fast, circulates quickly, and leaves no solids or solid residuals. Will not harm system components. Can prevent system breakdown.



ACID-ELIM

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACID-ELIM	Acid Eliminator - 4 oz. Plastic Bottle	EA	12

MasterCare® Boost Juice® Performance Enhancer

MasterCare® Boost Juice® is an HVAC/R system performance improvement additive that lowers energy costs by reducing the amperage draw up to 22% (testing average of 13%) on a system when running. It does this by lubricating the components, removing moisture and oxygen, and dissolving particle debris to a molecular level. This debris is captured in the liquid line drier reducing drag and friction for the refrigerant and oil. By using Boost Juice, your customers can expect to see noticeable improvements in system performance typically within 24 to 72 hours (depending on the state of the system – new versus old) with consistent performance. Noise levels will also be reduced once Boost Juice is installed providing a long-term benefit to your customers.



992-MC

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
992-MC	MasterCare® Boost Juice® Performance Enhancer	EA	4
993KIT	MasterCare® Boost Juice® Performance Enhancer Kit	EA	6

MasterCare® D'Scale™ Acid Scale Remover for Cooling Towers

MasterCare® D'Scale™ is a low-foaming scale remover that quickly removes scale, corrosion and rust from cooling towers. D'Scale™ has pH indicating dye. The color changes to yellow when acid has been consumed. Each gallon dissolves 3 pounds of scale.



D-SCALE

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D-SCALE	MasterCare® D'Scale™ Acid Scale Remover - 1 Gallon Container	EA	4

Pro-Thaw™ Liquid Dryer for Refrigerants

Chemically dries all refrigerants (R-12, R-22, R-134a, etc.), methyl chloride and methylene chloride. Frees up systems frozen due to moisture contamination in 5 minutes and prevents refreezing. Does not contain any dissolved solids, leaves no residue and works with or without solid dryers.



PRO-THAW



PRO-THAW-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-THAW-1	Pro-Thaw™ - 1 oz. Plastic Bottle	EA	24
PRO-THAW	Pro-Thaw™ - 4 oz. Plastic Bottle	EA	12

Acid Test Kit™

Detects acid in refrigeration oil. Convenient, one-step test means no chemicals to mix. Easy to evaluate. Color change indicates acidity; color intensity reveals the amount of acid present in the oil sample.



ATK-4



ATK-1



ATK-1P

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ATK-4	Acid Test Kit™, pack of 4	EA	4
ATK-1	Acid Test Kit™	EA	1
ATK-1P	Acid Test Kit™ for POE Oil	EA	1

MasterCare® Super-Kool™ Nickel-Safe and Metal-Safe Ice Machine Cleaner

An economical, fast-acting, non-foaming acid sequestrant formula that quickly removes soil and mineral buildup. This safe, highly-concentrated, inhibited formula will not attack nickel or other metal components. USDA AUTHORIZED



SUPER-KOOL

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SUPER-KOOL-16	MasterCare® Super-Kool™ Ice Machine Cleaner - 16 oz. Bottle	EA	12
SUPER-KOOL	MasterCare® Super-Kool™ Ice Machine Cleaner - 1 Gallon Container	EA	4

Pro-Lube-VAC™ Vacuum Pump Oil

VP-68 Premium Vacuum Pump Oil is now based on a highly refined paraffinic based stock. This new improved formulation is lighter in color and provides better viscosity and oxidation stability than the previous formulation. VP-68 provides excellent cold start performance; formulated to meet minimum moisture content specifications.



VP68-01

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VP68-32	Pro-Lube-VAC™ Vacuum Pump Oil - 1 Quart Jug	EA	12
VP68-01	Pro-Lube-VAC™ Vacuum Pump Oil - 1 Gallon Jug	EA	4

COMPONENTS & CONSUM. | HVAC MAINTENANCE CHEMICALS

DEODORIZERS

Duct-Fresh™ Gel

A non-toxic, super-effective odor neutralizer for HVAC ducts, proficient at destroying stubborn odors including pet, smoke, and musty smells in residential, industrial and commercial applications. Effective for up to 6 months.



DUCT-FRESH-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DUCT-FRESH-8	Duct-Fresh™ Gel - 8 oz.	EA	12
DUCT-FRESH-16	Duct-Fresh™ Gel - 16 oz.	EA	8
DUCT-FRESH-40	Duct-Fresh™ Gel - 40 oz.	EA	8

The Purifier™

The Purifier™ is an electric device that removes stubborn odors like tobacco smoke. It eliminates mold, mildew and bacteria from HVAC systems, using the latest in ozone purification technology. The Purifier™ completes most jobs in just 20 minutes. Includes programmable timer with LCD display.



170AIR

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
170AIR	The Purifier™ Fresh Air Ozone Machine	EA	1
170AIRFAN	Replacement Fan	EA	1
170AIRPCB	Replacement Circuit Board	EA	1
UVEC-07G	12V Charger for Cigarette Lighter	EA	1
410212	Replacement UV Bulb	EA	1

Duct-Fresh™ Spray

A non-toxic, instantaneous, super-effective odor neutralizer for HVAC ducts. Destroys stubborn pet odors, smoke, and musty smells in residential, industrial and commercial applications. Great for spot-treating malodor problem areas.



DUCT-FRESH-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DUCT-FRESH-32	Duct-Fresh™ Spray - 1 Quart	EA	12

Odor-Aid™

Cleans and deodorizes with an easy pump spray. Eliminates offensive odors from coils and ducts.



171AIR

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
171AIR	Odor-Aid™ - 7 oz. Bottle with Spray Top	EA	12

DISINFECTANTS

Sani C-N-D™ Coil and Drain Pan Disinfectant

Sani C-N-D™ is an EPA registered disinfectant, fungicide, mildewstat and viricide. It is ready-to-use and assures consistent, effective results. Sani C-N-D™ destroys "dirty sock," mildew and other malodors.



SANI-CND

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SANI-CND-32	Sani C-N-D™ Disinfectant - 32 oz. Container	EA	12
SANI-CND	Sani C-N-D™ Disinfectant - 1 Gal. Container	EA	4
SANI-CND-5	Sani C-N-D™ Disinfectant - 5 Gallon Pail	EA	1
SANI-CND-55	Sani C-N-D™ Disinfectant - 55 Gallon Drum	EA	1

DRAIN PAN REPAIR

Pan-Kote Heavy Duty Drain Pan Patch

A super-durable rubberized coating used to fill-in and patch HVAC drain pans. Seals out rust and corrosion. Stays flexible in variable weather conditions.



641-14

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
641-14	Pan-Kote Drain Pan Patch - 14 oz. Aerosol	EA	12

HVAC MAINTENANCE CHEMICALS | COMPONENTS & CONSUM.

COIL PROTECTANT

Pro-Lube-POE™ Polyolester

Pro-Lube POE is custom formulated for use in refrigeration compressors. This specialty lubricant is compatible with new HFC refrigerants as well as CFC and HCFC refrigerants.



POE32-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
POE32-32	SUS150 ISO32 Pro-Lube-POE™ Polyolester - 1 Quart Can	EA	12

GLYCOLS

DiversiTech produces a complete line of industrial coolant and heat transfer products in the HVAC/R Industry. Our product line includes ProTek PG propylene glycol products formulated with food-grade corrosion inhibitors and ProTek EG ethylene glycol products for industrial applications. Both product groups are designed to provide freeze and burst protection and are formulated with inhibitors and antifoam agents to provide long-term stability against system corrosion and fouling.

ProTek EG™

An inhibited ethylene glycol based heat transfer fluid designed for use in hydronic, chilled and closed water.



EG

CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MUL.
EG	ProTek EG™ - 1 Gallon Jug	95/5	EA	4
EG-5	ProTek EG™ - 5 Gallon Pail	95/5	EA	1
EG-55	ProTek EG™ - 55 Gallon Drum	95/5	EA	1

ProTek PG 100™

ProTek 100™ is an inhibited propylene glycol based industrial heat transfer fluid and antifreeze that contains food grade corrosion inhibitors. It is suitable for use in potable water systems. ProTek 100™ is designed to provide freeze and burst protection, excellent thermal conductance, protection against corrosion and fouling and long term stability in closed recirculating water loops. ProTek 100™ provides burst protection to 100°F. Freeze points and burst points are controlled by the propylene glycol to water ratio.



PG-100

CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MUL.
PG-100	ProTek-100™ - 1 Gallon Jug	70/30	EA	4
PG-100-5	ProTek-100™ - 5 Gallon Pail	70/30	EA	1
PG-100-55	ProTek-100™ - 55 Gallon Drum	70/30	EA	1

ProTek PG Plus™

ProTek PG PLUS™ is an inhibited propylene glycol based industrial heat transfer fluid and anti freeze that contains food grade corrosion inhibitors. It is suitable for use in potable water systems. ProTek PG PLUS™ is designed to provide freeze and burst protection, excellent thermal conductance, protection against corrosion and fouling and long term stability in closed recirculating water loops. ProTek PG PLUS™ must be mixed with water to provide freeze and burst protection. Freeze points and burst points are controlled by the propylene glycol to water ratio.



PG-PLUS

CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MUL.
PG-PLUS	ProTek-Plus™ - 1 Gallon Jug	95/5	EA	4
PG-PLUS-5	ProTek-Plus™ - 5 Gallon Pail	95/5	EA	1
PG-PLUS-55	ProTek-Plus™ - 55 Gallon Drum	95/5	EA	1

ProTek BG™ for Cast Iron Water Boilers


A red liquid boiler grade product formulated specifically with corrosion inhibitors necessary for use in water boilers.



PG-BG

CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MUL.
PG-BG	ProTek-BG™ - 1 Gallon Jug	70/30	EA	4
PG-BG-55	ProTek-BG™ - 55 Gallon Drum	70/30	EA	1

INDOOR AIR QUALITY

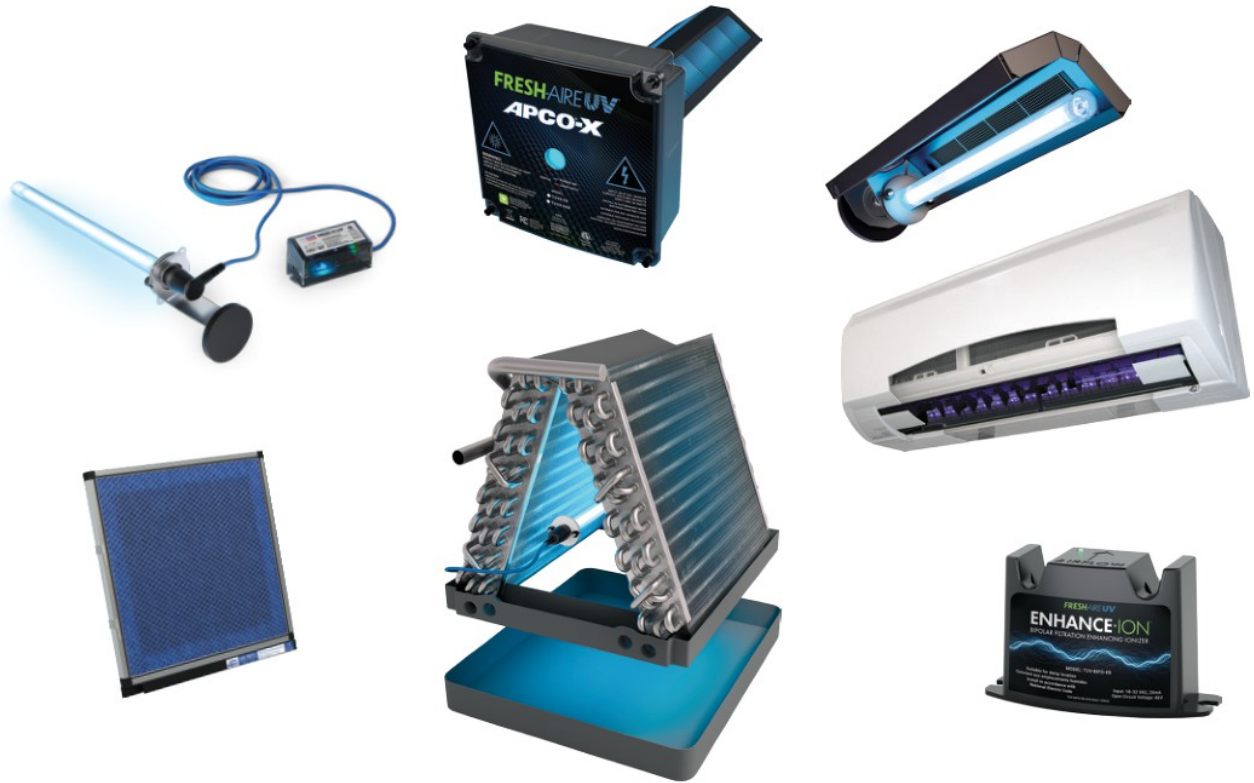

INDOOR AIR QUALITY - RESIDENTIAL

Coil and Airstream Disinfection	203
Air Filtration	204-205
Filtration Enhancement Ionization	204
Ductless Mini-Split	204
Replacement UV lamps	205



INDOOR AIR QUALITY

COIL AND AIRSTREAM DISINFECTION

APCO-X

APCO-X is the result of more than a decade of development and is our most advanced indoor air treatment system and is 30% more effective than our original APCO. It combines UVC light with our EverCarbon™ catalyst to safely & effectively neutralize odor-causing VOCs and biological contaminants. It not only treats the air but also helps keep the HVAC system clean and efficient and extend its life. Dual systems include a second remote-mounted UV light typically mounted at the coil. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-APCOX-ER3

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCOX-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-DER3 (Dual System)	18-32 VAC	TUVL-315 (2)	3 Years	EA	1
TUV-APCOX-SI3-P	110-277 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-DI3-P (Dual System)	110-277 VAC	TUVL-315 (2)	3 Years	EA	1

APCO

The original APCO system cleans the air by combining UVC light and activated carbon; two technologies proven to be most effective at neutralizing germs, and odor-causing by reducing chemical vapors known as volatile organic compounds (VOCs). It also helps keep the HVAC system clean and efficient and extend its life. Dual systems include a second remote-mounted UV light typically mounted at the coil. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-APCO-ER2

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCO-ER	18-32 VAC	TUVL-115	1 Year	EA	1
TUV-APCO-ER2	18-32 VAC	TUVL-215	2 Years	EA	1
TUV-APCO-DER (Dual System)	18-32 VAC	TUVL-115 TUVL-115-P	1 Year	EA	1
TUV-APCO-DER2 (Dual System)	18-32 VAC	TUVL-215 TUVL-215-P	2 Years	EA	1
TUV-APCO-SI2-P	110-277 VAC	TUVL-215	2 Years	EA	1
TUV-APCO-DI2-P (Dual System)	110-277 VAC	TUVL-215 TUVL-215-P	2 Years	EA	1

APCO RT

Similar to the Original APCO but smaller, with four carbon cells. APCO RT is designed for narrower ducts and limited-space installations. It cleans the air by combining UVC light and activated carbon and helps keep the HVAC system clean. Dual systems include a second remote-mounted UV light typically mounted at the coil. Validated to UL2998 for zero ozone. Includes lifetime warranty.




TUV-APCO-RT-ER2

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCO-RT-ER2	18-32 VAC	TUVL-211	2 Years	EA	1
TUV-APCO-RT-ST2	110-277 VAC	TUVL-211	2 Years	EA	1
TUV-APCO-RT-DT2 (Dual System)	110-277 VAC	TUVL-211 TUVL-215P	2 Years	EA	1

APCO-X MAG

APCO-X MAG combines UVC light with our EverCarbon™ catalyst to safely & effectively neutralize odor-causing VOCs and biological contaminants. It features a 110 lb. rubber coated antivibration magnet for mounting inside air system. It not only treats the air but also helps keep the HVAC system clean and efficient and extend its life. Dual systems include a second remote-mounted UV light typically mounted at the coil. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-APCOX-MAG15-ER3

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCOX-MAG15-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-MAG15-ST3	110-277 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-MAG15-DT3 (Dual System)	110-277 VAC	TUVL-315 (2)	3 Years	EA	1
TUV-APCOX-MAG11-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-MAG11-ST3	110-277 VAC	TUVL-315	3 Years	EA	1

APCO MAG


APCO MAG is designed for internal mounting using a magnet (or screws) and is available with either a 15" lamp (6 cells) or 11" lamp (4 cells). Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-APCOX-MAG15-ER3

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCO-MAG11-ER2	18-32 VAC	TUVL-111P	1 Year	EA	1
TUV-APCO-MAG15-ER2	18-32 VAC	TUVL-211P	2 Years	EA	1
TUV-APCO-MAG15-DT2 (Dual System)	110-277 VAC	TUVL-211P (2)	2 Years	EA	1

APCO-X Furnace Installation

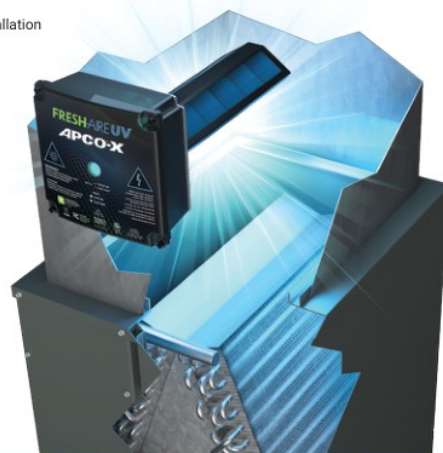

INDOOR AIR QUALITY

COIL AND AIRSTREAM DISINFECTION

Blue-Tube UV-X

Blue-Tube UV-X is our most advanced HVAC UV light yet, with longer lamp life and an improved electronic power supply. It features a 110 lb. rubber coated antivibration magnet for mounting inside air system. It's the simple, safe, and effective way to keep the HVAC system clean and improve indoor air quality. The powerful UVC light neutralizes germs continuously and is known for its reliability, ease of installation, innovative features and quality components. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-BTX-ER3

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-BTX-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-BTX-ST3	110-277 VAC	TUVL-315	3 Years	EA	1

Blue-Tube UV

Blue-Tube UV is the single most popular germicidal UV light product for HVAC systems in the world. Home owners breathe easy knowing that the air their family breathes is protected by this proven technology. Blue-Tube UV is the simple, safe, and effective way to keep your air system clean and improve indoor air quality. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-BT-ER2

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-BT-ER	18-32 VAC	TUVL-115P	1 Year	EA	1
TUV-BT-ER2	18-32 VAC	TUVL-215P	2 Years	EA	1
TUV-ST-ER	110-277 VAC	TUVL-115P	1 Year	EA	1
TUV-ST-ER2	110-277 VAC	TUVL-215P	2 Years	EA	1

AIR FILTRATION

Purity Whole House

The Purity Whole House System offers the ultimate enhancement to indoor air quality. The system features not one but three unique technologies (UV Reactive Filter, Germicidal UV Light, Photocatalytic Media) that actively reduce airborne microbial contaminants. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-PRT-ER-21

CATALOG NO.	DIMENSIONS (AIR HANDLER)	UOM	ORDER MUL.
TUV-PRT-(ER/ST/SP)-14	14" W x 22" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-17.51	17.5" W x 22" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-19.75	19.75" W x 22" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-21	21" W x 22" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-22.5	22.5" W x 22" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-24.5	24.5" W x 22" D x 8" H	EA	1

CATALOG NO.	DIMENSIONS (FURNACE)	UOM	ORDER MUL.
TUV-PRT-(ER/ST/SP)-14F	14" W x 28" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-17.5F	17.5" W x 28" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-21F	21" W x 28" D x 8" H	EA	1
TUV-PRT-(ER/ST/SP)-24.5F	24.5" W x 28" D x 8" H	EA	1

AHU Series 1

The AHU Series 1 germicidal UV light system is installed in the central air system where it neutralizes mold, viruses and bacteria. It also suppresses mold growth on the cooling coils and surrounding areas while generally improving indoor air quality throughout the home. It features a water-tight commercial grade power supply and is available in single & dual lamp configurations for comprehensive UV light disinfection. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-200D-I

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-100S-I	110-277 VAC	TUVL-115P	1 Year	EA	1
TUV-100D-I (Dual System)	110-277 VAC	TUVL-115P	1 Year	EA	1
TUV-200S-I	110-277 VAC	TUVL-215P	2 Years	EA	1
TUV-200D-I (Dual System)	110-277 VAC	TUVL-215P	2 Years	EA	1

FILTRATION ENHANCEMENT IONIZATION

ENHANCE-ION

ENHANCE-ION™ is installed inside the air system to improve indoor air quality. ENHANCE-ION enhances the ability of the HVAC filter to capture airborne contaminants and pollutants such as PM2.5 (fine particulate matter less than 2.5 microns in diameter), as well as airborne contaminants and pollutants effectively turning a standard filter into a high-efficiency filter. In laboratory tests, ENHANCE-ION increases capture efficiency by up to 30%. Includes a 3 year warranty.



TUV-BIPO-ER

CATALOG NO.	ELECTRICAL	DIMENSIONS	UOM	ORDER MUL.
TUV-BIPO-ER	18-32 VAC	5"L x 3.1"H x 1.9"D	EA	1

DUCTLESS MINI-SPLIT

Mini UV LED

Mini UV LED is the first-of-its-kind UV light LED system for mini-splits and similar limited space applications. Like all A/C systems, mini-splits are prone to internal mold growth and microbial contamination, particularly on and near the blower wheel. The replaceable 5-year LED light strip in is designed to keep surfaces clean while having no impact on plastic materials. Validated to UL2998 for zero ozone. Includes 5 year warranty.



TUV-MINI-LED-SW

CATALOG NO.	ELECTRICAL	LED LIFE	UOM	ORDER MUL.
TUV-MINI-LED-SW	110-277 VAC	5 Years	EA	1

Mini UV LED
in mini-split



INDOOR AIR QUALITY

AIR FILTRATION

Purity Low Profile (PLP)

PLP offers high-efficiency polarized filtration with low static pressure which provides continuous (multiple pass) high-efficiency filtration. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-PLP-20X20NB

(PLP) Replacement Media

Media should be replaced every 3-6 months on average.



TUV-PLP-20X20NB

CATALOG NO.	SIZE	ELECTRICAL	UOM	ORDER MUL.
TUV-PLP-16X20NB	16" X 20"	24VAC	EA	1
TUV-PLP-16X25NB	16" X 25"	24VAC	EA	1
TUV-PLP-18X20NB	18" X 20"	24VAC	EA	1
TUV-PLP-18X25NB	18" X 25"	24VAC	EA	1
TUV-PLP-20X20NB	20" X 20"	24VAC	EA	1
TUV-PLP-20X25NB	20" X 25"	24VAC	EA	1

CATALOG NO.	SIZE	UOM	ORDER MUL.
TUV-PLPM-1-16X20NB	16" X 20"	EA	1
TUV-PLPM-1-16X25NB	16" X 25"	EA	1
TUV-PLPM-1-18X20NB	18" X 20"	EA	1
TUV-PLPM-1-18X25NB	18" X 25"	EA	1
TUV-PLPM-1-20X20NB	20" X 20"	EA	1
TUV-PLPM-1-20X25NB	20" X 25"	EA	1

REPLACEMENT UV LAMPS

Residential Replacement UV Lamps

UVC lamps lose effectiveness over time but will continue to produce visible light after they have lost their germicidal effectiveness. For this reason it is necessary to replace them every one, two, or three years depending on type.

CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-315	15"	3 Years	TUV-APCOX-ER3 TUV-APCOX-DER3 TUV-APCOX-SI3-P TUV-APCOX-DI3-P TUV-APCOX-MAG15-ER3 TUV-APCOX-MAG15-ST3 TUV-APCOX-MAG15-DT3	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-311	11"	3 Years	TUV-APCOX-MAG11-ER3 TUV-APCOX-MAG11-ST3	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-215	15"	2 Years	TUV-APCO-SI2-P TUV-APCO-DI2-P	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-215P	15"	2 Years	TUV-BT-ER2 TUV-BT-ST2	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-115	15"	1 Year	TUV-APCO-ER TUV-APCO-DER	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-115P	15"	1 Year	TUV-BT-ER TUV-BT-ST	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-211	11"	2 Years	TUV-APCO-MAG11-ER2 TUV-APCO-RT-ER2 TUV-APCO-RT-ST2 TUV-APCO-RT-DT2 TUV-AKT8-DER2	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-211-OS-N9	11"	2 Years	TUV-AKT8-ER2 TUV-AKT8-DER2	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-200F	15"	2 Years	TUV-PRT-(ER/ST/SP)	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-MINI	8"	1 Year	TUV-MINI	EA	1



About DiversiTech

Founded in 1971, DiversiTech® Corporation is North America's largest manufacturer of equipment pads and a leading manufacturer and supplier of components and related products for the heating, ventilating, air conditioning, and refrigeration (HVAC/R) industry. Headquartered in the Atlanta, Ga. metropolitan area, DiversiTech's mission for its wholesaler partners is to simplify their work. The Company is focused on growth through internal product development, external partnerships, and acquisition. Manufacturing a suite of products, which includes a wide range of mechanical, electrical, chemical, and structural parts for HVAC/R systems, DiversiTech brings unparalleled scaling capabilities and supplier expertise. The Company holds numerous patents and operates an advanced R & D materials division dedicated to bringing more value to its customers. The Company maintains over 1 million square feet of manufacturing and distribution space in key U.S., Canadian and European locations. DiversiTech has enjoyed a continued history of successful growth and has acquired industry recognized brand names including hilmor®, Imperial®, Quick-Sling®, UltraLite®, Spin® Tools, SpeedClean®, and Fresh-Aire UV®.



Duluth, GA 30097
678.542.3600
800.995.2222
www.diversitech.com
©2023 DiversiTech Corporation

